

ACCESSORIES

MINI PAWNEE

- A:** Floor brush 300 mm
A1. Dust chassis 300 mm
A2. Liquid vacuum chassis 300 mm
A3. Upholstery chassis 300 mm
B: Glass washer 250 mm
C: Ø 30 brushes
C1. N° 3 nylon brushes
C2. N° 1 steel brush
C3. N° 1 brass brush
D: Nozzle 150 mm
D1. Bristled brush insert 150 mm
D2. Rubber insert 150 mm
E: Transparent nozzle
F: Anti - scale vials
G: Accessories set
G1. Novaltec Multigrass
G2. Sprayer
G3. Steam lance
G4. Plunger
G5. Nozzle 80 mm
G6. Filler funnel
G7. Flat lance
H: Handle grip
H1. Complete handle grip
H2. Rigid extensions

PAWNEE PAWNEE/R

- A:** Floor brush 430 mm
A1. Dust chassis 430 mm
A2. Liquid vacuum chassis 430 mm
A3. Upholstery chassis 430 mm
B: Glass washer 250 mm
C: Ø 30 brushes
C1. N° 4 nylon brushes
C2. N° 1 steel brush
C3. N° 1 brass brush
D: Nozzle 150 mm
D1. Bristled brush insert 150 mm
D2. Rubber insert 150 mm
E: Transparent nozzle
F: Anti - scale vials
G: Accessories set
G1. Novaltec Multigrass
G2. Sprayer
G3. Steam lance
G4. Plunger
G5. Nozzle 80 mm
G6. Filler funnel
G7. Flat lance
H: Handle grip
H1. Complete handle grip
H2. Rigid extensions

BLACK HAWK BLACK HAWK/R

- A:** Floor brush 430 mm
A1. Dust chassis 430 mm
A2. Liquid vacuum chassis 430 mm
A3. Upholstery chassis 430 mm
B: Glass washer 250 mm
C: Ø 30 brushes
C1. N° 4 nylon brushes
C2. N° 4 steel brushes
C3. N° 4 brass brushes
D: Nozzle 150 mm
D1. Bristled brush insert 150 mm
D2. Rubber insert 150 mm
E: Transparent nozzle
F: Anti - scale vials
G: Accessories set
G1. Novaltec Multigrass
G2. Sprayer
G3. Steam lance
G4. Plunger
G5. Nozzle 80 mm
G6. Filler funnel
G7. Flat lance
H: Handle grip
H1. Complete handle grip
H2. Rigid extensions
N3: Ø 60 nylon brush



OPZIONAL

- I:** Bristled brass brush insert 150 mm
L: Blown air kit (just for Mini Pawnee)
M: Steam only wand kit
N: Ø 60 brushes
N1. Brass brush
N2. Steel brush
N3. Nylon brush
O: Vacuuming steam lance with nozzle
P: Vacuuming steam brush soft bristle



NOVALTEC GROUP reserves the right to change equipment or accessories specification without prior notice.



Novaltec Group has been working professionally for 15 years producing and distributing commercial steam vacuum cleaners.

Being innovative and adopting state of the art technologies, Novaltec offers a full range of cleaning equipment. This cleaning equipment is manufactured to a high standard and fulfil both CE and PET requirements.

The company's competence and vast knowledge make Novaltec a leading company in the cleaning equipment sector. Novaltec Group strives to take care of all its customers' needs and requirements.

Novaltec Group at Scorzè - VE



Why not take a virtual tour of the company using Google maps? Just type Novaltec address into your search bar

OZOSANY 3.5 - 7.0

TECHNICAL DATA OZOSANY 3.5
 Capacity: 28.3 lt/min. - 1700 lt/h
 Sanitizable space: 360-420 m³
 Technology: plates generator
 Gas source: air
 Cooling method: air
 Power supply: 220-240 V - 60 Hz
 Power: 75 W max
 Ozono output: 3.5 gr/h

TECHNICAL DATA OZOSANY 7.5
 Capacity: 28.3 lt/min. - 1700 lt/h
 Sanitizable space: 720 - 840 m³
 Technology: plates generator
 Gas source: air
 Cooling method: air
 Power supply: 220-240 V - 60 Hz
 Power: 125 W max
 Ozono output: 7.0 gr/h

DIMENSIONS
 Height: 250 mm
 Width: 200 mm
 Depth: 285 mm
 Weight: 5,5 kg



Novaltec Group s.r.l
 Via Pier Santi Mattarella, 28
 30030 Gardigiano di Scorzè
 Venice - Italy
 T +39 041 449949
 F +39 041 5830575

info@novaltegroup.com
 www.novaltegroup.com

Follow us:

Where to use:



PAWNEE

EXTRACTORS - STEAM GENERATORS
 RELIABLE POWERFUL
 MULTI - PURPOSE



HydroClean

MINI PAWNEE

TECHNICAL DATA
 Power supply: 230 V - 50/60 Hz
 Vacuum engine: 1000 W
 Boiler heating element: 1900 W
 Steam pressure: 4,5 ± 0,3 Bar
 Boiler steam inner temperature: 150° C
 Boiler volume: 2,6 L
 Dirt collection tank capacity: 9 L
 Control panel supply: 12 V
 Feeding cable: 6 m

DIMENSIONS
 Height: 534 mm
 Width: 393 mm
 Depth: 430 mm
 Weight: 13 kg



PAWNEE

TECHNICAL DATA
 Power supply: 230 V - 50/60 Hz
 Vacuum engine: 1000 W
 Boiler heating element: 2000 W
 Steam pressure: 5,0 ± 0,3 Bar
 Boiler steam inner temperature: 160° C
 Boiler volume: 3 L
 Dirt collection tank capacity: 9 L
 Control panel supply: 12 V
 Feeding cable: 6 m

DIMENSIONS
 Height: 748 mm
 Width: 412 mm
 Depth: 472 mm
 Weight: 15 kg



PAWNEE/R

TECHNICAL DATA
 Power supply: 230 V - 50/60 Hz
 Vacuum engine: 1000 W
 Boiler heating element: 2000 W
 Steam pressure: 5,0 ± 0,3 Bar
 Boiler steam inner temperature: 160° C
 Boiler volume: 3 L
 Dirt collection tank capacity: 9 L
 Water tank capacity: 4,8 L
 Chemical tank capacity: 1 L
 Control panel supply: 12 V
 Feeding cable: 6 m

DIMENSIONS
 Height: 748 mm
 Width: 412 mm
 Depth: 472 mm
 Weight: 17 kg



BLACK HAWK

TECHNICAL DATA
 Power supply: 230 V - 50/60 Hz
 Vacuum engine: 1200 W
 Boiler heating element: 2000 + 1200 W
 Steam pressure: 6,3 ± 0,3 Bar
 Boiler steam inner temperature: 175° C
 Boiler volume: 5 L
 Dirt collection tank capacity: 9 L
 Control panel supply: 12 V
 Feeding cable: 6 m

DIMENSIONS
 Height: 785 mm
 Width: 435 mm
 Depth: 548 mm
 Weight: 19 kg



BLACK HAWK/R

TECHNICAL DATA
 Power supply: 230 V - 50/60 Hz
 Vacuum engine: 1200 W
 Boiler heating element: 2000 + 1200 W
 Steam pressure: 6,3 ± 0,3 Bar
 Boiler steam inner temperature: 175° C
 Boiler volume: 5 L
 Dirt collection tank capacity: 9 L
 Water tank capacity: 4,8 L
 Chemical tank capacity: 1 L
 Control panel supply: 12 V
 Feeding cable: 6 m

DIMENSIONS
 Height: 785 mm
 Width: 435 mm
 Depth: 548 mm
 Weight: 19 kg



THE EXTRACTORS
 STEAM GENERATORS

FULFIL
 HACCP



DESIGNED AND
 MADE IN ITALY



DEGREASE
 DISINFECT
 DRY UP



SWEEP
 WASH
 DRY UP

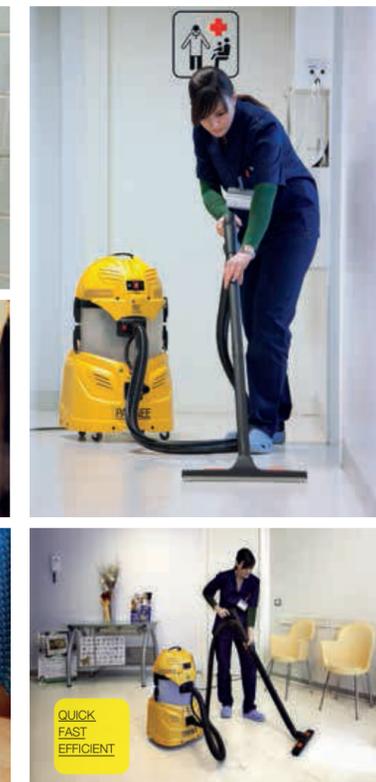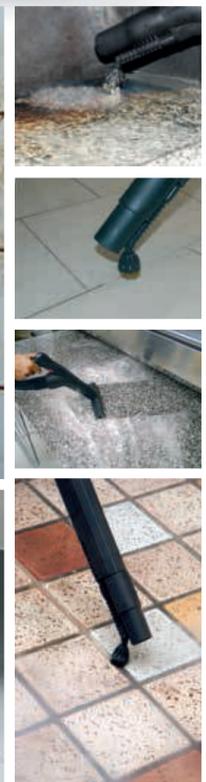

QUICK
 FAST
 EFFICIENT



REMOVES GREASE - ELIMINATES BACTERIA, GERMS AND DUST MITES - LEAVING BRIGHT AND COMPLETELY DRY SURFACES

CLEANS DOWN MAKING - CLEANING PRODUCTS - UNNECESSARY AND - DISINFECT IN ONLY ONE STEP

CLEANS DOWN MAKING - CLEANING PRODUCTS - UNNECESSARY AND DISINFECT IN ONLY ONE STEP