

HEAVY DUTY

ELETTRICO / ELECTRIC

WSF 4000 - 4050 - 5000 - 6000



ACCESSORI STANDARD STANDARD ACCESSORIES



920mm
Lancia con pistola automatica da 920 mm.
920 mm. lance with automatic trigger gun



Tubo alta pressione da 10 metri
10 meters high pressure hose

Dimensioni tubo / Hose dimensions

R2 5/16	R2 3/8
WSF4000	WSF4050 WSF5000 WSF6000

CARATTERISTICHE FEATURES

- TST**
TOTAL STOP
- SBS**
STAND-BY STOP
- WATER LEAK**
- DSS**
DROP STOP SYSTEM
- SWL**
SECURITY WATER LEVEL

IMBALLAGGIO / PACKAGING



150x85x115 cm

240 kg

CARATTERISTICHE / FEATURES

Codice Code	Modello Model	Portata Flow Rate lt/min	Pressione / Pressure		Pompa / Pump		Potenza / Power		Tensione Voltage Volts	Frequenza Frequency Hertz	Fase Phase	Uscita Outlet °C Max
			Bar	Bar	rpm	rpm	HP	kW				
3.023.24.333	WSF4000	15	200	200	1450	1450	7.5	5.5	400 V	50	3	150°
3.023.24.334	WSF4050	21	150	150	1450	1450	7.5	5.5	400 V	50	3	150°
3.023.24.335	WSF5000	21	200	200	1450	1450	10	7.5	400 V	50	3	150°
3.023.24.364	WSF6000	30	200	200	1450	1450	15	11	400 V	50	3	150°

Disponibile anche a 60Hz / Available at 60Hz

HEAVY DUTY

ELETTRICO / ELECTRIC

WSF 4000 - 4050 - 5000 - 6000



MOTORE / ENGINE




Motore elettrico MAZZONI senza manutenzione asincrono monofase serie MEC, con termiche sugli avvolgimenti.
MAZZONI MEC series maintenance-free electric induction motor with thermic protection on the windings

Giunto elastico
Elastic coupling

POMPA / PUMP



Pompa professionale in linea (a bielle) con testata in ottone e tre pistoni in ceramica.
In line professional pump (with connecting rods), brass head, and three ceramic pistons.

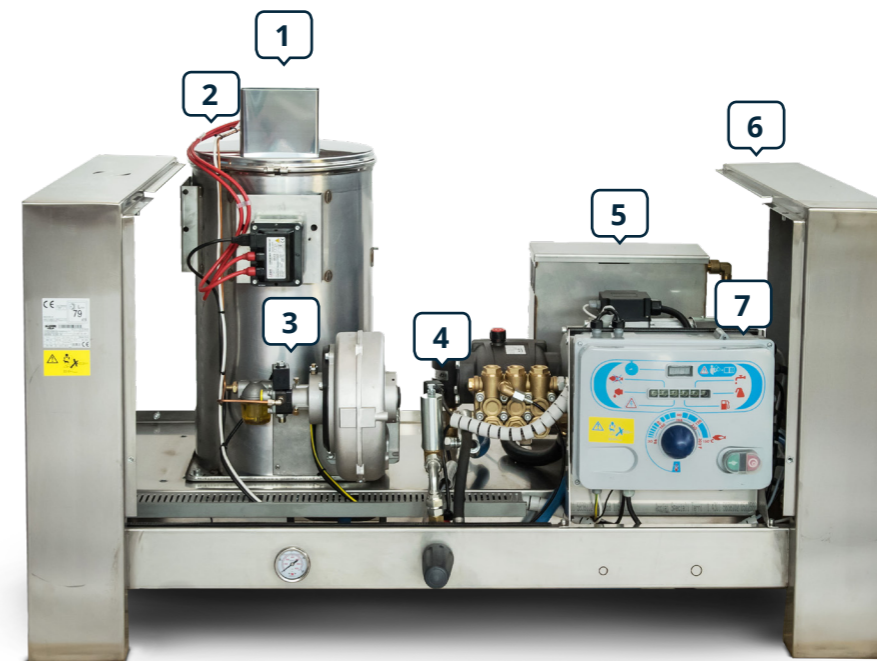


CARATTERISTICHE TECNICHE / TECHNICAL FEATURES

- | | |
|---|--|
| <ol style="list-style-type: none"> 1 Caldaia INOX con serpentina in tubo d'acciaio e arresto bruciatore in caso di mancanza acqua 2 Controllo fiamma 3 Pompa gasolio anti grippaggio 4 Valvola di sicurezza per le sovrappressioni 5 Vasca acqua da 10 litri con controllo livello 6 Telaio in acciaio INOX 7 Pannello di controllo <ul style="list-style-type: none"> ✓ Valvola by-pass automatica con regolazione della pressione ✓ Sicurezza mancanza acqua ✓ Display contatore ✓ Accumulatore per vibrazioni | <p>Stainless steel heater with steel pipe coil and burner safety device
In case of lack of water</p> <p>Flame control</p> <p>Anti-seizure diesel pump</p> <p>Safety valve for overpressure</p> <p>10 litre water tank with float water level</p> <p>Stainless steel chassis</p> <p>Control panel</p> <p>Automatic by-pass valve with pressure regulation</p> <p>Water safety device</p> <p>Hour counter display</p> <p>Dampner</p> |
|---|--|

ACCESSORI OPZIONALI / OPTIONAL ACCESSORIES ● 4000 ● 4050 ● 5000 ● 6000



3.039.04.001 ●●●
Comando a distanza / Remote control



3.037.02.007 ●●●●
Prolunga antivento / Wind protection



1.075.04.007 ●●●●
Pannello posteriore / Rear panel



3.056.04.002 ●●●●
Vasca anticalcare / Antiscale tank



3.056.04.001 ●●●
Serbatoio gasolio con galleggiante
Fuel tank with level switch



3.003.34.002 ●●●●
Kit erogazione esterna detergente
External detergent kit



3.037.02.002 ●●●●
Prolunga camino
Chimney extension



9.00.9521 + 9.00.9768 ●●●●● **9.00.9021 + 9.00.9765**
Awolgitubo murale in acciaio verniciato oppure INOX
Painted steel or stainless steel wall-mounted hose reel