




Stationary 1-pump high pressure washers for flexible cleaning

- NA6 and C3 high-quality heavy industrial motor pumps with brass pump heads
- 1450 rpm; 4 full ceramic pistons and double roller bearings
- The industrial pumps make it possible to feed the units with hot inlet water from 70°C (with break tank) to 85°C (direct feed) for max. cleaning efficiency
- Powered by 1450 rpm (50 Hz) closed industrial motor
- NA5.2 reinforced wobble disc pump
- 3 ceramic pistons and brass pump head
- Foam sprayer for use of detergent on SC UNO 5M L
- Accessory kit for immediate plug & play use
- Low pump oil safety function and warning lamp
- Hour counter and service warning lamp
- NEO control system; enabling optional functions: Remote control, low water safety etc.

The SC UNO range offer models from 5M and 5M L, to 6P and 7P. Industrial stationary cold high pressure water washers with new innovative steps to meet the specific cleaning needs and designed to meet heavy-duty cleaning challenges with convincing performances.

These machines offer a variety of configurations according to user situations – at an attractive price level. Furthermore, intuitive user functions and the opportunity to customize the machines with equipment suited for your environment ensure high productivity.

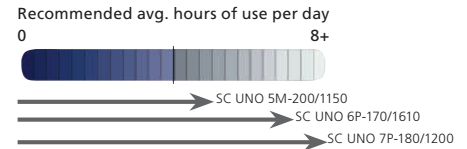

TECHNICAL DATA	SC UNO 5M-200/1050	SC UNO 5M-200/1050 L	SC UNO 6P-160/2500	SC UNO 6P-170/1610	SC UNO 6P-200/1900	SC UNO 7P-180/1200
Pump pressure (bar/MPa)	200/20	200/20	150/15	170/17	180/18	180/18
Cleaning impact (kg/force)	5.5	5.5	12	7.9	10	5.9
Water flow Qmax/Qiec (l/h)	1050/960	1050/960	2500/2400	1600/1500	2100/1900	1200/1080
Max. inlet temperature (°C)	60	60	80	80	80	80
Pump (RPM)	1450	1450	1450	1450	1450	1450
Length x width x height (mm)	355x860x560	355x860x560	355x860x560	355x860x560	355x860x560	355x860x560
Weight (kg)	74	74	88	84	88	81
Power consumption (kW)	6.1	6.1		8.8		6.7
Voltage/phase/frequency/current (V/~/HZ/A)	400/3/50/13	400/3/50/13	400/3/50/	400/3/50/16	400/3/50/	400/3/50/15
Suction height - primed (m)	2.5	2.5	2.5	2.5	2.5	2.5
El cable (m)	5	5	5	5	5	5
Ceramic pistons	3	3	4	4	4	4
Nozzle size	.0500	.0500	.1500	.0900	.1100	.0640
FEATURES						
Pump oil warning system	•	•	•	•	•	•
Intelligent pump control system	•		•	•	•	•
Foam Sprayer		•				
Wall mountable	•	•	•	•	•	•
Foam Cabinet, EPP	•	•	•	•	•	•
Motor on-off lamp	•		•	•	•	•
Service warning lamp	•		•	•	•	•
STANDARD EQUIPMENT						
ERGO COUPLING KIT	101119496	101119496	101119496	101119496	101119496	101119496
QUICK COUPLING 3/4 W/GASKET	1602945	1602945	1602945	1602945	1602945	1602945
HOSE DN8 1 WIRE 10M W.ERGO FEMALE COUPL.	101405770	101405770				
HOSE DN10 10 M 2W 3/8X3/8 INCH			6101766	6101766	6101766	6101766
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122		106403122		106403122
SPRAY HANDLE W. SWIVEL LOCK			106402190		106402190	
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010	106403010	106403010	106403010	106403010
NOZZLE 0500 INDICATION RING YELLOW	101119741	101119741				
NOZZLE 0640 INDICATION RING GREEN						101119745
NOZZLE 0900 INDICATION RING BROWN				101119752		
ITEM NO.	107340512	107340510	107340531	107340521	107340530	107340541