



ACCESSORI STANDARD STANDARD ACCESSORIES



920mm
Lancia con pistola automatica da 920 mm.
920 mm. lance with automatic trigger gun



10 Tubo alta pressione da 10 metri
10 meters high pressure hose

Dimensioni tubo / Hose dimensions

R2 3/8

Abbinamenti motore/pompa Engine/pump pairings

	GM	XM
MEC160	×	×
MEC180		×
Benzina Gasoline	×	×

CARATTERISTICHE FEATURES



IMBALLAGGIO / PACKAGING




120x80x113 cm

250 kg



CARATTERISTICHE / FEATURES

Codice Code	Modello Model	Portata Flow Rate lt/min	Pressione / Pressure Bar		Pompa / Pump rpm		Potenza / Power HP kW		Tensione Voltage Volts	Frequenza Frequency Hertz	Fase Phase
			Bar	Bar	rpm	rpm	HP	kW			
3.023.34.201	KXSB15/500	15	500		1450	25	18,6	Benzina / Gasoline			
3.023.34.302	KXSB43/170	43	170		1459	25	18,6	Benzina / Gasoline			
3.023.14.452	KXS15/500	15	500		1450	20	15	400	50	3	
3.023.14.446	KXS21/500	21	500		1450	30	22	400	50	3	
3.023.14.437	KXS43/190	43	190		1450	20	15	400	50	3	

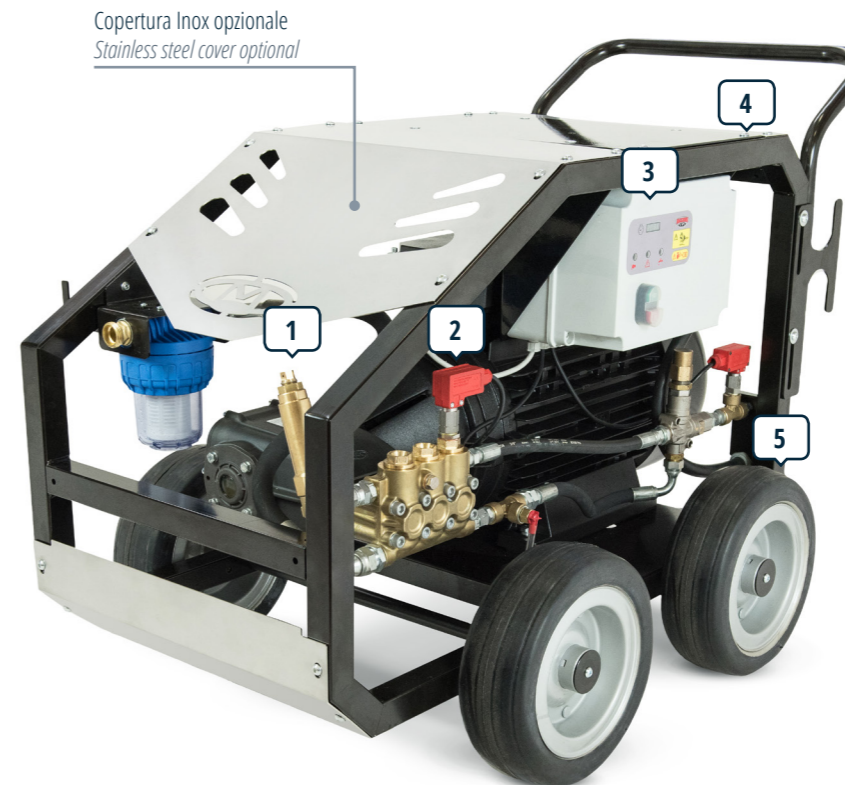

Copertura Inox opzionale
Stainless steel cover optional

CARATTERISTICHE TECNICHE / TECHNICAL FEATURES

- 1 Valvola di sicurezza
 - 2 Valvola by-pass regolabile
 - 3 Quadro elettrico ed interruttore on-off
 - 4 Telaio in acciaio verniciato
 - 5 Freno di stazionamento
- ✓ Contatore interno - solo elettrico ⚡
 - ⚡ Avviamento elettrico - solo KXSB
 - ⚡ Serbatoio combustibile da 13lt - solo KXSB

- Safety valve
- Adjustable by-pass valve
- Switchboard
- Painted steel frame
- Parking brake
- Internal hour meter - only electric ⚡
- Electric start - only KXSB
- 12lt Fuel tank - only KXSB

ACCESSORI OPZIONALI / OPTIONAL ACCESSORIES ● KXSB15/500 ● KXS15/500 ● KXS 21/500

1.033.04.005
Tanica detergente / Detergent tank

3.020.22.066
Kit sabbatura / Sandblasting Kit

3.005.02.053 + 1.086.08.002 ● ●
3.005.02.047 + 1.019.04.004 ● ●
Testina rotojet / Rotojet nozzle

3.061.04.002
Letture ore / Hours reader

Filtro dell'acqua
Water filter

MOTORE / ENGINE



Motore elettrico MAZZONI senza manutenzione asincrono monofase serie MEC, con termiche sugli avvolgimenti.
MAZZONI MEC series maintenance-free electric induction motor with thermic protection on the windings

Giunto elastico - solo elettrico ⚡
Elastic coupling - only electric ⚡

Campana - solo elettrico ⚡
Bell housing - only electric ⚡

POMPA / PUMP

Pompa professionale in linea (a bielle) con testata in ottone e tre pistoni in ceramica.
In line professional pump (with connecting rods), brass head, and three ceramic pistons.

XM



GM



DETTAGLI / DETAILS

