




Gas powered stationary hot water high pressure washers

- Expandable control technology with PLC and special options
- Automatic diagnosis and fault finding
- Efficient gas heating systems
- Galvanised steel frame and cabinet
- Reduced running and service costs
- Compact and easy to install

Gas powered stationary heating for maximum efficiency in the automotive, industrial sectors or other sites possessing a gas supply line, avoiding need to provide diesel fuel supply.

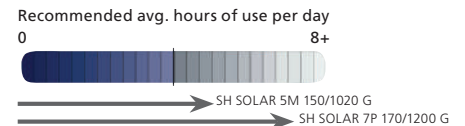

TECHNICAL DATA	SH SOLAR 5M-150/1020 G	SH SOLAR 7P-170/1200 G
Pump pressure (bar/MPa)	150/15	170/17
Cleaning impact (kg/force)	4.5	5.8
Water flow Qmax/Qiec (l/h)	1020/900	1200/1110
Max. inlet temperature (°C)	30	30
Max. temperature (°C)	99	99
Water temperature, ΔT at full flow (°C)	85	85
Pump (RPM)	1450	1450
Length x width x height (mm)	700x900x1100	700x900x1100
Weight (kg)	186	214
Power consumption (kW)	7.5	8.9
Voltage/phase/frequency/current (V~/HZ/A)	400/3/50/15	400/3/50/17
Heating capacity (kW)	93	100
Burner fuel type	NG	NG
Fuel consumption at ΔT=40°C (m³/h)	4.5	5.7
Ceramic pistons	3	4
Nozzle size	.0550	.0680
FEATURES		
Automatic start/stop	•	•
1450 rpm motor	•	•
Galvanised steel frame	•	•
PLC and expandable control electronics	•	•
Gas burner and coil	•	•
Auto fault finding	•	•
Water brake tank	•	•
ITEM NO.	107370450	107370470