




Efficient outdoor cleaning of your vehicle fleet

- Stainless steel robust design against corrosion
- EcoPower boiler for reduced fuel consumption costs
- SilentPower, low noise level with 1450 rpm motor pump units
- Simple control panel with only 4 buttons
- Ergonomic accessories for added user experience
- Internal frost protection down to minus 20°C
- Simple control panel
- Compact design

The SH TRUCK is a simple robust and corrosion proof stationary unit for permanent outdoor placement. Enabling constant cleaning of trucks, vans, commercial and construction vehicles, the SH TRUCK is frost protected for use even in winter.

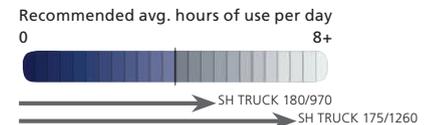

TECHNICAL DATA	SH TRUCK 5M-180/970	SH TRUCK 7P-175/1260
Pump pressure (bar/MPa)	180/18	175/17.5
Cleaning impact (kg/force)	4.9	6.3
Water flow Qmax/Qiec (l/h)	970/930	1260/1170
Max. inlet temperature (°C)	30	30
Water temperature (water/steam) (°C)	90/150	90/150
Pump (RPM)	1450	1450
Length x width x height (mm)	1025x715x1670	1025x715x1670
Weight (kg)	227	262
Power consumption (kW)	7.2	8.2
Voltage/phase/frequency/current (V~/HZ/A)	400/3/50/18	400/3/50/17.5
Fuel tank (l)	33	33
Detergent tank (l)	2 x 25	2 x 25
Ceramic pistons	3	4
Nozzle size	.0550	.0680
Fuel consumption, motor (Diesel) kg/h	4.3	5.3
FEATURES		
Stainless steel frame	•	•
Automatic standby	•	•
QuickService - innovative concept	•	•
Wdk dual detergent injector	•	•
Internal heater and insulation for frost protection	•	•
Flame sensor	•	•
Water brake tank	•	•
STANDARD EQUIPMENT		
ERGO COUPLING KIT	101119496	101119496
HOSE NOZZLE 20R3/4	61369	61369
HOSE DN10 10 M 2W 3/8X3/8 INCH	6101766	6101766
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010
NOZZLE 0550 INDICATION RING NEONGREEN	101119743	
NOZZLE 0680 INDICATION RING GREY		101119747
ITEM NO.	107370830	107370810