



# Clean is Changing Let's change it for the better

Cleanliness is business-critical to both private industry and public institutions. Cleaning processes are continuously developing as the perception of cleaning itself evolves. Our mission is to elevate our commitment to providing first-rate products and services, while integrating key sustainability initiatives. Not just to make for a better clean, but also to strive to be more sustainable, while delivering better business for you, our customer.

#### **Sustainable Cleaning**

Being mindful of cleaning means taking into consideration how we use natural resources like water, while reducing the use of detergents and lowering energy use. This helps lead the way to more sustainable cleaning and can also reduce cleaning costs.

The desire for business and industry to clean more sustainably has grown in recent years, and requirements from customers, suppliers and public facilities have escalated.

Consideration of how cleaning staffs perform tasks; from health and safety to ergonomic design, general crew member well-being, is another factor kthat must be calculated into the sustainability equation.

Additionally, product durability and regular servicing can determine the lifeline and efficiency of machines you deploy to uphold your sustainability strategy. Introducing new solutions based on innovative technology, while utilizing data that enables us to calculate the needs for cleaning, helps propel us to the forefront of cleaning technological development that benefits your business.

#### Commitment to clean

Our commitment to sustainable cleaning is unwavering as we strive to offer products, services and solutions which help us to create a cleaner future for all to enjoy.

How we impact the environment is a critical consideration of our overarching business strategy. We are committed to ambitious climate targets reducing our negative impact, as we leverage opportunities to bring even greater value to our customer base.

We continuously set the bar high for ourselves as we seek to evolve our position as a leader within CSR (Corporate Social Responsibility).

For us, we want to do more than simply provide good advice on sustainable cleaning solutions. We are committed to Science Based Targets initiatives having inspired ambitious climate-impact targets. Lastly, we recently received the EcoVadis Gold Medal: In the rating we achieved our highest score (90 out of 100 points) for our environmental actions - including our commitment to reducing emissions linked to our business activities and through usage of our products.

As your partner on the journey towards sustainability, we hope to make your commitment to conservation and efficiency a comfortable reality. We believe that when this dedication is shared we can deliver real benefit for your business, the environment and the global community as a whole.

Clean is Changing. Let's change it for the better.

## Index

Scrubber dryers	Carpet extractors	Commercial vacuum cleaners
SC506	ES30052	VP100139
SC50 UVGI7	Overview of accessories 53	VP300series
SC608		GD 930 / VP930
SC1009	Pressure Washers	VP600
SC25010	MC 2C	VP600 BATTERY143
SC35111	MC 3C	GD5/10 BACK144
SC401	MC 4M57	GD 5 Battery
SC430	MC 5M PA-FA58	VU500
SC45014	MC 5M PA-FA 59	GU700A147
SC500	MC 6P FA60	VL200148
SC53016	MC 7P FA 61	VL100149
BA/CA 551/61117	MC 8P 62	VL500-35150
BA651/751/85118	MH 3C	VL500-55151
SC800	MH 3M PA	VL500-75
SC150020	MH 4M FA/PA 65	Overview of accessories 153
SC2000	MH 5M66	
BR652/752	MH 5M E	Vacuum cleaners
SC3500	MH 6P	SALTIX 10155
BR755/755C/855	MH 7P	MAXXI II 35 WD
SC5000	MH 8P	MAXXI II 55 WD
SC6000	SC UNO 4M	MAXXI II 75 WD
SC6500	SC UNO 5M, 6P & 7P	AERO 21 / AERO 21 INOX
SC8000	SC DUO 6P & 7P	AERO 26
CS701029	SC DELTA 6P	AERO 26
Overview of accessories 30	SC DELTA 8P	AERO 31 INOX
	SH SOLAR D	ATTIX 30
Sweepers	SH SOLAR E	ATTIX 40 INOX
SW200 / SW250	SH SOLAR G	ATTIX 50
SW75033	SH TRUCK	ATTIX 33
SW90034	SH AUTO 5M	ATTIX 44
SR100034	MC PE / DE	ATTIX 7
SR1101	MC 9P	ATTIX 7 LIQUID VACUUM 169
SW400037	MC 10P	ATTIX 961-01
SW5500	Liquid sprayers	ATTIX 965-21 SD XC
SR160139	HydroScrub	ATTIX 115 & 125
SW800040	Increased flexibility with	ATTIX 15 G 125
Overview of accessories	Nilfisk Accessories & Options 88	SELF-SERVICE (SB) VACUUMS 174
Overview of accessories	Overview of accessories 90	ATTIX 33 M-H
Single-discs	Detergents	ATTIX 44 M-H
FM400 L	Detergents	ATTIX 7 – M-CLASS
FM400 H	Professionel Steam Cleaners	H-CLASS
FM400 D	\$04500	ATTIX 965 H/M SD XC
BU500	SV8000	Accessory sets for Vacuum cleaners 184
BU800	SDV	Accessory sets for vacuum clediters 184
Overview of accessories 50	۱۵/ ۱۵/	
Overview of accessories 50		

TYPE 22	Consumer
Accessories for Vacuum cleaners 221	C 100.7
	C 110.7/ C 110.7 X-TRA 252
Industrial vacuum cleaners	C 120.7
VHS120225	C 125.7 X-TRA 254
VHS120 All-in-one 226	Core 125
VHO200 All-in-one	Core 130
S3B227	Core 140
S3227	Core 140
VHS110 ATEX	Core 150
T30S229	E 145.4260
CTS 22 – CTS 40 – CTT 40 229	E 150.2261
T22 – T40 – T40W – T75 230	E 160.1
T22 – T40 – T40W – T40 HE 230	P 180
3707-3907 series 231	P 190
3997 – 3997W – 3997WC 231	P 200
VHB436	Accessories for Pressure washers 266
VHC110 – VHC120 – VHC200 233	
VHO 200	Nilfisk Buddy II 12270
ECO-OIL 13 – ECO-OIL 22 234	Nilfisk Buddy II 18271
Additive Manufacturing 235	Nilfisk Buddy II 18 Inox 272
IVT1000	Nilfisk Buddy II 18 T 273
VHS110 CR	Multi II 22274
VHW200 – VHW201 –	Multi II 30 T
VHW210 – VHW211237	Accessories for Vacuum cleaners 276
VHW310 – VHW311	
VHW320 – VHW321 238	Nilfisk Supreme
VHW420 – VHW421238	All-in-1 150/250/LCD 278
VHW440/VHW441239	Nilfisk Supreme
R series240	All-in-1 150/250/LCD 279
Pneumatic conveyors 241	Nilfisk Supreme 100 280
Centralized vacuum systems 242	Nilfisk Supreme LCD 281
GM 80P 243	Nilfisk Supreme 250 282
VHS 40244	Nilfisk Supreme 150 283
VHS 42 M-H245	Accessories for Vacuum cleaners 284
IVB 961-0L	
IVB 965 SD XC 247	Professional service 286
IVB 7X – ATEX TYPE 22 248	
IVB 995 ATEX TYPE 22 249	
Overview of accessories 250	

### Liberty SC50 – Autonomous stand on scrubber dryer








#### Freedom to do better

- **Reliable and Safe:** The Liberty SC50 is the only autonomous floor scrubber on the market compliant with CSA/ANSI 336, an OSHA recognized autonomous floorcare safety standard.
- Size and Run-Time: The agile design allows the machine to react to changes in the environment and maintain autonomous operation without operator intervention.
- Simplicity: We added 3 buttons for autonomy.
   Record. Play. Stop. This machine is built for a scrubber operator, not a computer programmer.
- Fill-in Mode: The operator drives around the site to-be cleaned once, and the SC50 calculates the most efficient path to clean the interior of that space, avoiding obstacles along the way. This revolutionary cleaning method is a Nilfisk exclusive.






TECHNICAL DATA	LIBERTY SC50 X51R OBC PH	
Voltage (V)	24	24
Gross weight (gvw) (kg)	484.4	484.4
Height (cm)	144.1	144.1
Length (cm)	135.5	135.5
Max. theoretical productivity (m²/hr)	1,936	1,936
Sound level (IEC60335-2-72) (dB(A)	63	63
Max. transport speed - manual Fwd. (kph)	5.0	5.0
Max. transport speed - manual rev. (kph)	2.6	2.6
Max. transport autonomous (m/s)	1.055	1.055
FEATURES		
Digital reports	•	•
Software updates	•	•
CopyCat mode	•	•
Fill-in mode	•	•
Pause/resume autonomous plan	•	•
USB port	•	•
ITEM NO.	56104508	56104509

### Liberty SC50 UVGI - Autonomous stand on scrubber dryer







# Experience all Liberty SC50 benefits plus the best UV-C disinfection technology to maximize your hygienic standards

- UV-C light is germicidal, meaning it damages the DNA of bacteria, viruses, and other pathogens, thereby preventing them from multiplying and causing diseases.
- The UV-C attachment is located at the rear of the SC50, directly behind the scrubber.
- UV-C light is emitted directly at the floor, in close proximity and at a dosage level that targets coronavirus and other pathogens.
- UV-C light is confined to the floor beneath the SC50, designed for safe operation around people.
- The Liberty SC50's UV-C fixture is compliant with all applicable safety standards, including third party certification.

Meet the Nilfisk Liberty SC50 UVGI autonomous scrubber-dryer, combining Robotic Floor scrubbing with UVGI (ultraviolet germicidal irradiation) technology to maintain the highest level of cleanliness in your facility.



TECHNICAL DATA	Liberty SC50 UVGI	Liberty SC50 UVGI	
Voltage (V)	24	24	
Gross weight (gvw) (kg)	484.4	484.4	
Battery capacity (mAh)	255	255	
Max. theoretical productivity (m²/hr)	1,936	1,936	
Max. transport speed - manual Fwd. (kph)	5.0	5.0	
Max transport speed - manual rev. (kph)	2.6	2.6	
Max. transport autonomous (m/s)	1.055	1.055	
FEATURES			
Autonomous operation	•	•	
Digital reports	•	•	
Software updates	•	•	
Copycat mode	•	•	
Fill-in mode	•	•	
USB port	•	•	
UVGI mode	•	•	
ITEM NO.	CM56104508-02	CM56104509-02	

### Liberty SC60 – Autonomous ride-on scrubber dryer







#### Simplicity and productivity in a large-scale solution

- Best-in-class productivity and runtime
- The largest scrub deck on a comparable BrainOS-enabled robotic scrubber
- Reliable obstacle-detection/avoidance along cleaning path
- Designed according to the Robotic Safety standard
- Intuitive, easy-to-use user interface accelerates setup and adoption
- Regular, cloud-based software updates keep pace with innovation and deliver ongoing value

Built on Brain Corp's powerful BrainOS® – the world's most widely-used autonomous operating system – the high-performance Liberty SC60 also boasts the market's largest scrub deck, exemplary runtime, and minimal downtime requirements.

Its significant cleaning capability makes it ideal for maximizing floorcare quality and efficiency across the world's largest indoor spaces. And, because it's a Liberty solution, its extensive programmability means operators can adapt the SC60 to any layout, in any environment, in a single run.



TECHNICAL DATA	Liberty SC60	Nilfisk Liberty SC60	
Voltage (V)	24	24	
Gross weight (gvw) (kg)	1499	1499	
Min. turn-around aisle width (m)	1.88	1.88	
Max. theoretical productivity (m²/hr)	2811	2811	
Sound level (IEC60335-2-72) (dB(A)	57	57	
Max. transport speed - manual Fwd. (m/sec.)	1.90	1.90	
Max transport speed - manual rev. (m/sec.)	1.24	1.24	
Max. transport autonomous (mph)	2.46	2.46	
FEATURES			
Delivered ready to use (full package)	•	•	
Autonomous operation	•	•	
TextAssist operator alerts	•	•	
Digital reports	•	•	
Software updates	•	•	
Copycat mode	•	•	
Pause/resume autonomous plan	•	•	
STANDARD EQUIPMENT			
TRAY DEBRIS KIT	9100000795	9100000795	
DETERGENT SOLUTION SYSTEM KIT	9100002963	9100002963	
HOME LOCATION PACK-STD	56123087	56123087	
DISC BRUSH-14 PROLENE 3 LUG	56505804		
SKIRT BLADE KIT-RED GUM	56383489	56383489	
BLADE KIT-SQUEEGEE-RED GUM 28	56382735		
BATTERY 6V 390 AH AGM	56123064	56123064	
CHARGER-BATTERY-24VDC-50A-SHLF	56123221	56123221	
ITEM NO.	56123292	56123305	

### SC100 - Small scrubber/dryers







#### Upright scrubber dryer is the master of small space cleaning

- Scrub and dry in one single pass giving fast access to the cleaned area
- Two solution flow settings for efficient cleaning and red LED light indicator alarms when out of solution
- Ergonomic handle for comfortable one or two handed operation
- Easy to carry and to transport from one place to another – only 12 kg weight
- Only use clean solution: no dirt and bacteria spread everywhere on the floor
- Flat recovery tank design and full access makes it fast and easy to clean 100% of the recovery tank from any dirt
- Can do what others cannot: Low deck profile and offset allow to clean difficult to reach areas for real floor cleaning
- Easy and quick maintenance operations help the operator to always have a clean and functional machine
- Flexible cleaning: Eco flow for light cleaning and double flow for spot or hard cleaning
- All machine functions stop in upright position:
   No brush or squeegee on the floor and no solution spill when the machine is not in use
- Robust aluminum frame design guarantee high reliability and long life time
- Detergent dosing cap on solution tank to always have the right percentage of detergent

The Nilfisk SC100 is a small scrubber dryer for in-depth cleaning of narrow areas. Compared to the manual solution of mop and bucket, this compact upright machine will get the job done much faster offering a superior cleaning performance.



TECHNICAL DATA	SC100 E	SC100 E FULL PACKAGE	
Rated power (W)	800	800	
Sound pressure level at 1.5 m (dB(A) ISO 3744)	72 ± 2	72 ± 2	
Productivity theoretical/actual (m²/h)	620/310	620/310	
Scrubbing width (mm)	310	310	
Solution/recovery tank (I)	3/4	3/4	
Brush quantity and type	1 Cylindrical	1 Cylindrical	
Brush speed (RPM)	2100	2100	
Length x width x height (mm)	400x360x1150	400x360x1150	
Gross weight (gvw) (kg)	15	15	
FEATURES			
Detachable cord	•	•	
Automatic solution shut off	•	•	
Solution level indicator	•	•	
Delivered ready to use (full package)	•	•	
Tank in tank solution	•	•	
Two hands working handle	•	•	
STANDARD EQUIPMENT			
BRUSH CYL 310MM MEDIUM WHITE	107411860	107411860	
2-HAND HANDLE	107413470	107413470	
CARPET COMPLETE KIT		107411865	
DETACHABLE CORD 10M EU	107413490 107413490		
MANUAL SUCTION HOSE KIT		107411864	
SQUEEGEE 321MM 13 CARPET KIT		107411868	
SQUEEGEE 321MM 13 KIT	107411867	107411867	
ITEM NO.	107408100	107408103	

### SC250 - Small scrubber/dryers







#### SC250 is scrubbing, sweeping and drying in every corner

- Easy handling: Tank-in-tank design for carrying in one hand provide an easy emptying and refilling
- Effective: Sweeping, scrubbing and drying at the same time.
- High cleaning performance: 34 cm cylindrical brush or microfiber roll
- Productive: The 6 liter solution and recovery tank gives up to 40 minutes of working time without refill
- Powerful: Nilfisk 36V Lithium battery technology
- Easy to use: The ergonomic handle can be adjusted into different positions, used free floating or folded for storage
- Intuitive and self-explaining: Informative display on the handle.
- Full control: OneTouch™ button is activating all essential functions and touch sensors in the handle provide an easy operation
- Non-stop cleaning: The two water/solution settings can be changed on-the-fly
- Safe: Out of Water alarm protecting the machine
- Convenient: Easy to carry and move due to its compact design and low weight
- Low TCO: Long lifetime with 'No tool' inspection, service and maintenance

The Nilfisk SC250 is a compact scrubber dryer for fast and effective cleaning of hard floors, which will take you into every corner and ensure efficient cleaning in both directions – also under furniture and shelves. You will get a light and productive machine with a low sound level suited for daytime cleaning as it is battery-driven. An attractive choice for shops, schools, restaurants, cafes, bakeries, fast food chains, hotels, cleaning companies, etc.



TECHNICAL DATA	SC250 34C B
Voltage (V)	36
Rated power (W)	300
Sound pressure level at 1.5 m (dB(A) ISO 3744)	66 ±3
Productivity theoretical/actual (m²/h)	1360/680
Solution/recovery tank (I)	6/6
Brush quantity and type	1 Cyl
Brush speed (RPM)	1000
Brush pressure (kg)	Max 12
Length x width x height (mm)	630x425x400
Squeegee width (mm)	340
Gross weight (gvw) (kg)	32
FEATURES	
Compact design	•
Lithium battery	•
Delivered ready to use (full package)	•
One-Touch™ Button	•
Tank in tank solution	•
Scrubbing and sweeping	•
STANDARD EQUIPMENT	
BRUSH CYL 340MM MEDIUM NYLON WHITE	9100002066
MINI CONTAINER PLAST. F DIRT SIP	9100001964
SQUEEGEE 360MM PU 2 PCS SET	9100002064
BATTERY LI KIT INCL CHARGER EU UK	9100002056
ITEM NO.	9087380020

### SC351 – Small scrubber/dryers







**TECHNICAL DATA** 

#### Next generation in daily small area scrubbing and drying

- Low noise level for daytime cleaning, even in noise-sensitive areas
- Easy adjustable deck for a perfect traction control
- Adjustable water flow
- Fast and simple maintenance
- Clear recovery lid for easy inspection and function control
- Ergonomic, adjustable and foldable handle for easy transport and storage
- Extremely compact
- Roller bumpers for near to wall cleaning
- Real two tank system
- Patent Elastic Strap System to easily install and remove squeegee blades
- Battery level indicator

SC351 full package

SC351 is offering both forward and backward scrubbing and drying with an impressive brush pressure of 27 kg. Easy to see how useful this feature is for cleaning in crowded places, between and behind tables, shelves, furniture and in other less accessible areas.



Voltage (V)	12
Rated power (W)	450
Sound pressure level at 1.5 m (dB(A) ISO 3744)	64
Productivity theoretical/actual (m²/h)	1480/890
Scrubbing width (mm)	370
Solution/recovery tank (I)	11/11
Brush/pad diameter (mm)	370/355
Brush quantity and type	1 Disc
Brush speed (RPM)	140
Brush pressure (kg)	27
Length x width x height (mm)	730x475x450
Squeegee width (mm)	470
Gross weight (gvw) (kg)	73
FEATURES	
Built-in charger	•
Automatic brush shut off	•
Automatic solution shut off	•
Battery version	•
Roller bumpers on squeegee	•
Battery level indicator	•
Squeegee	•
STANDARD EQUIPMENT	
BRUSH DISC 370MM 14.5 PROLENE BLUE	909999000
BRUSH DISC 370MM 14.5 PROLENE BLUE BLADES SQUEEGEE 370MM 14.5 PU KIT	9099999000 9100000077
BLADES SQUEEGEE 370MM 14.5 PU KIT	9100000077

### SC401 - Small scrubber/dryers







# Speed up your floor cleaning – with a compact and productive scrubber dryer

- Compact design and easy to maneuver
- Productive and powerful vacuum motor ensures a perfect cleaning and drying result
- Brush click on/off, and light weight squeegee with no hose connection
- Patented elastic strap system makes squeegee maintenance easy and simple
- Detergent mixing system will prevent overdosing of chemicals – saving the environment and the total cost of cleaning
- Ergonomic handle with touchpoints, OneTouch™ button and instruction stickers makes the machine simple for the operator to get started
- The Nilfisk SilentTech™ technology reduces the sound level from 65dB(A) – and down to 60dB(A) in silent mode

The compact and highly maneuverable SC401 walk-behind scrubber dryer offers all the speed, accuracy and ease-of-use you need for better cleaning of floors. To make things complete this high-performance machine has an extremely low sound level to enable daytime cleaning – even in sound sensitive areas.



TECHNICAL DATA	SC401 43 B	SC401 43 BD	SC401 43 BD FULL PKG	SC401 43 B FULL PKG	SC401 43 E
Voltage (V)	24	24	24	24	230
Productivity theoretical/actual (m²/h)	1720/1032	2150/1290	2150/1290	1720/1032	1720/860
Solution/recovery tank (I)	30/30	30/30	30/30	30/30	30/30
Brush/pad diameter (mm)	430/430	430/430	430/430	430/430	430/430
Brush quantity and type	1 disc	1 disc	1 disc	1 disc	1 disc
Brush speed (RPM)	140	140	140	140	170
Brush pressure (kg)	24	24	24	24	30
Length x width x height (mm)	1180x458x1055	1180x458x1055	1180x458x1055	1180x458x1055	1180x458x1055
Squeegee width (mm)	720	720	720	720	720
Gross weight (gvw) (kg)	151	166	166	151	144
FEATURES					
Battery model	•	•	•	•	
Cable model					•
Drive version		•		•	
One-Touch Button	•	•	•	•	•
Brush click-on/off	•	•	•	•	
Nilfisk SilenTech™ and Silent Mode	•	•	•	•	
Squeezable drain hose with flow control	•	•	•	•	•
Debris tray	•	•	•	•	•
Filling hose	•	•	•	•	•
Detergent Mixing System			•	•	
STANDARD EQUIPMENT					
HOSE FILLING	9097290000	9097290000	9097290000	9097290000	9097290000
CABLE EXTENSION EU PLUG L.2000MM SIP			9100000787	9100000787	
DETERGENT SOLUTION SYSTEM KIT			9100002531	9100002531	
HOSE QUICK CONNECTION	9100002572	9100002572	9100002572	9100002572	9100002572
METER HOUR 24V KIT		9100002257	9100002257	9100002257	
PAD HOLDER FLAT 17 432MM			9100002050	9100002050	
BRUSH DISC 430MM 17 PROLENE BLUE			L08812891	L08812891	L08812891
BLADE SQUEEGEE 700MM 28 GUM KIT	9100002541	9100002541	9100002541	9100002541	9100002541
BATT. 12V-76AH GEL MONOBLOC			80564310	80564310	
CHARGER BATT O/B 24V 10A 100-240V EU KIT			9100002545	9100002545	
ITEM NO.	9087391020	9087393020	9087398020	9087390020	9087392020

### SC430 – Medium scrubber/dryers







### Simple and user friendly walk-behind scrubber dryer

- Easy to use with one touch button that activate all scrubbing functions
- Integrated solution tank and recovery tank for high capacity
- Compatible with all Nilfisk accessories
- Excellent water pick-up

The SC430 is the perfect choice for simple and reliable daily cleaning of indoor mid-sized areas. With a reduced pushing force and a user friendly design the SC430 is intuitive to use.



TECHNICAL DATA	SC430 53 B GO FULL PKG
Voltage (V)	24
Rated power (W)	900
Sound pressure level at 1.5 m (dB(A) ISO 3744)	70±3
Productivity theoretical/actual (m²/h)	2120/1272
Scrubbing width (mm)	530
Solution/recovery tank (I)	40/40
Brush/pad diameter (mm)	530/508
Brush speed (RPM)	150
Brush pressure (kg)	35
Max. speed (km/h)	4
Length x width x height (mm)	
Squeegee width (mm)	760
Gross weight (gvw) (kg)	175
FEATURES	
Blades can be used on 4 edges	•
Battery level indicator	•
Water level indicator	•
Ergonomic handle with two safety switches	•
Quick change system for squeegee blades	•
Squeezable drain hose with flow control	•
Delivered ready to use (full package)	•
STANDARD EQUIPMENT	
BRUSH DISC 530MM 21 PROLENE BLUE	L08837025
BLADES SQUEE. 740MM 29 GUM RUBBER KIT	9100000279
BATT.12V-87AH AGM MONOBLOC	1464853000
CHARGER 100-240V OBC 24V 9A	VF90297
ITEM NO.	50000334

### SC450 - Medium scrubber/dryers







# Simple, basic scrubber dryer that makes your cleaning an easy operation

- The low noise level enables daytime cleaning for increased comfort and efficiency
- Polyethylene corrosion proof rotomolded tank ensures durability
- Automatic squeegee release when hitting obstacles provides reliable use and extended lifetime of equipment
- Large recovery tank and removable lid for easy cleaning
- Fast and hygienic
- Most electrical components are placed in dedicated waterproof box for reliability and safety

In line with the century old Nilfisk tradition, SC450 combines performance, reliability, productivity and ease of use in a well designed and cost efficient all round scrubber/dryer.



TECHNICAL DATA	SC450 B	SC450 E	
Rated power (W)	810	1650	
Sound pressure level at 1.5 m (dB(A) ISO 3744)	68	70	
Productivity theoretical/actual (m²/h)	2120/1272	2120/1060	
Scrubbing width (mm)	530	530	
Solution/recovery tank (I)	40/45	40/45	
Brush/pad diameter (mm)	530/508	530/508	
Brush quantity and type	1 Disc	1 Disc	
Brush speed (RPM)	154	150	
Brush pressure (kg)	34	34	
Length x width x height (mm)	1174x760x980	1174x760x980	
Squeegee width (mm)	760	760	
Gross weight (gvw) (kg)	190	135	
FEATURES			
Cable version		•	
Battery version	•		
Blades can be used on 4 edges	•	•	
Battery level indicator	•		
Ergonomic handle with two safety switches	•	•	
Squeezable drain hose	•	•	
Squeegee	•	•	
STANDARD EQUIPMENT			
BLADES SQUEE. 740MM 29 GUM RUBBER KIT	9100000279	9100000279	
ITEM NO.	9087370020	9087372020	

### SC500 - Medium scrubber/dryers







# Carefully designed to improve productivity and drive down your cleaning cost

- Ideal for daytime cleaning: Nilfisk SilenTechTM technology keeps extreme low sound level in all conditions
- SmartFlow™: solution flow of detergent/water automatically controlled by speed to have consistent cleaning and reduced consumptions
- Ease-of-use: Ergonomic drive paddle and informative display with OneTouch™ button and easy click on/off for the brush/padholder.
- SmartKey™ system with Separate Supervisor and Operator keySettings effectively controlled
- Easy handling: Plastic light squeegee with patent elastic strap system
- Sustainable: Ecoflex<sup>™</sup> system with flexible detergent setting and water-only cleaning
- Effective: 53cm scrubbing width and automatic brush speed control to save energy
- User friendly: Electric motor to lower/raise brush deck with OneTouch™ button
- Productive: 45/45 liter water tanks and up to 5 hours of running time in light applications
- SC500 REV™ version orbital scrubbing technology quickly and efficiently attacks dirt from multiple directions leaving the floor cleaner in a single pass"

The Nilfisk SC500 walk-behind scrubber dryer is carefully designed to improve productivity and drive down your total cleaning costs. These significant benefits are achieved through more ease-of-use and a series of technical features enabling daytime cleaning and the most effective use of water and detergent. A reliable choice for cleaning companies, hospitals, schools, offices, supermarkets, shops, sports centers, restaurants, hotels, and production floors.



TECHNICAL DATA	SC500 53 B	SC500 53 B Full PKG	SC500 53R B	SC500 53D LITHIUM-ION BR / SC500 53D LITHIUM-ION X BR	SC500 53R LITHIUM-ION X / SC500 53RD LITHIUM-ION
Voltage (V)	24	24	24	24	24
Rated power (W)	930	930	930	930	930
Sound pressure level (dB(A) BS 5415)	63 (60) ±3	63 (60) ±3	65 (63) ±3	63 (60) ±3	65 (63) ±3
Productivity theoretical/actual (m²/h)	2650/1590	2650/1590	2550/1530	2650/1590	2550/1530
Scrubbing width (mm)	530	530	508	530	508
Solution/recovery tank (I)	45/45	45/45	45/45	45/45	45/45
Brush/pad diameter (mm)	530/508	530/508	508/508	530/508	508/508
Brush quantity and type	1 Disc	1 Disc	1 REV	1 Disc	1 REV
Brush speed (RPM)	155	155	0-30	155	0-30
Brush pressure (kg)	15/30	15/30	22/30	15/30	22/30
Max. speed (km/h)	5	5	5	5	5
Length x width x height (mm)	1277x720x1063	1277x720x1063	1277x720x1063	1277x720x1063	1277x720x1063
Squeegee width (mm)	720	720	720	720	720
Gross weight (gvw) (kg)	207	207	210	184.4	183
FEATURES					
Click on-off brush	•	•		•	
Ecoflex prepared	•	•	•	•	•
Delivered ready to use (full package)		•		•	
SmartKey system	•	•	•	•	•
Squeegee	•	•	•	•	•
SmartFlow system	•	•	•	•	•
Nilfisk SilenTech™	•	•	•	•	•
Lithioum ion battery				•	•
STANDARD EQUIPMENT					
HOSE FILLING SIP	9100000703	9100000703	9100000703	9100000703	9100000703
SMART KEY-SUPERVISOR	56116519	56116519	56116519	56116519	56116519
SMART KEY-USER	56116518	56116518	56116518	56116518	56116518
ECOFLEX DETERGENT KIT SC500		9100002395		9100002395	
BRUSH DISC 530MM 21 PROLENE BLUE		L08837025		L08837025	
BLADES SQUEE. 700MM 28 GUM RUBBER KIT	9100000810	9100000810	9100000810	9100000810	9100000810
BATT. 12V-105AH GEL MONOBLOC		80564400			
LITHIUM ION 24V UPGRADE KIT				9100003110	9100003110
CHARGER BATT. O/B 24V 13A 100-230V KIT		9099995000		9099995000	
ITEM NO.	9087401020	9087400020	9087402020	CM9087401020-09 CM9087401020-10	CM9087402020-02 CM9087402020-03

### SC530 - Medium scrubber/dryers







### Simple, trustworthy and cost effective scrubber dryer

- Easy to use with OneTouch™ button to activates allscrubbing functions
- Tilting recovery tank for easy access to batteries and chemicals
- Ergonomic pedal to easily lift and lower the deck
- Easy click-on and off system releases the brush/pad effortlessly
- Excellent water pick-up

The SC530 is a simple, trustworthy and cost-effective scrubber dryer and the perfect choice for applications such as schools, hospitals, supermarkets and public buildings, as the SC530 allows to cover big areas reducing time and increasing productivity thanks to its 61 liter tank capacity.



TECHNICAL DATA	SC530 53 BD GO	SC530 53 B GO
Voltage (V)	24	24
Rated power (W)	950	800
Sound pressure level at 1.5 m (dB(A) ISO 3744)	69	69
Productivity theoretical/actual (m²/h)	2385/1431	2120/1272
Scrubbing width (mm)	530	530
Solution/recovery tank (I)	61/61	61/61
Brush/pad diameter (mm)	530/508	530/508
Brush speed (RPM)	150	150
Brush pressure (kg)	23	27
Length x width x height (mm)	1260x550x1080	1260x550x1080
Gross weight (gvw) (kg)	233	227
FEATURES		
With traction motor	•	
Blades can be used on 4 edges	•	•
Battery level indicator	•	•
Water level indicator	•	•
Ergonomic handle with two safety switches	•	•
Quick change system for squeegee blades	•	•
Squeezable drain hose with flow control	•	•
STANDARD EQUIPMENT		
BRUSH DISC 530MM 21 PROLENE BLUE	L08837025	L08837025
BLADES SQUEE. 740MM 29 GUM RUBBER KIT	9100000279	9100000279
24V 13A CHARGER KIT AGM WITH HARNESS	VS10267	VS10267
ITEM NO.	50000335	50000336

### BA/CA 551/611 - Medium scrubber/dryers







#### Smarter design lowering your cleaning costs

- Low noise level for daytime cleaning
- OneTouch™ dashboard operation Ecoflex™ option, detergent mixing system
- No-tools for changing squeegee blades
- Easy access to recovery tank for cleaning and maintenance
- Traction version with large wheels for easy handling
- Waterproof electrical control box

The range of walk-behind scrubber dryers offers more of everything that is important for floor cleaning efficiency: more productivity, more running time, more ergonomic features, more reliability, more options and more cost-effectiveness.



TECHNICAL DATA	BA 551C D	BA 611 D
Rated power (W)	1330	1230
Sound pressure level at 1.5 m (dB(A) ISO 3744)	65.8	65.8
Productivity theoretical/actual (m²/h)	2860/1720	3420/2055
Scrubbing width (mm)	510	610
Solution/recovery tank (I)	55/55	55/55
Brush/pad diameter (mm)	-	305/305
Brush quantity and type	2 Cylindrical	2 Disc
Brush speed (RPM)	570	230
Brush pressure (kg)	26	21/28
Max. speed (km/h)	5.6	5.6
Length x width x height (mm)	1320x540x1090	1310x650x1090
Squeegee width (mm)	760	810
Gross weight (gvw) (kg)	258	256
FEATURES		
With traction motor	•	•
Cable version		
Battery version	•	•
Interchangeable brush deck	•	•
Water level indicator	•	•
Ecoflex prepared	•	•
Squeegee	•	•
STANDARD EQUIPMENT		
BLADES SQUEE. 740MM 29 GUM RUBBER KIT	9100000279	
BLADES SQUEE. 830MM 33 GUM RUBBER KIT		9100000280
CHARGER BATT. O/B 24V 13A 100-230V KIT	909 6739 000	909 6739 000
ITEM NO.	908 7158 020	908 7159 020

### BA651/751/851 – Large scrubber/dryers







#### Boost your productivity in large area cleaning

- Ecoflex™ option, detergent mixing system
- Extremely low noise level (down to 58 dB(A)) for daytime cleaning
- Combination of 86 cm scrubbing width, and large capacity tanks provide high productivity
- Robust construction, state of the art design and better materials offer more reliability and longer working life
- Interchangeable brush decks allow a choice of 3 different disc sizes or 71 cm cylindrical

The BA651/751/851 series represents a real innovation in the world of scrubber dryers and a concrete added value for cleaning professionals. Now all the machines are equipped with Ecoflex™ system, which keeps the consumption control, but it also guarantees the possibility to boost temporarily water, detergent and brush pressure for all the more aggressive cleaning



TECHNICAL DATA	BA 651	BA 751	BA 751C	BA 851
Voltage (V)	24	24	24	24
Rated power (W)	1420	1420	1820	1420
Sound pressure level at 1.5 m (dB(A) ISO 3744)	58	58	58	58
Productivity theoretical/actual (m²/h)	3700/2200	3980/2390	3980/2390	4820/2895
Scrubbing width (mm)	660	710	710	860
Solution/recovery tank (l)	85/85	85/85	85/85	85/85
Brush/pad diameter (mm)	330/330	370/355	-	430/432
Brush quantity and type	2 Disc	2 Disc	2 Cylindrical	2 Disc
Brush speed (RPM)	220	220	613	220
Brush pressure (kg)	32/52	32/52	35	32/52
Max. speed (km/h)	5.6	5.6	5.6	5.6
Length x width x height (mm)	1500x600x1050	1500x600x1050	1470x600x1050	1570x600x1050
Squeegee width (mm)	890	890	890	1040
Gross weight (gvw) (kg)	470	470	470	470
FEATURES				
Disc brush version	•	•		•
Hopper for collecting debris			•	
Adjustable handle	•	•	•	•
Click on-off brush	•	•		•
Water level indicator	•	•	•	•
Ecoflex prepared	•	•	•	•
Squeegee				
STANDARD EQUIPMENT				
BLADES SQUEE. 890MM 35 GUM RUBBER KIT	9100000281	9100000281	9100000281	
BLADES SQUEE. 1040MM 41 GUM RUBBER KIT				9100000282
SPLASH GUARD DECK 650MM/26	909 5224 000			
SPLASH GUARD DECK 750MM/30		909 5345 000		
ITEM NO.	9087240020	9087243020	9087246020	9087247020

### SC800 – Large scrubber/dryers







#### Giving you superb results in heavy-duty cleaning

- Powerful brush and vac motors, high down pressure (up to 77 kg), outstanding cleaning and drying performance: the best answer for heavy duty "industrial "task
- Green oriented: complete consumption control: Ecoflex™ system, low noise level (only 61dB(A))
- Large 95 litre solution and recovery tanks give extra capacity for longer working time
- The scrub deck is protected with removable covers that prevent damage to walls and doors, while providing easy access for maintenance
- Right industrial shape in compact dimensions.
   No compromise on the ergonomic level and maneuverability

SC800 is designed for maximum performance, easy handling, low maintenance, superb cleaning results and yet it is an eco-friendly solution.



TECHNICAL DATA	SC800-71	SC800-71C	SC800-86
Voltage (V)	24	24	24
Rated power (W)	1890	1910	1890
Sound pressure level at 1.5 m (dB(A) ISO 3744)	61	61	61
Productivity theoretical/actual (m²/h)	4120/2470	4120/2470	4990/2990
Scrubbing width (mm)	710	710	860
Solution/recovery tank (l)	95/95	95/95	95/95
Brush/pad diameter (mm)	355/355	-	430/432
Brush quantity and type	2 Disc	2 Cylindrical	2 Disc
Brush speed (RPM)	270	840	270
Brush pressure (kg)	36/77	36	36/77
Max. speed (km/h)	5.8	5.8	5.8
Length x width x height (mm)	1480x780x1130	1480x780x1130	1480x780x1130
Squeegee width (mm)	910	910	1050
Gross weight (gvw) (kg)	487	492	488
FEATURES			
Disc brush version	•		•
Front and rear bumpers	•	•	•
Cylindrical brush version		•	
Interchangeable brush deck	•	•	•
Adjustable brush pressure	•		•
Ecoflex prepared	•	•	•
Squeegee	•	•	•
STANDARD EQUIPMENT			
KIT-REFILLING HOSE	56112355	56112355	56112355
BLADE KIT-SQUEEGEE GUM	56112330		
BLADE KIT-SQUEEGEE LINATEX		56112331	
ITEM NO.	56112034	56112036	56112035

### SC1500 - Stand on Scrubber/Dryers







#### Innovative stand-on scrubber dryer setting a new STANDard

- Easy handling. Just step up and go OneTouch™ scrub ON/OFF switch and two brush pressure settings for securing high cleaning performance
- Intuitive dashboard with user-friendly menu for setting parameters for cleaning conditions and floor type
- 44 liter tank with electronic controlled water flow allows cleaning up to 75 minutes per tank
- Low noise level and a silent mode option, makes it ideal for sound sensitive areas and daytime cleaning
- Up to 3.5 hours battery running time and optional on board charger increase productivity, performance and reliability
- Ecoflex™ detergent mixing system(optional)

SC1500 is an innovative stand-on scrubber dryer providing you with superior efficiency due to unprecedented ease of use, increased performance, high quality and reliability. It is an investment in Nilfisk quality that will pay off year after year.



TECHNICAL DATA	SC1500
Voltage (V)	24
Rated power (W)	840
Productivity theoretical/actual (m²/h)	2142/1499
Scrubbing width (mm)	510
Solution/recovery tank (I)	44/46
Brush quantity and type	1 Disc
Brush speed (RPM)	140
Brush pressure (kg)	23/40
Max. speed (km/h)	Fwd 4.8/Rev. 3.5
Length x width x height (mm)	1230x610x1330
Squeegee width (mm)	680
Gross weight (gvw) (kg)	326
FEATURES	
Battery version	•
One-Touch™ control panel	•
Debris tray	•
Ecoflex prepared	•
Squeegee	•
STANDARD EQUIPMENT	
DEBRIS CAGE KIT	56104360
KIT-REFILLING HOSE	56112355
SQUEEGEE KIT-BLADE-LINATEX	56104483
SKIRT BRUSH	56104240
ITEM NO.	56104002

### SC2000 - Ride-on scrubber/dryers







# Micro ride-on scrubber dryer doubles cleaning output at price of walk-behind model

- Productive: 53 cm scrubbing width, high speed (6 km/h), 70/70 L
- Compact and comfortable: very compact dimensions for narrow areas, comfortable seat and wide space for operator's legs
- SmartFlow™: solution flow of detergent/water automatically controlled by speed to have consistent cleaning and reduced consumptions
- Ideal for daytime cleaning: Nilfisk SilenTech™ technology keeps extreme low sound level in all conditions
- SmartKey™ system with Separate Supervisor and Operator keySettings effectively controlled
- Easy to control: Dashboard with OneTouch™ button; intuitive display integrated in the steering wheel
- Water filling system automatically shutoff water when the tank is full
- USB port as option
- Easy handling: Automatic brush click on/off and plastic light squeegee with patent elastic strap system
- Sustainable: Ecoflex™ system with flexible detergent setting and water-only cleaning. Selfadjusting brush speed according to floor type and application to save energy consumptions

The Nilfisk SC2000 mini ride-on scrubber dryer eases the working effort significantly compared a walkbehind machine. An attractive choice for cleaning of offices, supermarkets, sports centers, shops, restaurants, hotels, and institutions like hospitals and schools.

Taking working speed up to 6 km/h – from an average 4 km/h with a walk-behind scrubber dryer – the SC2000 has a great impact on both productivity and cleaning costs.



TECHNICAL DATA	SC2000 53B	SC2000 53B Full PKG	SC2000 LITHIUM-ION X BR	SC2000 LITHIUM-ION BR
Voltage (V)	24	24	24	24
Productivity theoretical/actual (m²/h)	3180/2230	3180/2230	3180/2230	3180/2230
Solution/recovery tank (I)	70/70	70/70	70/70	70/70
Brush/pad diameter (mm)	530/508	530/508	530/508	530/508
Brush quantity and type	1 Disc	1 Disc	1 Disc	1 Disc
Brush speed (RPM)	155	155	155	155
Brush pressure (kg)	15/30	15/30	15/30	15/30
Max. speed (km/h)	6	6	6	6
Length x width x height (mm)	1270x550x1020	1270x550x1020	1270x550x1020	1270x550x1020
Squeegee width (mm)	720	720	720	720
Gross weight (gvw) (kg)	342	342	297	297
FEATURES				
Automatic squeegee lift in reverse	•	•	•	•
Click on-off brush	•	•	•	•
Ecoflex prepared	•	•	•	•
SmartKey system	•	•	•	•
Squeegee	•	•	•	•
SmartFlow system	•	•	•	•
Nilfisk SilenTech™	•	•	•	•
Lithium ion battery			•	•
STANDARD EQUIPMENT				
FILLING HOSE	9100000952	9100000952	9100000952	9100000952
SMART KEY-SUPERVISOR	56116519	56116519	56116519	56116519
SMART KEY-USER	56116518	56116518	56116518	56116518
ECOFLEX DETERGENT KIT SC2000		9100002389	9100002389	
BRUSH DISC 530MM 21 PROLENE BLUE		L08837025	L08837025	
BLADES SQUEEGEE 700MM 28 PU KIT	9100000490	9100000490	9100000490	9100000490
BATT. 12V-105AH GEL MONOBLOC		80564400	80564400	
CHARGER BATT. O/B 24V 100-230V EU KIT		9100000940		
LITHIUM ION 24V UPGRADE KIT			9100003110	9100003110
ITEM NO.	9087410020	9087411020	CM9087410020-08	CM9087410020-09

### BR652/752 - Ride-on scrubber/dryers







#### Revolutionary deck system giving you superb performance

- Sliding deck concept; maximum comfort and performance, minimum efforts and maintenance
- Squeegee concept; a stable and reliable squeegee for the best pick up performance
- Ecoflex™ system minimises the environmental impact without compromising performance
- Ergonomic steering wheel concept with all working functions fully integrated
- Patented automatic speed control that significantly increases operator safety
- Super compact design makes cleaning of restricted space areas fast and easy
- Low noise mode makes daytime cleaning and cleaning of noise sensitive areas viable

With the BR652/752 series everything can be done just moving the steering wheel; as the machine turns, so too does the deck. Together with the "intelligent" squeegee – which perfectly covers the scrubbing track without leaving traces – the Nilfisk concept delivers superb cleaning performance.

This solution is so efficient that side skirts are no longer needed.



TECHNICAL DATA	BR652	BR752
Voltage (V)	24	24
Rated power (W)	1500	1500
Sound pressure level at 1.5 m (dB(A) ISO 3744)	60 (57)	60 (57)
Productivity theoretical/actual (m²/h)	3960/2770	4260/2980
Scrubbing width (mm)	660	710
Solution/recovery tank (l)	80/80	80/80
Brush/pad diameter (mm)	330/330	370/355
Brush quantity and type	2 Disc	2 Disc
Brush speed (RPM)	230	230
Brush pressure (kg)	30/48	32/50
Max. speed (km/h)	6	6
Length x width x height (mm)	1360x670x1200	1360x750x1200
Squeegee width (mm)	890	890
Gross weight (gvw) (kg)	446	448
FEATURES		
Back up warning alarm	•	•
Ecoflex prepared	•	•
Automatic speed control system	•	•
Sliding deck system (no side skirt)	•	•
Antishock retractable deck	•	•
Solution tank with easy drain system	•	•
Squeegee	•	•
STANDARD EQUIPMENT		
TRAY DEBRIS KIT	9098712000	9098712000
BLADES SQUEEGEE 890MM 35 PU KIT	9099855000	9099855000
SPLASH GUARD DECK 650MM/26	909 5224 000	
SPLASH GUARD DECK 750MM/30		909 5345 000
ITEM NO.	9087260020	9087262020

### SC3500 - Ride-on scrubber/dryers







### The mid-size solution for high productivity and efficiency

- High productivity for value; cleans large spaces with optimal efficiency
- Better results; improved brush pressure and quicker drying time
- Fast, convenient, and ergonomic; automatic management of brush/squeegee
- Improved maneuverability and transport thanks to squeegee control

If you need big indoor performance from a more space-efficient scrubber dryer, the ride-on SC3500 is your ideal solution. With improvements to productivity, maneuverability, and ergonomics, this versatile addition to the Nilfisk GO-Line can handle massive commercial, educational, or industrial environments with ease.



TECHNICAL DATA	SC3500 GO	SC3500 GO FULL PKG 2	SC3500 GO FULL PKG 3	SC3500 GO OBC
Voltage (V)	24	24	24	24
Rated power (W)	2658	2658	2658	2658
Sound pressure level at 1.5 m (dB(A) ISO 3744)	69	69	69	69
Productivity theoretical/actual (m²/h)	4260/2980	4260/2980	4260/2980	4260/2980
Scrubbing width (mm)	710	710	710	710
Solution/recovery tank (I)	110/110	110/110	110/110	110/110
Brush/pad diameter (mm)	355/355	355/355	355/355	355/355
Brush quantity and type	2 disc	2 disc	2 disc	2 disc
Brush speed (RPM)	180	180	180	180
Brush pressure (kg)	30/50	30/50	30/50	30/50
Length x width x height (mm)	1620x760x1250	1620x760x1250	1620x760x1250	1620x760x1250
Gross weight (gvw) (kg)	545	545	545	545
FEATURES				
Automatic squeegee lift in reverse	•	•	•	•
Solution level indicator	•	•	•	•
Blades can be used on 4 edges	•	•	•	•
Click on-off brush	•	•	•	•
One-Touch™ control panel	•	•	•	•
Water level indicator	•	•	•	•
Battery indicator	•	•	•	•
STANDARD EQUIPMENT				
TRAY DEBRIS KIT	9100000795	9100000795	9100000795	9100000795
DISC BRUSH-14 PROLITE 3 LUG	56505805	56505805	56505805	56505805
BLADE KIT-SQUEEGEE-GUM 34	56382738	56382738	56382738	56382738
BATT.6V-222AH AGM MONOBLOC		80566222		
KIT CHARGER	VR31052	VR31052	VR31052	VR31052
BATT. 6V-180AH GEL MONOBLOC				80564000
BATT. 6V-200AH WET TUBULAR MONOBLOC			80563200	
BATTERY TRAY			VR10048	
ITEM NO.	50000557	CM50000557-02	CM50000557-03	CM50000557-01

### BR755/755C/855 - Ride-on scrubber/dryers







#### Better ergonomics, better reliability, better cleaning

- Ecoflex™ prepared: green, flexible, nice and easy
- User friendly, waterproof OneTouch™ control panel and easy to operate
- High manoeuvrability allows cleaning in congested
   areas.
- Adjustable scrubbing pressure ensure a wide range of cleaning application from daily scrubbing to restoration
- Integrated vacuum motor with low noise level for daytime cleaning applications
- Operator's easy access from left and right side
- Large battery compartment enables a 400Ah battery tray for more than 4.5 hours running time

BR755/755C/855 is the generation of scrubber dryers, with focus on performance, ergonomics and reliability.



TECHNICAL DATA	BR755	BR755C	BR855
Voltage (V)	24	24	24
Rated power (W)	2040	1920	2160
Sound pressure level at 1.5 m (dB(A) ISO 3744)	63.7	63.7	63.7
Productivity theoretical/actual (m²/h)	4470/3130	4470/3130	5360/3750
Scrubbing width (mm)	710	710	860
Solution/recovery tank (I)	106/106	106/106	106/106
Brush/pad diameter (mm)	355/355	-	430/432
Brush quantity and type	2 Disc	2 Cylindrical	2 Disc
Brush speed (RPM)	250	900	250
Brush pressure (kg)	40/65/96	27/36/45	40/65/96
Max. speed (km/h)	6.3	6.3	6.3
Length x width x height (mm)	1520x770x1310	1520x800x1310	1520x920x1310
Gross weight (gvw) (kg)	658	658	658
FEATURES			
Adjustable steering and seat	•	•	•
Back up warning alarm	•	•	•
One-Touch™ control panel	•	•	•
Polyurethane front & rear wheels	•	•	•
Fully external suction hose	•	•	•
Ecoflex prepared	•	•	•
Squeegee	•	•	•
STANDARD EQUIPMENT			
KIT SIDE SKIRT		56316194	
SKIRT BLADE KIT-GUM	56383488		56383488
BLADE KIT-SQUEEGEE-GUM 34			56382738
BLADE KIT-SQUEEGEE-GUM 28	56382734	56382734	
ITEM NO.	56601014	56601016	56601015

### SC5000 - Ride-on scrubber/dryers







### Faster, smarter, easier floorcare

- Best-in-class turning radius in a profile narrow enough for any corner or aisle
- SmartFlowTM adjusts detergent and water pressure according to speed
- Sealed cylindrical brush protects moving parts for up to 4x greater lifespan
- SmartKey and SupervisorKey settings for user- and environment-specific performance customization
- Maximum operator safety and productivity with clear sightlines and full functionality control via steering wheel

A compact, highly maneuverable scrubber that combines intuitive operation, exemplary performance, and leading resource-efficient technologies into a single package, the SC5000 allows operators to clean in spaces both large and small without disrupting business.



TECHNICAL DATA	SC5000 810C PKG	SC5000 860D PKG	SC5000 910C PKG
Voltage (V)	36	36	36
Sound pressure level at 1.5 m (dB(A) ISO 3744)	63	61	63
Min. aisle turn (cm)	168	168	168
Scrubbing width (mm)	80.3	84.3	90.5
Solution/recovery tank (l)	140/147	140/147	140/147
Brush/pad diameter (mm)	-	43.2	-
Brush quantity and type	2 Cylindrical	2 Disc	2 Cylindrical
Brush speed (RPM)	776.5	250	776.5
Max. speed (km/h)	8	8	8
Length x width x height (mm)	1590x950x1460	1590x950x1460	1590x1050x1460
Gross weight (gvw) (kg)	850	848	855
FEATURES			
Adjustable steering and seat	•	•	•
Back up warning alarm	•	•	•
Click on-off brush		•	
SmartKey system	•	•	•
One-Touch™ Button	•	•	•
SmartFlow system	•	•	•
Speed limiter	•	•	•
STANDARD EQUIPMENT			
SQUEEGEE BLADE KIT-LINATEX J	56116704	56116704	56116704
SIDE BLADE KIT-LINATEX		56116706	
SMART KEY-SUPERVISOR	56116519	56116519	56116519
SMART KEY-USER	56116518	56116518	56116518
ITEM NO.	56117807	56117805	56117808

### SC6000 - Ride-on scrubber/dryers







#### Efficient large area cleaning

- Intermittent SmartFlow™ lever integrated into steering wheel: Reduces water flow on the deck, preventing splashes during turns
- Speed limiter function reduces operator fatigue during cleaning especially when navigating around obstacles
- Available in 3 different versions: 86 cm or 105 cm dual discs deck or 91 cm dual cylindrical brushes deck
- Consistent cleaning: Designed for different types of surfaces, from smooth to tiles floors
- Best in class drying performance thanks to the optional dual turbine
- Reliable and rugged construction in compact dimensions
- Fully protected scrub deck and side skirts using rugged steel doors with rollers to minimize the risk of machine or facility damage
- SmartKey<sup>™</sup> system with two different levels of access, (super user and user keys)
- OLED display visible in even bright light conditions and from all viewing angles
- No tools are needed to replace/change or inspect the main components of the machine: Brushes, squeegee and blades
- Click-on disc scrub brush system for simple onetouch installation of brushes or pad holders

The Nilfisk SC6000 is a next generation ride-on scrubber dryer with the size, speed, and technology to clean large indoor areas – at an extremely low Total Cost of Ownership.

Available in 3 different versions, SC6000 will be the ideal solution for many companies, industries, and cleaning contractors dealing with large indoor areas such as production sites, warehouses, supermarkets, airports, parking garages and other logistical centers.



TECHNICAL DATA	SC6000 1050D	SC6000 860D	SC6000 910C
Voltage (V)	36	36	36
Rated power (W)	2700	2500	2700
Sound pressure level at 1.5 m (dB(A) ISO 3744)	69	69	69
Productivity theoretical/actual (m²/h)	9450/6620	7740/5420	8190/5730
Scrubbing width (mm)	1016	863	914
Solution/recovery tank (I)	190/190	190/190	190/190
Brush/pad diameter (mm)	508	430	180
Brush quantity and type	2 Disc	2 Disc	2 Cylindrical
Brush speed (RPM)	250	250	760
Brush pressure (kg)	up to 135	up to 135	up to 90
Length x width x height (mm)	1780x1170x1580	1780x990x1580	1780x1170x1580
Squeegee width (mm)	1230	1090	1230
Gross weight (gvw) (kg)	1070	1070	1075
FEATURES			
Diagnostic system	•	•	•
Click on-off brush	•	•	
Debris tray	•	•	•
Ecoflex prepared	•	•	•
SmartKey system	•	•	•
Speed limiter	•	•	•
TrackClean ready	•	•	•
STANDARD EQUIPMENT			
ARM REST KIT-R/H ONLY	56383189	56383189	56383189
BACK-UP ALARM KIT	56116351	56116351	56116351
BEACON KIT	56116352	56116352	56116352
SEAT KIT-STANDARD	56116600	56116600	56116600
SMART KEY-SUPERVISOR	56116519	56116519	56116519
SMART KEY-USER	56116518	56116518	56116518
SQUEEGEE BLADE KIT-LINATEX J		56116704	
SQUEEGEE BLADE KIT- LINATEX K	56116705		56116705
SIDE BLADE KIT-LINATEX	56116706	56116706	56116706
ITEM NO.	56116004	56116005	56116003

### SC6500 - Ride-on scrubber/dryers







#### Your reliable choice for large area cleaning

- Scrubbing width of up to 1300 mm ensuring high productivity
- Water tank capacity of 265 liters enables the operator to work for 1.5 hours before refilling.
- High brush pressure, and effective drying enabled by a powerful vacuum motor
- AC traction unit reduces the total cost of ownership since the motor is maintenance free and has a highquality gearbox
- Low noise level which enables work in noise sensitive areas and during the night
- OneTouch™ control makes the driving and controlling the SC6500 easy
- Ecoflex™ system is reducing cost by saving water and detergent which is essential when cleaning large areas



and heavy industries.





TECHNICAL DATA	SC6500 1100C	SC6500 1100D	SC6500 1300C	SC6500 1300D
Voltage (V)	36	36	36	36
Productivity theoretical/actual (m²/h)	9000/6300	9000/6300	11700/8190	11700/8190
Scrubbing width (mm)	1000	1000	1300	1300
Solution/recovery tank (I)	265/265	265/265	265/265	265/265
Brush/pad diameter (mm)	-	510/508	-	430/432
Brush quantity and type	2 Cylindrical	2 Disc	2 Cylindrical	3 Disc
Brush speed (RPM)	630	240	630	225
Brush pressure (kg)	38/54/90	43/90/145	38/54/90	43/90/145
Max. speed (km/h)	9	9	9	9
Length x width x height (mm)	1870x1210x1480	1870x1080x1480	1870x1410x1480	1870x1330x1480
Gross weight (gvw) (kg)	1508	1460	1547	1506
FEATURES				
Back up warning alarm	•	•	•	•
Blades can be used on 4 edges	•	•	•	•
Disc deck		•		•
Cylindrical deck	•		•	
Ecoflex prepared	•	•	•	•
Break-away squeegee clips	•	•	•	•
Squeegee	•	•	•	•
STANDARD EQUIPMENT				
SIDE BROOM	56413056		56413056	
LEFT SIDE BROOM ASSEMBLY	56413039		56413039	
RIGHT SIDE BROOM ASSEMBLY	56413040		56413040	
BLADE KIT-DISC LINATEX				56413770
BLADE KIT-DISC LINATEX 40		56413768		
SKIRT-BLADE-SIDE-LINATEX	56413654		56413654	
BLADE KIT-SQGEE LINATEX F	56413762	56413762		
BLADE KIT-LINATEX SQUEEGEE H			56413766	56413766
ITEM NO.	56414023	56414022	56414025	56414024

### SC8000 - Ride-on scrubber/dryers







#### Ensuring you productive and powerful cleaning with green scope

- The widest counter rotating dual cylindrical scrub deck in its class increasing the effiency.
- Time-saving high volume tanks of 380 litres to enable cleaning of more than 9.200 m<sup>2</sup> without refill.
- Safe and easy operation with One-Touch™ control panel, front steering system and clear-View™ design providing an excellent view of the floor.
- Environmental friendly for both operator and surroundings with DustGuard™ misting system improving the dust free cleaning.
- Kubota powered engine means superior reliability with gear driven valve train.
- Reduced maintenance costs as there is no downtime due to repair of belts or chains on the engine.
- Ecoflex system guiding the user to a greener and more cost-effective cleaning mode, limiting the use of water and detergent.

SC8000 offers a more productive, powerful, and greener solution for scrubbing and wet sweeping of large areas – carried out in the most resource-saving and cost-effective way.





TECHNICAL DATA	SC8000 1300 LPG	SC8000 1600 LPG
Sound pressure level at 1.5 m (dB(A) ISO 3744)	84	84
Productivity theoretical/actual (m²/h)	15860/11100	19760/13830
Scrubbing width (mm)	1220	1520
Solution/recovery tank (I)	380/380	380/380
Brush/pad diameter (mm)	280x1220	280x1220
Brush quantity and type	2 Cylindrical	2 Cylindrical
Brush speed (RPM)	470	470
Brush pressure (kg)	55/110/180	55/110/180
Max. speed (km/h)	13	13
Length x width x height (mm)	2540x1420x1470	2540x1670x1470
Squeegee width (mm)	1520	1520
Gross weight (gvw) (kg)	1730	1834
FEATURES		
Tip out recovery tank	•	•
Automatic squeegee lift in reverse	•	•
Cylindrical deck: 2 brushes	•	•
Misting system	•	
Dual sweep units	•	•
Right scrub unit		•
Squeegee	•	•
STANDARD EQUIPMENT		
BROOM POLY SIDE	56462252	
BACK UP ALARM KIT	56305519	56305519
LEFT SIDE BROOM WITH MISTING K		56111670
KIT WARNING BEACON	56110907	56110907
BLADE KIT MAIN SCRUB-LINATEX	56111206	56111206
BLADE KIT-RT SCRUB-LINATEX		56111635
BLADE KIT-SQGEE-LINATEX-H	56111650	56111650
BLADE-SQGEE-LINATEX-RR-H	56413642	56413642
ITEM NO.	56108124	56108126

#### CS7010 - Ride-on combination








#### Hybrid and ePower combi machines

- ClearView™ sightlines and automatic speed reduction in turns for safer operation
- Tools-free tilt-out/lift-off recovery tank with integrated SmartFlow™
- Available with patented DustGuard™ airborne dust suppression technology
- High-capacity 285 liter front dry sweeper debris hopper with high-lift system
- Standard dual side brooms sweep entire squeegee path to minimize fouling
- Hybrid combination machine. Fuel less consumption, less. High running time on battery variant
- Retractable offset deck and breakaway squeegee.
   Generation fitration system, variable filter shaking
- OneTouch™, MaxAccess, NoTools™. More efficient service, extreme commonality among platforms.
- Hybrid techonolgy and Ecoflex™
- Heated water, High pressure washer



CS7010 reinvents an entire class of equipment by reducing total cost of ownership, including operation, labor and maintenance, while effectively increasing fuel economy and runtime efficiency. Now the most economical solution is also the most ecological.

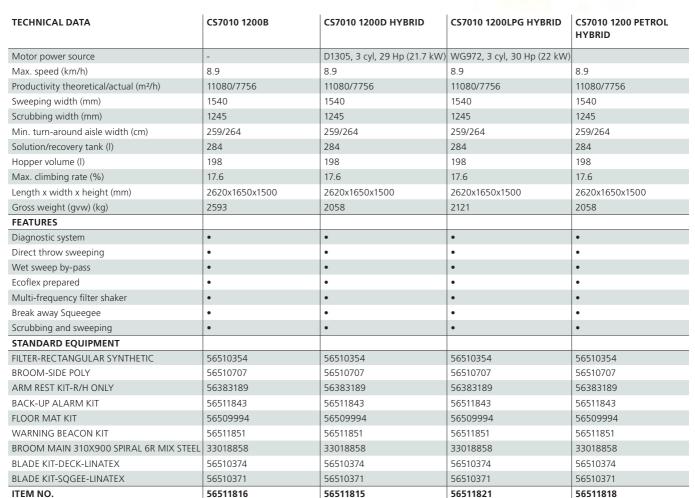

### Overview of accessories



**Cylindrical brush**For uneven floors, such as ceramics anti-slip floors (various models are available)



**Brush**Used on uneven floors when debris collection is not needed (various models are available)



**Pad holder** Used for pads



PADS
Various pads are available
Black & brown: Heavy-duty
Green & blue: Medium-duty
Red: Light-duty



**Splash guard kit**Prevents the water from splashing on to the brush deck. Enables the squeege to recollect all water



**Beacon kit**Used on a ride-on scrubber/
dryer particularly in industry
to warn about the presence
of the machine



**Kit, vacuum motor** Allows squeegee better suction. Particularly useful when 100% recollection of water is needed



**Kit, grammer seat**Better comfort to the operator



**Onboard filling hose**Makes it easy to refill the machine anywhere



**Blades**Various squeegee blade materials are available depending on the application and on the duty; gum, red gum and polyurethane



**Wand kit**Allows the operator to clean difficult to reach areas



On board charger



#### **Ecoflex chemical kit**

Ecoflex allows full control of the detergent to be used, less risk of damaging the floors due to overdosage, flexibility in the detergent selection (available for traction scrubber dryes and combi machines)

### Overview of accessories



Panel filter

The panel filter function is to control the dust in the hopper, it is water resistant as standard



Side broom

The side broom function is to sweep the dirt and debris away from the kerbs, walls, pallets etc. into the path of the main broom




Main broom

The main broom has an effective cleaning action to pick-up debris (industry)



Scrub brush

We provide brushes and pad holders that will give you the best possible cleaning performance



Heated water and high pressure washer options

(CS7000 only) – Improve cleaning recommended especially in efficiency and flexibility



Overhead guard

Protects the operator, industrial application



Cleaning out kit

Allows a better cleaning/access to the recovery tank



Tower bumper kit

Protects the corners of the machine



Charger

Can charge both wet and maintenance free batteries



**Charger plugs** 



High frequency charger

Can charge both wet and maintenance free batteries

The charger comes in different sizes depending on the size of battery for which it is intended



### SW200 / SW250 - Manual sweepers







### Push your cleaning to a new level

- Direct-throw system to ensure excellent sweeping performance
- Capacity for long time cleaning: 38-litre hopper, which can be kept open for disposal of big items, emptying of garbage bins, etc.
- Easy to maneuver: Large non-marking wheels make pushing and steering simple for the user
- Handles dust well: Built-in filter for improved dust control and user comfort
- Solid and suited for outdoor use: Rugged corrosion proof frame
- Virtually service free: Simple mechanical construction with gear and belt drive. No motor or battery
- The handle can be adjusted to fit the operator height (3 positions)
- The hopper remains in place even when the sweeper is stored in an upright position or hung on the wall

Keeping your premises in good and inviting condition for customers and employees has never been easier. The Nilfisk walk-behind sweeper, available in model SW200 and SW250, offers an impressive performance in outdoor spaces as well as indoor floors. Compared to a manual broom, it will pick up and remove dust, dirt, sand, nails, bolts, cigarettes, etc. up to 6 times faster.

TECHNICAL DATA	sw200	SW250
Productivity 1 side broom theoretical/actual (m²/h)	2800/1400	2800/1400
Productivity 2 side brooms theoretical/actual (m²/h)	-	3680/1840
Working width with right side broom (mm)	700	700
Working width with 2 side brooms (mm)	-	920
Hopper volume (I)	38	38
FEATURES		
Two side brooms		•
Adjustable handle	•	•
Soft handle	•	•
Ergonomic handle	•	•
Folding handle	•	•
STANDARD EQUIPMENT		
FILTER	VP11902	VP11902
SIDE BROOM	VP11406	VP11406
MAIN BROOM	VP11211	VP11211
ITEM NO.	50000493	50000494

### SW750 - Walk-behind sweepers







### Quiet and easy cleaning helps you achieve maximum productivity

- Theoretic productivity of 2.880 m2 per hour
- Very low noise level allows sweeping in noise sensitive areas
- Standard delivered with battery and onboard charger.
- Provides up to 2 hours run time on hard floors (approximately 6.000 m2).
- Optional battery increases running time to 3.5 hours
- Main and side brooms are adjustable
- Can be used both in and outdoors, washable polyester filter and filter shaker is standard

This battery powered, truly versatile sweeper can go anywhere and be used for cleaning everything from retail areas to gas stations. With the carpet kit, it can even clean soft floors.



TECHNICAL DATA	SW750	SW750 w/o battery
Motor power source	Battery 12V	Battery 12V
Max. speed (km/h)	4	4
Productivity 1 side broom theoretical/actual (m²/h)	2880/1730	2880/1730
Productivity 2 side brooms theoretical/actual (m <sup>2</sup> /h)	-	-
Working width with right side broom (mm)	720	720
Working width with 2 side brooms (mm)	-	-
Sound pressure level (dB(A))	59	59
Hopper volume (I)	60	60
Max. dumping height (cm)	-	-
Max. climbing rate (%)	20	20
Length x width x height (mm)	998x800x1100	998x800x1100
Operating weight (kg)	68	68
FEATURES		
LED battery meter	•	•
Compact design	•	•
Direct throw sweeping	•	•
Non marking traction wheels	•	•
Adjustable handle	•	•
Manual filter shaker	•	•
STANDARD EQUIPMENT		
FILTER POLYESTER KIT	1463161000	1463161000
BROOM SIDE 109X315 PPL 0.5	146 3035 000	146 3035 000
BROOM MAIN 200X500 CHEVRON 6R PPL 0.7	1463174000	1463174000
BATTERY 12V 49AH AGM MONOBLOC	1464483000	
CHARGER BATT. ON BOARD 12V 6A 100-230V	146 3051 000	146 3051 000
ITEM NO.	908 4701 010	9084708010

### SW900 - Walk-behind sweepers







### SW900 will offer you higher cleaning performance and productivity

- All controls can be overviewed and reached from operator position
- More comfortable to maneuver with ergonomic handlebar
- Easier to adjust speed: Traction lever integrated in handlebar
- The hopper, holding 60 litre, easy to pull off sweeper
- Side broom control on handlebar
- Automatic on/off when side broom is lowered/ raised
- Quicker and more effective cleaning of filter: Electric shaker system

SW900 walk-behind sweeper for both indoor and outdoor use offers dust free removal of dry debris. It will increase your everyday productivity through new valuable benefits: Total control from operator position, improved ergonomics with hopper on wheels, and higher cleaning performance.



TECHNICAL DATA	SW900 B	SW900 P
Motor power source	Battery	Petrol
Max. speed (km/h)	4.5	4.5
Productivity 1 side broom theoretical/actual (m²/h)	3715/2230	3715/2230
Productivity 1 side broom theoretical/actual (m²/h)  Productivity 2 side brooms theoretical/actual (m²/h)	4725/2835	4725/2835
Working width with right side broom (mm)	825	825
Working width with 2 side brooms (mm)	1050	1050
Sound pressure level (dB(A))	70	78
Hopper volume (I)	60	60
Max. climbing rate (%)	20	20
Length x width x height (mm)	1390x870x1100	1390x870x1100
Operating weight (kg)	143	88.5
FEATURES		
Dust collection	•	•
Electrical filter shaker	•	•
Battery version	•	
Battery Meter	•	
Petrol version		•
Wet sweep by-pass	•	•
Onboard charger	•	
STANDARD EQUIPMENT		
FILTER POLYESTER	1464691000	1464691000
BROOM SIDE 109X315 PPL 0.5	146 3035 000	146 3035 000
COUNTER HOUR 24V KIT	9096951000	9096951000
FILTER SHAKER ELECTRIC KIT	1467677000	1467677000
BROOM MAIN 265X600 CHEVR. 6R PPL 0.5-0.8	1465215000	1465215000
CHARGER BATT. ON BOARD 12V 25A SIP	1466519000	
ITEM NO.	9084110010	9084111010

### SR1000S - Ride-on sweepers w/manual dump







#### You get the job done quickly, discreetly and efficiently

- Theoretical productivity rate of 5.500 m2 per hour
- It turns in less than 2 meter, 3 m2 of panel filter, 50
  I of hopper capacity with a climbing ability up to
  16%, and other top performance features
- Top safety features include emergency stop button, hood intralock switch and safety seat switch
- SR1000S can also clean carpet areas, using the optional carpet kit

SR1000S works fast, is very compact and manoeuvrable. Comes in either a battery or petrol version for indoor or outdoor work and is durable to withstand tough working conditions. Recommended for loading bays, station platform or warehouses with narrow aisles.



TECHNICAL DATA	SR1000S B w/left side broom	SR1000S P w/left side broom
Motor power source	Battery 24V	Petrol, 2.2kW/2.9Hp
Max. speed (km/h)	5.5	5.5
Productivity 1 side broom theoretical/actual (m²/h)	-	-
Productivity 2 side brooms theoretical/actual (m²/h)	5500/3850	5500/3850
Working width with right side broom (mm)	-	-
Working width with 2 side brooms (mm)	1000	1000
Sound pressure level (dB(A))	71.6	77
Hopper volume (I)	50	50
Max. dumping height (cm)	-	-
Max. climbing rate (%)	20	20
Length x width x height (mm)	1255x795x1155	1255x795x1155
Operating weight (kg)	224	203
FEATURES		
Flap lifting device	•	•
Adjustable steering and seat	•	•
Electrical filter shaker	•	•
Hopper with wheels and handle	•	•
Key switch	•	•
Parking brake	•	•
Two side brooms	•	•
STANDARD EQUIPMENT		
FILTER PAPER	146 1888 000	146 1888 000
BROOM SIDE 180X350 NYLON	146 0678 000	146 0678 000
BROOM MAIN 265X600 CHEVRON 6R PPL 0.7	146 0748 000	146 0748 000
ITEM NO.	908 4201 010	908 4205 010

### SR1101 - Ride-on sweepers w/manual dump







#### Ensures you economical and productive cleaning

- Battery version offers up to 5 hours of running time
- Climbing rate up to 20%
- A large flap and 70 l of hopper to easy collect dirt and large debris
- 4,3 m2 of filter for an optimal dust control
- Strong polyethylene construction plus steel frame; with robust solutions to avoid sources of malfunctions and minimise service
- Theoretical productivity of 4900 m2 per hour with the optional left side broom
- The standard version is delivered with 1 main broom, 1 right side broom and 1 paper filter

The vast majority of ride-on professional sweeping jobs demand a machine that is compact, manoeuvrable and reliable. SR1101 represents simplicity and robustness in its most sophisticated form. Recommended for factory warehouses, car parks and outside areas such as parks and gardens.



TECHNICAL DATA	SR1101 B	SR1101 P
Motor power source	Battery 24V	Petrol 2.9kW/3.9Hp
Max. speed (km/h)	5	5
Productivity 1 side broom theoretical/actual (m²/h)	4900/3430	4900/3430
Productivity 2 side brooms theoretical/actual (m²/h)	6300/4410	6300/4410
Working width with right side broom (mm)	980	980
Working width with 2 side brooms (mm)	1260	1260
Sound pressure level (dB(A))	63.8	78.3
Hopper volume (I)	70	70
Max. dumping height (cm)	-	-
Max. climbing rate (%)	20	20
Length x width x height (mm)	1480x930x1220	1480x930x1220
Operating weight (kg)	465	392
FEATURES		
Flap lifting device	•	•
Electrical filter shaker	•	•
Back up warning alarm	•	•
Low dump	•	•
Wet sweep by-pass	•	•
Forward & backward pedel	•	•
STANDARD EQUIPMENT		
FILTER PAPER PANEL	1463523000	1463523000
BROOM SIDE 180X400 MIX STEEL	1466140000	1466140000
BROOM MAIN 300X700 CHEVR. 6R PPL 0.5-0.7	145 4879 000	145 4879 000
ITEM NO.	9084310010	9084312010

### SW4000 - Ride-on sweepers w/hydraulic dump







#### One Touch sweeping minimising your operational costs

- One Touch Sweeping makes it easy to operate SW4000 since all functions – main broom, side brooms, vacuum fan and the optional DustGuard are activated and terminated simultaneously
- SW4000 is also gentle to the environment with minimized energy consumption, recyclable materials, dust control and low noise level
- The retractable, spring loaded side brooms, spring away on impacts, which means that they do not break or damage the inventory they touch
- The optional DustGuard™ misting system adds to the dust free sweeping improving the environment for operator as well as the surroundings
- The high hydraulic dump ensures safe handling and fast dumping increasing the high productivity level and reliability of SW4000
- All systems are controlled by the motion pedal, it saves power and broom wear and since all moving parts are run by electric motors they only consume energy when running
- The comfortable operator compartment is easy to access, has adjustable seat and the retractable hopper can be closed from the compartment

SW4000 is a ride-on sweeper with high dump designed for maximum performance, reliability, minimizing downtime and your operational costs. It is the obvious choice for industry and manufacturing, warehouses, distribution centers, school yards, shopping malls, parking lots, sport centers, recycling facilities, multistorey car parks and more. It is equally suitable for outdoors as indoors cleaning depending on selected power source, battery, LPG or petrol (only outdoors).



TECHNICAL DATA	SW4000 B	SW4000 P
Motor power source	Battery 24V	Petrol Honda 4.1 kW
Max. speed (km/h)	7	7
Productivity 1 side broom theoretical/actual (m²/h)	6825/4780	6825/4780
Productivity 2 side brooms theoretical/actual (m²/h)	8750/6125	8750/6125
Working width with right side broom (mm)	975	975
Working width with 2 side brooms (mm)	1250	1250
Sound pressure level (dB(A))	65	75
Hopper volume (I)	75	75
Max. dumping height (cm)	150	150
Max. climbing rate (%)	20	20
Length x width x height (mm)	1640x1035x1330	1640x1035x1330
Operating weight (kg)	824	594
FEATURES		
Flap lifting device	•	•
Electrical filter shaker	•	•
Hour Meter	•	•
Battery Meter	•	
Variable high dump system	•	•
Wet sweep by-pass	•	•
STANDARD EQUIPMENT		
FILTER PANEL POLYESTER ULTRA WEB	1464839000	1464839000
BROOM SIDE 280X450 MIX STEEL	1465318000	1465318000
MAT FLOOR KIT	1464957000	1464957000
BEACON KIT	1464948000	1464948000
BROOM MAIN 340X700 CHEVRON 6R PPL 0.8	1463913000	1463913000
ITEM NO.	9084400010	9084401010

# SW5500 - Ride-on sweepers w/hydraulic dump







#### SW5500 – the real Industrial Hybrid powered sweeper in the industry

- 25–30% increased sweeping performance with a worn main broom versus traditional sweeping system
- 30% increased hopper filling gives higher productivity as less time is spend dumping the debris
- The first real hybrid industrial sweeper on the market: flexible cleaning, low emissions and low noise
- Main broom adjustment easy to check by pushing a button
- All sweeping functions activated by OneTouch™ button and pressing the drive pedal
- All functions automatically stop when not driving to reduce consumptions
- High quality components and assembly
- Automatic speed reduction in tight curves and operating the hopper
- Warning alarm and reduced hopper lifting speed on slopes
- DustGuard™ system to reduce dust created by the side brooms
- Parallelogram concept on side broom for better and consistent sweeping performance
- Climb 20% on ramp/slopes while sweeping

The SW5500 offers a highly productive, comfortable and cost-effective way to sweep large floors and outdoor areas of dust and debris. A ride-on sweeper with the size and capacity to speed up your cleaning. Daily benefits like creating a safer environment and lowering the total costs of ownership make this machine an attractive choice for contract cleaners, industrial sites and factories, warehouses, distribution centers, sports arenas, parking lots of large retail stores or shopping malls, multi-store car parks, etc.



TECHNICAL DATA	SW5500 B	SW5500 D
Motor power source	Battery 24V	Diesel, Yanmar 4.1 kW
Max. speed (km/h)	9	10
Productivity 1 side broom theoretical/actual (m²/h)	10575/7405	11750/8225
Productivity 2 side brooms theoretical/actual (m²/h)	13500/9450	15000/10500
Working width with right side broom (mm)	1175	1175
Working width with 2 side brooms (mm)	1500	1500
Sound pressure level (dB(A))	68	85
Hopper volume (I)	150	150
Max. dumping height (cm)	165	165
Max. climbing rate (%)	20	20
Length x width x height (mm)	1875x1200x1565	1875x1200x1565
Operating weight (kg)	1101	838
FEATURES		
Charging indicator	•	
Multi-frequency filter shaker	•	•
Electric start		•
Overheat indicator		•
Main broom worn alarm	•	•
Timed multi-frequency filter shaker	•	•
STANDARD EQUIPMENT		
FILTER PANEL PAPER ULTRA WEB	1467174000	1467174000
BROOM SIDE 302X500 PPL 1.5 BLACK	1466670000	1466670000
BEACON KIT	1464948000	1464948000
BROOM MAIN 360X850 8R PPL 0.8	1465717000	1465717000
ITEM NO.	9084410010	9084412010

# SR1601 - Ride-on sweepers w/hydraulic dump







### Technically advanced sweeper that reduce your cleaning costs

- Excellent machine manoeuvrability thanks to the power steering (STD)
- Nilfisk DustGuard™ system completely controls airborne dust to reduce cleaning time
- Free floating main broom and fine tuning knob adjustment increases productivity and performance
- MaxAccess™ system provides fast and easy access to facilitate servicing
- The strong yet lightweight rotomoulded polyethylene covers and bumpers over a steel chassis provide automobile industry quality protection
- NoTools™ system speeds main broom and side broom changing cutting down on service time

SR1601 is claimed to be the most technically advanced sweeper in its category, with innovations that increase cleaning productivity whilst simplifying operating and servicing requirements. Designed for industrial applications such as heavily soiled factories, construction sites, parking etc.



TECHNICAL DATA	SR 1601	SR 1601 D	SR 1601 HD	SR 1601 LPG	SR 1601 MAXI	SR 1601 MAXI	SR 1601 MAX
Motor power source	Battery 48V	Diesel, 3cyl. 16,3 kW	Diesel, 3cyl. 16,3 kW	LPG, 3cyl. 23.1kW/31HP	Diesel, 3cyl. 16,3 kW/	Battery 48V	LPG, 3cyl. 23.1kW/31HP
Max. speed (km/h)	8	12	12	12	12	8	12
Productivity 1 side broom theoretical/actual (m²/h)	10000/7000	15000/10500	15000/10500	15000/10500	10000/7000	10000/7000	10000/7000
Productivity 2 side brooms theoretical/actual (m <sup>2</sup> /h)	12800/8960	19200/13440	19200/13440	19200/13440	19200/13440	12800/8960	19200/13440
Working width with right side broom (mm)	1250	1250	1250	1250	1250	1250	1250
Working width with 2 side brooms (mm)	1600	1600	1600	1600	1600	1600	1600
Sound pressure level (dB(A))	69.5	88	88	87	88	69.5	87
Hopper volume (I)	315	315	315	315	315	315	315
Max. dumping height (cm)	159	159	159	159	159	159	159
Max. climbing rate (%)	20	25	25	25	25	20	25
Length x width x height (mm)	2220x1320x1460	2220x1320x1460	2220x1320x1460	2220x1320x1460	2220x1320x1460	2220x1320x1460	2220x1320x1460
Operating weight (kg)	1295	1050	1268	1052	1070	1315	1072
FEATURES							
Left side broom ppl					•	•	•
Power steering	•	•	•	•	•	•	•
Adjustable steering					•	•	•
Misting system					•	•	•
Adjustable seat	•	•	•	•	•	•	•
STANDARD EQUIPMENT							
FLTR PANEL ULTRA-WEB CELLULOSE	8-24-04139-1	8-24-04139-1	8-24-04139-1	8-24-04139-1	8-24-04139-1	8-24-04139-1	8-24-04139-1
BROOM LEFT SIDE PPL KIT					33019173	33019173	33019173
BROOM SIDE 300X500 PPL 1.5	33021313	33021313	33021313	33021313	33021313	33021313	33021313
ARMREST RT SEAT KIT	33019556	33019556	33019556	33019556	33019556	33019556	33019556
HOPPER PROTECTION KIT			33021392				
PRE MISTING SYST. 12V KIT					33019175		33019175
PRE MISTING SYST. 48V KIT						33019377	
PULLEY D3 HT KUBOTA KIT			33020810				
STEERING ADJUSTABLE KIT					33019174	33019174	33019174
WHEELS FOAMED KIT		33022245	33022245	33022245	33022245		33022245
WHEELS SOLID KIT	33023020					33023020	
AMBER STROBE NO OHG	56507038	56507038	56507038	56507038	56507038	56507038	56507038
BROOM MAIN 310X900 CHEVRON 6R PPL 0.7	33018853	33018853		33018853	33018853	33018853	33018853
BROOM MAIN 310X900 CHEVRON 6R PPL 1.0			33021206				
HOPPER DUST FLAP KIT			33020372				
ITEM NO.	13300103	13300101	13300175	13300105	13300148	13300149	13300161

# SW8000 - Ride-on sweepers w/hydraulic dump







### Professional cleaning that wouldn't let you down - ever!

- The unique DustGuard™ feature with misting nozzles sprays a fine fog of moisture to the front and side brooms, effectively controlling airborne dust for a cleaner environment.
- The main broom 1.3 meter sweeping path is the widest in the industry, providing you better performance and faster cleaning.
- With side brooms the total cleaning width of SW8000 is 2 meters.
- The strong polyethylene covers offer a high driving protection and even absorbing bumps. At the same time, they are fully recyclable in line with Nilfisk's environmental awareness policy.

SW8000 puts you in the driver's seat of the most advanced and innovative industrial class ride-on sweepers. With its extraordinary 2 meters wide sweeping path, SW8000 lets you sweep and clean large areas, such as parking lots, warehouses and factory floors.



TECHNICAL DATA	SW8000 165D CAB HEATER	SW8000 165D CAB HEATER AC	SW8000 165LPG CAB HEATER	SW8000 165LPG CAB HEATER AC	SW8000 D	SW8000 LPG
Motor power source	Diesel	Diesel	LPG	LPG	Diesel	LPG
Max. speed (km/h)	15	15	15	15	15	15
Productivity 1 side broom theoretical/actual (m²/h)	23925/16750	23925/16750	23925/16750	23925/16750	23925/16750	23925/16750
Productivity 2 side brooms theoretical/actual (m <sup>2</sup> /h)	29000/20300	29000/20300	29000/20300	29000/20300	29000/20300	29000/20300
Working width with right side broom (mm)	1650	1650	1650	1650	1650	1650
Working width with 2 side brooms (mm)	2000	2000	2000	2000	2000	2000
Sound pressure level (dB(A))	82.8	82.8	80.6	80.6	82.8	80.6
Hopper volume (I)	400	400	400	400	400	400
Max. dumping height (cm)	152	152	152	152	152	152
Max. climbing rate (%)	20	20	20	20	20	20
Length x width x height (mm)	2410x1630x1500	2410x1630x1500	2410x1630x1500	2410x1630x1500	2410x1630x1500	2410x1630x1500
Operating weight (kg)	1593	1593	1585	1585	1435	1427
FEATURES						
Adjustable steering and seat	•	•	•	•	•	•
Fuel gauge	•	•	•	•	•	•
Headlights	•	•	•	•	•	•
Amber safety beacon	•	•	•	•	•	•
Ergonomic driver seat	•	•	•	•	•	•
Parking brake	•	•	•	•	•	•
Variable high dump system	•	•	•	•	•	•
STANDARD EQUIPMENT						
FLTR PANEL ULTRA-WEB CELLULOSE	8-24-04139-1	8-24-04139-1	8-24-04139-1	8-24-04139-1	8-24-04139-1	8-24-04139-1
SIDE BROOM POLY 41 DEGREES	56508498	56508498	56508498	56508498	56508498	56508498
ARM REST RH ONLY	7-03-04250	7-03-04250	7-03-04250	7-03-04250	7-03-04250	7-03-04250
BACK UP ALARM KIT	56507023	56507023	56507023	56507023	56507023	56507023
FOAM FILLED TIRE KIT	56507037	56507037	56507037	56507037	56507037	56507037
SWITCH KIT-OPERATOR PRESENCE	56107668	56107668	56107668	56107668	56107668	56107668
TILT STEERING OPTION	56107810	56107810	56107810	56107810	56107810	56107810
AMBER STROBE CAB	56508825	56508825	56508825	56508825		
AMBER STROBE NO OHG					56507038	56507038
MAIN BROOM PROEX-WIRE	56507424	56507424	56507424	56507424	56507424	56507424
ITEM NO.	56383691	56383690	56383693	56383692	56107513	56107512



## Overview of accessories



main broom natural For applications with fine dust, sensitive floors and carpet sweeping



Main broom steel+ppl
Popular for use to sweep both
indoors and outdoors



**headlight**Can be fitted to the front of the sweeper to improve visibility



**Flashing beacon**Draws attention to the machine in its working environment



**side broom protection**Protect the side brooms of the machine



**On-board charger**For both Wet and Gel Batteries



**NoN marking skirts**Skirts for sweeping on highly sensitive floors



Non marking skirts, natural fibre main and side brooms, pre-filter. To be used in carpet sweeping applications



Brush, left side kit
Sweeps the dirt and debris into the path of the main broom.
Enlarges the total sweeping path and consequently the productivity of the sweeper



filters

Paper filter: Works well in dry, high dust conditions Polyester: Excellent in moist applications, can be washed, dried and re-used



Overhead guard

For additional operator safety, especially in warehouses and Industry

### Overview of accessories



Main broom natural

Excellent material for dust control and sweeping fine debris, but has a relatively shorter wear life than other materials.



Main broom PPL + steel

Popular for use to sweep both indoors and outdoors



Main broom ppL

Superior pickup of sand, gravel and litter. Less aggressive on the floor compared to the PPL+STEEL



Solid, Super elastic tires

Can not puncture, mostly used in industry with metal chips or nails



Suspension seat

Comfortable seat with adjustable suspension based on operator's weight



Front corner guards

Protect the front of the machine



Litter vac

Suitable for cleaning hard to reach spots like dock plates, under steps or shelving etc.



DustGuard™ kit

To control air borne dust on the side broom/s



Working light front

The front and rear lights provide light on focused areas where the headlights do not reach



Working light rear



Overhead guard

For additional operator safety, especially in warehouses and industry



Raised air intake

Elevates engine air intake level. Used in very dusty applications



# FM400 L – Low speed single discs







# Silent cleaning and stripping of hard floor – you get the job done quickly and efficiently

- Price competitive: Nilfisk quality and performance for less money
- High performance: Powerful scrubbing and stripping in a smart construction
- Common design: Recognized Nilfisk design signals cost savings and easy handling
- Common accessories: No complexity and easy to operate
- Improved features: Cable hook for the operator, big wheels, easy cable storage, ergonomic handle and improved safety
- A complete range of optional accessories to suit specific tasks
- Also run at 230V/60hz

FM400 L machines have a 43 cm brush/pad diameter and it is designed for medium-duty usage, comfortable and fatigue free operation, effective results. Scrubbing and spray cleaning and stripping of hard floors are handled efficiently and quickly.



TECHNICAL DATA	FM400 L
Rated power (W)	1100
Sound pressure level at 1.5 m (dB(A) ISO 3744)	59
Brush/pad speed (RPM)	180
Brush torque (nm)	63
Brush/pad diameter (mm)	430
Cable length (m)	15
Height with handle vertical (mm)	1236
Height motorhousing (mm)	323
Handle vibration level (m/s²)	<2.5
Length x width x height (mm)	572x445x1236
Weight (kg)	37
FEATURES	
Spray cleaning	•
Carpet shampooing	•
Sanding	•
Cable holder	•
Ergonomic handle	•
Integrated plug holder	•
Easy cable change	•
ITEM NO.	56380056

# FM400 H – High speed single discs







# High speed polishing and spray cleaning of hard floors ensuring you excellent results

- Price competitive: Nilfisk quality and performance for less money
- High performance: Fast and efficient with a low sound level
- Common design: Recognized Nilfisk design signals cost savings and easy handling
- Common accessories: No complexity and easy to operate
- Improved features: Cable hook for the operator, big wheels, easy cable storage, ergonomic handle and improved safety
- A complete range of optional accessories to suit specific tasks

Ideal for high-speed polishing and spray cleaning of hard floors. The balance is excellent and the solid aluminium construction provides durability and extended life.



TECHNICAL DATA	FM400 H
Rated power (W)	1500
Sound pressure level at 1.5 m (dB(A) ISO 3744)	61
Brush/pad speed (RPM)	410
Brush torque (nm)	36
Brush/pad diameter (mm)	430
Cable length (m)	15
Height with handle vertical (mm)	1236
Height motorhousing (mm)	323
Handle vibration level (m/s²)	<2.5
Length x width x height (mm)	572x445x1236
Weight (kg)	40
FEATURES	
Cable holder	•
Click on-off brush	•
Offset brush	•
Ergonomic handle	•
High visibility cable	•
Integrated plug holder	•
Belt drive	•
ITEM NO.	56380058

# FM400 D – Two speed single discs







### Cost-effective maintenance of virtually all floors

- Price competitive: Nilfisk quality and performance for less money
- High performance: Powerful scrubbing or polishing
- Common design: Recognized Nilfisk design signals cost savings and easy handling
- Common accessories: No complexity and easy to operate
- Improved features: Cable hook for the operator, big wheels, easy cable storage, ergonomic handle and improved safety
- A complete range of optional accessories to suit specific tasks

FM400 D offers the choice of either 185 or 370 rpm for easy, efficient and cost-effective maintenance of virtually all floors. Built for standard and medium-duty use, this unit handles scrubbing as well as high-speed spray cleaning or polishing.



TECHNICAL DATA	FM400 D
Rated power (W)	1100/1500
Sound pressure level at 1.5 m (dB(A) ISO 3744)	61
Brush/pad speed (RPM)	185/370
Brush torque (nm)	58/40
Brush/pad diameter (mm)	430
Cable length (m)	15
Height with handle vertical (mm)	1236
Height motorhousing (mm)	323
Handle vibration level (m/s²)	<2.5
Length x width x height (mm)	572x445x1236
Weight (kg)	40
FEATURES	
Carpet shampooing	•
Dual power	•
Offset brush	•
Ergonomic handle	•
High visibility cable	•
Integrated plug holder	•
Belt drive	•
ITEM NO.	56380061

# **BU500 – Electric cord burnishers**







### Ease of use and reliability at competitive price

- Price competitive: extremely competitive on prices against major competitors
- Ultra high speed to make perfect shining floors
- Common design: Nilfisk image to the Customer is improved, cost savings and complexity reduction
- Improved features: cable hook, plug holder, big wheels, safety, easy cable replacement, ergonomic handle

BU500 burnisher is a 1500rpm belt driven machine. Improved ergonomy in use and transportation, thus adding special features as ergonomic handle, trip fuse, built-in padholder, 15m cable, robust construction.



TECHNICAL DATA	BU500
Protection class / IP protection	IPX0
Rated power (W)	1100
Sound pressure level at 1.5 m (dB(A) ISO 3744)	<70
Brush/pad diameter (mm)	510
Brush/pad pressure (g/cm²)	10
Brush/pad speed (RPM)	1500
Brush torque (nm)	12
Cable length (m)	15
Height motorhousing (mm)	na
Height with handle vertical (mm)	1261
Length x width x height (mm)	824x566x1261
Weight (kg)	41
FEATURES	
Cable holder	•
Ergonomic handle	•
Folding handle	•
High visibility cable	•
Easy cable change	•
Belt drive	•
Burnishing	•
ITEM NO.	56380063

# **BU800** – Battery walk-behind burnishers







# For medium/large hard floors, nothing compares to this outstanding burnisher

- Simple controls and low profile design make operating the unit easier and safer
- Self-regulating pad pressure eliminates the need for adjustments and reduces operator errors
- The burnishing deck automatically lifts when the motor is turned off for better floor protection
- On board battery charger saves downtime and adds convenience
- Excellent active dust control with HEPA filtration optional for dust sensitive areas

BU800 represents the most technically advanced means of restoring and maintaining a high gloss shine on floors. The many features include easier-than-ever operation, added safety considerations, passive and (optional) active dust control.



TECHNICAL DATA	BU800
Protection class / IP protection	IPX4
Rated power (W)	1500
Sound pressure level at 1.5 m (dB(A) ISO 3744)	68
Brush/pad diameter (mm)	508
Brush/pad pressure (g/cm²)	Automatic
Brush/pad speed (RPM)	1500
Length x width x height (mm)	1270x580x1050
Weight (kg)	79
FEATURES	
Dust collection	•
Non marking traction wheels	•
Pressure regulation	•
Floating deck	•
Ergonomic handle	•
STANDARD EQUIPMENT	
CHARGER BATTERY 36V 21A	41036A
ITEM NO.	56383526

## **Overview of accessories**



Pad holders Low speed High speed Flexi



**5 brushes satelite system** Available with different bristles diameter and material (for 510 B/B3 only)



**Natural fiber**For uneven and sensitive floors



**Hard floor brush**For medium/heavy scrubbing



**Heavy duty brush**For deep cleaning, difficult removal and sripping



Hard pads
Black: stripping
Brown: stripping
Blue: stripping/scrubbing



**Soft pads**Orange Green: polishing high speed. **Beige:** polishing low speed. **White:** spray cleaning/polishing



Medium pads Green: scrubbing Red: soft scrubbing/ spray cleaning.



**Foam generator** For carpet dry foam method



**Dust skirt**To be applied together with vac unit (dry applications)



**Spray bottle kit**For spray cleaning applications



**Solution tank**For scrubbing applications



**Vacuum kit**To be used in all applications where dust should be collected and/or controlled



ECO brilliance pads



# **ES300 – Portable self-contained carpet cleaners**







#### Cleaning carpet spaces in a big way with the ES300

- Front mounted nozzle makes dumping faster and easier for the operator
- The removable, increased capacity recovery tank along with the stowable handle make dumping and refilling much simpler
- Ergonomic adjustable handle for easy operation adjusts to the height of the operator
- A floating brush head adjusting automatically for better carpet contact and improved water recovery
- A larger tank with increased water capacity provides extended cleaning time and fewer refills
- Powerful vacuum motor for efficient removal of dirt and faster dry times
- Adjustable handle design for easy maneuverability in tight spaces
- Compact design makes storage and maintenance more convenient
- Quickly switch between cleaning modes
- Large wheels for easy maneuverability for up/down stairs


With the ES300 Nilfisk has entered a new era of carpet cleaning. This machine is ideal for cleaning your high and light traffic carpeted areas and not only remove dirt and water, but the machine also meets the highest standards to extend the life or your carpets. Besides its great productivity and cleaning performance ES300 is easy to operate.



TECHNICAL DATA	ES300 NILFISK
Rated power (W)	1824
Working width (mm)	410
Suction width (mm)	480
Pump pressure (bar/psi)	-/120
Brush speed (RPM)	1950
Brush motor (W)	249
Vacuum motor power (W)	1119
Sound pressure level at 1.5 m (dB(A) ISO 3744)	68
Solution/recovery tank (I)	34/26.5
Vacuum shoe width (cm)	48
Length x width x height (mm)	711x489x813
Gross weight (gvw) (kg)	46.3
FEATURES	
Adjustable handle	•
No tool brush removal	•
No tool vacuum shoe removal	•
Hard floor cleaning	•
Removable recovery lid	•
Ergonomic handle	•
Solution tank with easy drain system	•
STANDARD EQUIPMENT	
HAND TOOL/HOSES ASSEMBLY	56265767
BRUSH ASSEMBLY 16	56265044
ITEM NO.	56265503

# Overview of accessories: carpet extractors







Carpet accessory kit



# MC 2C – Compact mobile cold water







### Ideal cold water cleaning for everyday tasks

- Powerful detergent application with universal foam sprayer – easy to use
- 4-in-1 nozzle ensures easy change between nozzles – always the right nozzle for almost all cleaning tasks and applications
- New hose-reel guide for an easy, one-handed rollup and protected hose storage
- Easier water-flow regulation for a quick adjustment according to the cleaning tasks
- Ergo 2000 spray gun and ergonomic accessory concept improve handling and reduce strain
- Easy transport and storage (wheels, telescopic handle, lifting bar)
- High-quality alloy pump head and automatic start/stop for a high wear resistance

The MC 2C range is destined for low intensity use and routine cleaning tasks. They offer excellent cleaning performance, professional spray equipment, good storage facilities and handling.





TECHNICAL DATA	MC 2C-120/520 T EU	MC 2C-120/520 XT EU	MC 2C-140/610 XT EU	MC 2C-150/650 XT EU	MC 2C-150/650 EU
Recommended avg. hours of use per day	1	1	1	1	1
Pump pressure (bar/MPa)	120/12	120/12	140/14	150/15	150/15
Cleaning impact (kg/force)	2.2	2.2	2.5	2.9	2.9
Water flow Qmax/Qiec (l/h)	520/470	520/470	610/540	650/570	650/570
Max. inlet temperature (°C)	60	60	60	60	60
Length x width x height (mm)	394x391x955	394x391x955	394x391x955	394x391x955	394x391x955
Weight (kg)	27.1	32.8	32.8	32.8	30.1
El cable (m)	5	5	5	5	5
Nozzle size	0340	0340	0340	0340	0340
Power consumption (kW)	2.3	2.3	2.9	3.3	3.3
Voltage/phase/frequency/current (V/~/HZ/A)	230/1/50/10	230/1/50/10	230/1/50/12.6	230/1/50/14.5	230/1/50/14.5
Pump (RPM)	2800	2800	2800	2800	2800
FEATURES					
Pistons/number of pistons	•	•	•	•	•
Automatic start/stop	•	•	•	•	•
Gun Holder	•	•	•	•	•
Cable hook turnable	•	•	•	•	•
Foam sprayer attachment	•	•	•	•	•
Detergent bottle 2,5l	•	•	•	•	•
Hose reel		•	•	•	
STANDARD EQUIPMENT					
GARDENA COMPATIBLE MALE 3/4" ACCESSORY	32541	32541	32541	32541	32541
HOSE DN6 10M 1W FOR P-2	126528620				126528620
HP-HOSE DN6 15M SWIVEL-3/8 F. HOSE REEL		101406176	101406176	101406176	
ergo 2000 standard w. hose swivel	106403122	106403122	106403122	106403122	106403122
FLEXOPOWER PLUS BEND W/O NOZZLE					106402282
4-IN-1 LANCE INCL 0340 ALUMINUM HEAD	106408250	106408250	106408250	106408250	
TORNADO NOZZLE					101119735
ITEM NO.	128471352	128471354	128471350	128471359	128471358

# MC 3C – Compact mobile cold water







# Compact cold water high pressure washer with external FoamSprayer detergent system

- Powered by a 2800 rpm high-quality motor pump
- Brass pump head and three stainless steel pistons
- Pressure activated unloader system
- Pump oil tank with oil level sight and fill/empty function
- Easy opening and removing of cabinet for access to the pump
- Innovative holder protects Spray Gun from damage during storage and transport
- Turnable cable hook for easier removal and wind-up of power cable
- Robust design with larger 250 mm wheels optimizes transport over rough surfaces and steps
- Aluminum lifting bar

MC 3C is designed for light, general cleaning tasks and is the ideal choice for tradesmen, small building companies, small garages and farms. This range is equipped with a professional 2800 rpm motor pump unit with stainless steel pistons for light cleaning tasks, developed for low to medium intensity use.





TECHNICAL DATA	MC 3C-150/660	MC 3C-150/660 XT	MC 3C-160/770	MC 3C-170/820	MC 3C-170/820 XT
Recommended avg. hours of use per day	3	3	3	3	3
Pump pressure (bar/MPa)	150/15	150/15	160/16	170/17	170/17
Cleaning impact (kg/force)	3	3	3.6	4	4
Water flow Qmax/Qiec (I/h)	660/600	660/600	770/700	820/750	820/750
Max. inlet temperature (°C)	60	60	60	60	60
Length x width x height (mm)	382x382x1017	382x382x1017	382x382x1017	382x382x1017	382x382x1017
Weight (kg)	36	38	36	36	38
El cable (m)	5	5	5	5	5
Nozzle size	.0370	.0370	25045	.0435	.0435
Power consumption (kW)	3.5	3.5	4	4.4	4.4
Voltage/phase/frequency/current (V/~/HZ/A)	230/1/50/15	230/1/50/15	400/3/50/7.1	400/3/50/7.4	400/3/50/7.4
FEATURES					
Hose reel		•			•
Hose storage holders	•		•	•	
Spray Gun Holder	•	•	•	•	•
Cable Hook, turnable	•	•	•	•	•
Lock for Hose Reel		•			•
Foam Sprayer	•	•		•	•
Detergent Canister 2.5 ltr	•	•		•	•
STANDARD EQUIPMENT					
ERGO COUPLING KIT	101119496		101119496	101119496	101119496
GARDENA COMPATIBLE MALE 3/4" ACCESSORY	106404529	106404529	106404529	106404529	106404529
10 M WIRE HOSE DN6	301002275		301002275	301002275	
HP-HOSE DN6X15M MC 3-4		107142542			107142542
HOSE REEL FOR MC 3-4		107145803			107145803
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122	106403122	106403122	106403122
FLEXOPOWER PLUS 990 W/O NOZZLE BLUE	106408228			106408228	
UNIVERSAL PLUS LANCE 940 BEND W/O NOZZ			106403036		
4-IN-1 LANCE INCL 0370 ALUMINUM HEAD		106408252			
4-IN-1 LANCE INCL 0435 ALUMINUM HEAD					106408254
HP-NOZZLE 1/8-27NPT MEG 25045			107142579		
NOZZLE 0370 INDICATION RING BRONZE	101119737				
NOZZLE 0435 INDICATION RING BLUE				101119739	
DETERGENT TANK W. SEALING CAP - 2.5 LTR.	106403162	106403162		106403162	106403162
ITEM NO.	107146376	107146380	107146381	107146382	107146384

## MC 4M - Medium mobile cold water







# Mid range cold water high pressure washer with external FoamSprayer detergent system

- Powered by a 1450 rpm high-quality motor pump
- Brass pump head and three ceramic coated pistons
- Pressure activated unloader system
- Pump oil tank with oil level sight and fill/empty function
- Easy opening and removing of cabinet for access to the pump
- Innovative holder protects Spray Gun from damage during storage and transport
- Turnable cable hook for easier removal and wind-up of power cable
- Robust design with larger 250 mm wheels optimizes transport over rough surfaces and steps
- Aluminum lifting bar

MC 4M is designed for light, general cleaning tasks and is the ideal choice for tradesmen, small building companies, small garages and farms. This range is equipped with a professional 1450 rpm motor pump unit with ceramic coated pistons, developed for low to medium intensity use.





TECHNICAL DATA	MC 4M-140/620	MC 4M-160/620	MC 4M-160/620 XT	MC 4M-180/740	MC 4M-180/740 XT
Recommended avg. hours of use per day	4	4	4	4	4
Pump pressure (bar/MPa)	140/14	160/16	160/16	180/18	180/18
Cleaning impact (kg/force)	2.8	2.9	2.9	3.6	3.6
Water flow Qmax/Qiec (I/h)	620/580	620/560	620/560	740/660	740/660
Max. inlet temperature (°C)	60	60	60	60	60
Length x width x height (mm)	382x382x1017	382x382x1017	382x382x1017	382x382x1017	382x382x1017
Weight (kg)	39	39	41	40	42
El cable (m)	5	5	5	5	5
Nozzle size	25035	.0340	.0340	.0370	.0370
Power consumption (kW)	2.9	3	3	4	4
Voltage/phase/frequency/current (V/~/HZ/A)	230/1/50/12.5	230/1/50/13.4	230/1/50/13.4	400/3/50/7.4	400/3/50/7.7
FEATURES					
Hose reel			•		•
Spray Gun Holder	•	•	•	•	•
Cable Hook, turnable	•	•	•	•	•
Lock for Hose Reel			•		•
Foam Sprayer		•	•	•	•
Detergent Canister 2.5 ltr		•	•	•	•
STANDARD EQUIPMENT					
BRACKET F. DETERGENT TANK 2.5L		107142505	107142505	107142505	107142505
ERGO COUPLING KIT	101119496	101119496	101119496	101119496	101119496
GARDENA COMPATIBLE MALE 3/4" ACCESSORY	106404529	106404529	106404529	106404529	106404529
10 M WIRE HOSE DN6	301002275	301002275		301002275	
HP-HOSE DN6X15M MC 3-4			107142542		107142542
HOSE REEL FOR MC 3-4			107145803		107145803
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122	106403122	106403122	106403122
FLEXOPOWER PLUS 990 W/O NOZZLE BLUE		106408228		106408228	
UNIVERSAL PLUS LANCE 940 BEND W/O NOZZ	106403036				
4-IN-1 LANCE INCL 0340 ALUMINUM HEAD			106408250		
4-IN-1 LANCE INCL 0370 ALUMINUM HEAD					106408252
HP-NOZZLE 1/8-27NPT MEG 25035	107142577				
NOZZLE 0340 INDICATION RING VIOLET		101119735			
NOZZLE 0370 INDICATION RING BRONZE				101119737	
DETERGENT TANK W. SEALING CAP - 2.5 LTR.		106403162	106403162	106403162	106403162
HOLDER F. FOAM GUN		107142504	107142504	107142504	107142504
ITEM NO.	107146395	107146400	107146403	107146406	107146410

## MC 5M PA-FA - Medium mobile cold water







### Innovative and versatile mid range cold water high pressure washers

- Tough and sturdy design with 30 mm steel frame Optimal storage and transport with foldable handle and easy lifting points
- High mobility with large rear wheels and most models with front castor wheel or a foot
- Easy accessibility to pump, optimal service concept
- Ergonomic accessory concept
- 1450 rpm motor and 3 ceramic piston pump for intense use
- Ergonomic accessory concept

The MC 5M PA-FA mid range are the most versatile partners for demanding customers in agriculture, industry, construction and automotive.

The MC 5M range succeeds in combining an unmatched level of mobility and ease of use with unbeatable robustness, optimal service and great storage features.





TECHNICAL DATA	MC 5M-180/840	MC 5M-180/840 XT	MC 5M-200/1000	MC 5M-200/1000 XT	MC 5M-200/1050
Recommended avg. hours of use per day	5	5	5	5	5
Pump pressure (bar/MPa)	180/18	180/18	200/20	200/20	200/20
Cleaning impact (kg/force)	4.1	4.1	5.3	5.3	5.6
Water flow Qmax/Qiec (I/h)	840/760	840/760	1000/940	1000/940	1050/960
Max. inlet temperature (°C)	60	60	60	60	60
Length x width x height (mm)	735x570x1020	890x570x1020	735x570x1020	890x570x1020	735x570x1020
Weight (kg)	66	72	71	76	73
El cable (m)	5	5	5	5	5
Nozzle size	.0400	.0400	.0500	.0500	.0500
Power consumption (kW)	4.8	4.8	6.1	6.1	6.1
Voltage/phase/frequency/current (V/~/HZ/A)	400/3/50/8.5	400/3/50/8.5	400/3/50/11.4	400/3/50/11.4	400/3/50/11.4
FEATURES					
Detergent tank					•
Hose reel		•		•	
Parking brake					•
Automatic start/stop	•	•	•	•	•
2 x detergent injector					
Water flow regulation					•
1 x detergent injector					•
STANDARD EQUIPMENT					
ERGO COUPLING KIT	101119496	101119496	101119496	101119496	101119496
HOSE NOZZLE 20R3/4	61369	61369	61369	61369	61369
10 M WIRE HOSE DN6	301002275		301002275		
HP-HOSE DN6 15M 3/8-3/8 F. QUICK COUPL		101406175		101406175	
HOSE DN8 1 WIRE 10M W.ERGO FEMALE COUPL.					101405770
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122	106403122	106403122	106403122
TORNADO PLUS 1120 BEND W/O NOZZLE					106403010
FLEXOPOWER PLUS 1120 W/O NOZZLE BLUE	106408227	106408227	106408227	106408227	
TURBOHAMMER PLUS 1115 STRAIGHT W12 0400		106403002			
TURBOHAMMER PLUS 1130 STRAIGHT W12 0500				106403003	
NOZZLE 0400 INDICATION RING METAL GREY	101119738	101119738			
NOZZLE 0500 INDICATION RING YELLOW			101119741	101119741	101119741
ITEM NO.	107146705	107146708	107146727	107146728	107146711

## MC 5M PA-FA - Medium mobile cold water







### Innovative and versatile mid range cold water high pressure washers

- Tough and sturdy design with 30 mm steel frame Optimal storage and transport with foldable handle and easy lifting points
- High mobility with large rear wheels and most models with front castor wheel or a foot
- Easy accessibility to pump, optimal service concept
- Ergonomic accessory concept
- 1450 rpm motor and 3 ceramic piston pump for intense use
- Ergonomic accessory concept

The MC 5M PA-FA mid range are the most versatile partners for demanding customers in agriculture, industry, construction and automotive. The MC 5M range succeeds in combining an unmatched level of mobility and ease of use with unbeatable robustness, optimal service and great





storage features.

TECHNICAL DATA	MC 5M-200/1050 FA	MC 5M-200/1050 XT	MC 5M-220/1130	MC 5M-220/1130 FA	MC 5M-220/1130 XT
Recommended avg. hours of use per day	5	5	5	5	5
Pump pressure (bar/MPa)	200/20	200/20	220/22	220/22	220/22
Cleaning impact (kg/force)	5.6	5.6	6.2	6.2	6.2
Water flow Qmax/Qiec (I/h)	1050/960	1050/960	1130/1040	1130/1040	1130/1040
Max. inlet temperature (°C)	60	60	60	60	60
Length x width x height (mm)	735x570x1020	890x570x1020	735x570x1020	735x570x1020	890x570x1020
Weight (kg)	73	78	78	79	85
El cable (m)	5	5	5	5	5
		_	_	-	
Nozzle size	.0500	.0500	.0530	.0530	.0530
Power consumption (kW)	6.1	6.1	7.4	7.4	7.4
Voltage/phase/frequency/current (V/~/HZ/A)	400/3/50/11.4	400/3/50/11.4	400/3/50/13.3	400/3/50/13.3	400/3/50/13.3
FEATURES					
Detergent tank	•	•	•	•	•
Hose reel		•			•
Parking brake	•	•	•	•	•
Automatic start/stop	•	•	•	•	•
2 x detergent injector		•	•	•	•
Water flow regulation	•	•	•	•	•
1 x detergent injector	•				
STANDARD EQUIPMENT					
ERGO COUPLING KIT	101119496	101119496	101119496	101119496	101119496
HOSE NOZZLE 20R3/4	61369	61369	61369	61369	61369
HOSE DN8 1 WIRE 10M W.ERGO FEMALE COUPL.	101405770		101405770	101405770	
HOSE DN8 1 WIRE 15M W.ERGO FEMALE COUPL.		301001100			
HOSE DN8 1 WIRE 20M W.ERGO FEMALE COUPL.					301001101
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122	106403122	106403122	106403122
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010	106403010	106403010	106403010
TURBOHAMMER PLUS 1125 STRAIGHT W11 0550					106402292
TURBOHAMMER PLUS 1130 STRAIGHT W12 0500		106403003			
NOZZLE 0500 INDICATION RING YELLOW	101119741	101119741			
NOZZLE 0530 INDICATION RING RED			101119742	101119742	101119742
ITEM NO.	107146714	107146716	107146718	107146721	107146722


## MC 6P FA - Premium mobile cold water





### Premium performance, lifetime and ergonomics

- NA6 4 ceramic piston pump with 80°C inlet temp
- Tough and sturdy design with 30mm steel frame
- Optimal storage and transport with foldable handle and easy lifting points
- High mobility with large rear wheels and front castor wheel
- Easy accessibility to pump, optimal service concept
- Ergonomic accessory concept
- Flow activated control system
- Low pump oil safety function
- Water ajustment at pump head
- 2 way chemical dosing valve
- 2 detergent tanks







TECHNICAL DATA	MC 6P-170/ 1600 FA	MC 6P-170/ 1600 FAXT	MC 6P-180/ 1300 FA	MC 6P-180/ 1300 FAXT	MC 6P-200/ 1100 FAXT	MC 6P-250/ 1100 FA	MC 6P-250/ 1100 FAXT	MC 6P-20/ 1950 FA - EU	MC 6P-20/ 1950 FAXT - EU
Recommended avg. hours of use per day	6	6	6	6	6	6	6	6	6
Pump pressure (bar/MPa)	170/17	170/17	180/18	180/18	200/20	250/25	250/25	120/12	120/12
Cleaning impact (kg/force)	7.9	7.9	6.5	6.5	5.6	6.4	6.4	8.4	8.4
Water flow Qmax/Qiec (I/h)	1600/1500	1600/1500	1300/1200	1300/1200	1100/1000	1100/1010	1100/1010	1850/1950	1850/1950
Max. inlet temperature (°C)	80	80	80	80	80	80	80	80	80
Length x width x height (mm)	775x570x1020	930x570x1020	775x570x1020	930x570x1020	930x570x1020	775x570x1020	930x570x1020	930x570x1020	930x570x1020
Weight (kg)	89	96	86	93	85	89	96	89	96
El cable (m)	8	8	8	8	5	8	8	8	8
Nozzle size	.0950	.0950	.0700	.0700	.0550	.0475	.0475	.1500	.1500
Power consumption (kW)	8.8	9	7.4	7.7	7.3	8.3	8.8	7.5	7.5
Voltage/phase/frequency/ current (V/~/HZ/A)	400/3/50/16	400/3/50/16	400/3/50/14.5	400/3/50/14.5	400/3/50/13	400/3/50/15	400/3/50/15.5	400/3/50/16	400/3/50/16
FEATURES									
Hose reel		•		•	•		•		•
Food industry wheels and hose									
Pump oil warning system	•	•	•	•	•	•	•	•	•
Delayed automatic start stop	•	•	•	•	•	•	•	•	•
2 x detergent injector	•	•	•	•	•	•	•	•	•
STANDARD EQUIPMENT									
ERGO COUPLING KIT	101119496	101119496	101119496	101119496	101119496	101119496	101119496	101119496	101119496
HOSE NOZZLE 20R3/4	61369	61369	61369	61369	61369	61369	61369	61369	61369
HOSE DN8 1 WIRE 15M W. ERGO FEMALE COUPL.					301001100				
HP Hose DN10 10000 AGR-AGR	6101766		6101766			6101766		6101766	
HP Hose DN10 15000 AGR-AGR		1402064		1402064			1402064		1402064
HOSE REEL COMPLETE		106403143		106403143	106403143		106403143		106403143
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122		106403122	106403122	106403122	106403122	106403122	106403122	106403122
SPRAY HANDLE W. SWIVEL LOCK		106402190							
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010	106403010	106403010	106403010	106403010	106403010	106403010	106403010
TURBOHAMMER PLUS 1125 STRAIGHT W11 0550					106402292				
TURBOHAMMER PLUS 1125 STRAIGHT W11 0500							106402291		106402291
TURBOHAMMER PLUS 1125 STRAIGHT W11 0700				106402294					
TURBOHAMMER PLUS 1130 STR./NOZ. W11 1000		106403078							
NOZZLE 0550 INDICATION RING NEONGREEN					101119743				
NOZZLE 0700 INDICATION RING ORANGE			101119748	101119748					
TORNADO NOZZLE 0475						301150005	301150005	301150005	301150005
TORNADO NOZZLE 0950 DARK ROSE	101117655	101117655							
ITEM NO.	107146755	107146761	107146752	107146759	107146772	107146751	107146758	107147773	107146774

## MC 7P FA - Premium mobile cold water







### **Ultimate industrial quality**

- C3 4 ceramic piston pump with 85°C inlet temperature
- Tough and sturdy design with 30mm steel frame
- Optimal storage and transport with foldable handle and easy lifting points
- High mobility with large rear wheels and front castor wheel
- Easy accessibility to pump
- Optimal service concept, Ergonomic accessory concept
- Flow activated control system
- Low pump oil safety function
- Water adjustment at pump head
- 2 detergent tanks and 2-way dosing valve

The MC 7P industrial class cold water high pressure washer combines the renowned and unmatchable lifetime and quality of the C3, 4 piston pump with optimal ergonomics and mobility to offer an innovative and unbeatable partner for applications in heavy industry, large agriculture, transport and valetting, shipping and food industry.







TECHNICAL DATA	MC 7P-195/1280 FA	MC 7P-195/1280 FAXT	MC 7P-195/1280 FBFA	MC 7P-195/1280 FFA
Recommended avg. hours of use per day	7	7	7	7
Pump pressure (bar/MPa)	195/19.5	195/19.5	195/19.5	195/19.5
Cleaning impact (kg/force)	6.7	6.7	6.7	6.7
Water flow Qmax/Qiec (I/h)	1280/1180	1280/1180	1280/1180	1280/1180
Max. inlet temperature (°C)	85	85	70	85
Length x width x height (mm)	775x570x1020	930x570x1020	775x570x1020	775x570x1020
Weight (kg)	89	95	94	89
El cable (m)	8	8	8	8
Nozzle size	.0680	.0680	.0680	.0680
Power consumption (kW)	8	8	8	8
Voltage/phase/frequency/current (V/~/HZ/A)	400/3/50/14	400/3/50/15	400/3/50/14	400/3/50/14
Detergent tank capacity (I)	2 x 2.5	2 x 2.5	2 x 2.5	2 x 2.5
FEATURES				
Stainless steel frame			•	•
Hose reel		•		
Food industry wheels and hose			•	•
Pump oil warning system	•	•	•	•
Delayed automatic start stop	•	•	•	•
Water break tank			•	
STANDARD EQUIPMENT				
ERGO COUPLING KIT	101119496	101119496	101119496	101119496
HOSE NOZZLE 20R3/4	61369	61369	61369	61369
HP Hose DN10 10000 AGR-AGR	6101766			
HP Hose DN10 15000 AGR-AGR		1402064		
HP Hose DN10 Grey 10000 AGR-AGR			6101767	6101767
HOSE REEL COMPLETE		106403143		
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122	106403122	106403122
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010	106403010	106403010
TURBOHAMMER PLUS 1125 STRAIGHT W11		106402294		
0700 NOZZLE 0680 INDICATION RING GREY	101119747	101119747	101119747	101119747
FOAM INJECTOR W BYPASS S. S			6401243	
ITEM NO.	107146800	107146801	107146812	107146802

# MC 8P - Premium mobile cold water







## High-flow pressure washer for tough routine work

- Tough steel or stainless steel frame variants
- Slow running 1450 rpm motors with low noise level
- Ceramic pistons for longer working life
- Simple and easy to use
- Parking brake
- 15 m HP hose

The high power premium class line - combining high pressure and high water flow levels for routine cleaning in agriculture, transport or food industries. The MC 8P is a machine with high water flow - quick to install, easy to move around and comfortable to use.





TECHNICAL DATA	MC 8P-160/2500	MC 8P-160/2500 ST	MC 8P-180/2100
Description of the second of t	5	5	5
Recommended avg. hours of use per day	-	-	-
Pump pressure (bar/MPa)	160/16	160/16	180/18
Cleaning impact (kg/force)	12.5	12.5	11.1
Water flow Qmax/Qiec (I/h)	2500/2450	2500/2450	2100/2050
Max. inlet temperature (°C)	50	50	50
Length x width x height (mm)	900x660x910	900x660x910	900x660x910
Weight (kg)	130	130	130
El cable (m)	5	5	5
Nozzle size	.1590	.1590	.1200
Power consumption (kW)	14.5	14.5	14
Voltage/phase/frequency/current (V/~/HZ/A)	400/3/50/24.9	400/3/50/24.9	400/3/50/24
FEATURES			
Stainless steel frame		•	
SilentPower - 1450 rpm motor	•	•	•
Parking brake	•	•	•
Pneumatic wheels	•	•	•
Automatic on/off and delayed action	•	•	•
STANDARD EQUIPMENT			
ERGO COUPLING KIT	101119496	101119496	101119496
HOSE LINER 20 R1	6577	6577	6577
HP Hose DN10 15000 AGR-AGR			1402064
HP Hose DN12 15000 AGR-AGR	4810213	4810213	
ERGO 2000 STANDARD W. HOSE SWIVEL			106403122
SPRAY HANDLE W. SWIVEL LOCK	106402190	106402190	
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010	106403010
NOZZLE 1200 INDICATION RING CARAMELE			101119758
TORNADO + NZLE 1590 1/8-27NPT	301150004	301150004	
ITEM NO.	301002535	301002619	301002534

# MH 3C – Compact mobile hot water







### Compact and high performing

- EcoPower™ boiler with EcoMode function
- EcoPower™ boiler >92% efficiency giving reduced fuel costs
- Brass pump head
- Pressure activated unloader system
- Innovative design with 4 big wheels
- Easy to transport, can even be pushed/pulled across uneven surfaces
- Oil tank and oil sight
- Onboard diagnostics function

The MH 3C offers high cleaning efficiency and low running costs via optimal cleaning and heating performance. It is the ideal hot water unit for general light everyday cleaning in applications such as automotive, craftsmen and light farming.



TECHNICAL DATA	MH 3C-145/600 PA	MH 3C-145/600 PAX	MH 3C-180/780 PA	MH 3C-180/780 PAX
Recommended avg. hours of use per day	1-2	1-2	1-2	1-2
Pump pressure (bar/MPa)	145/14.5	145/14.5	180/18	180/18
Cleaning impact (kg/force)	2.6	2.6	3.8	3.8
Water flow Qmax/Qiec (I/h)	600/530	600/530	780/710	780/710
Water temperature (water/steam) (°C)	80/150	80/150	80/150	80/150
Max. inlet temperature (°C)	40	40	40	40
Fuel consumption at ΔT=45°C (kg/h)	2.4	2.4	3.2	3.2
Fuel tank (l)	15	15	15	15
Length x width x height (mm)	1010x700x1016	1010x700x1016	1010x700x1016	1010x700x1016
Weight (kg)	115	119	115	119
El cable (m)	5	5	5	5
Nozzle size	.0340	.0340	.0400	.0400
FEATURES				
Single-phase	•	•		
Three phase			•	•
EcoPower boiler-high efficiency	•	•	•	•
Ergo accessory system	•	•	•	•
Spray Gun Holder	•	•	•	•
Cable Hook, turnable	•	•	•	•
2 lance holder	•	•	•	•
STANDARD EQUIPMENT				
ERGO COUPLING KIT	101119496	101119496	101119496	101119496
HOSE NOZZLE 20R3/4	61369	61369	61369	61369
HP HOSE DN6X10M QC 3/8IN NILFISK HW	101406069		101406069	
HP-HOSE DN6 15M 3/8-3/8 F. QUICK COUPL		101406175		101406175
HOSE REEL NILFISK ACCESSORY		106403184		106403184
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122	106403122	106403122
UNIVERSAL PLUS LANCE 940 BEND W/O NOZZ	106403036	106403036	106403036	106403036
NOZZLE 0340 INDICATION RING VIOLET	101119735	101119735		
NOZZLE 0400 INDICATION RING METAL GREY			101119738	101119738
ITEM NO.	107146880	107146881	107146890	107146891

# MH 3M PA - Medium mobile hot water







### Optimal ergonomics, reliable cleaning

- High efficiency 4 pole motors
- EcoPower boiler with EcoMode function
- Brass pump head
- 3 ceramic coated pistons
- Pressure activated unloader system
- Simple fuel level sight
- Easy access to components
- Easy pump oil service functions with tank and oil sight
- Innovative design with 4 big wheels
- Easy to transport, can even be pushed/pulled across uneven surfaces

The MH 3M series takes mid-range hot water high pressure washers to a new level, meeting the latest productivity demands in the market. The MH 3M is equipped with our semi industrial NA4 pump with 3 ceramic coated pistons and a high efficiency 4 pole motor. It offers ideal performance levels for general hot water cleaning and the efficient EcoPower Boiler.



TECHNICAL DATA	MH 3M-140/580 PA	MH 3M-140/580 PAX 230/1/50 EU	MH 3M-160/770 PA	MH 3M-160/770 PAX 400/3/50 EU
Recommended avg. hours of use per day	3	3	3	3
Pump pressure (bar/MPa)	140/14	140/14	160/16	160/16
Cleaning impact (kg/force)	2.8	2.8	3.6	3.6
Water flow Qmax/Qiec (l/h)	580/580	580/580	770/700	770/700
Water temperature (water/steam) (°C)	80	80	80	80
Max. inlet temperature (°C)	40	40	40	40
Fuel consumption at ΔT=45°C (kg/h)	2.6	2.6	3.1	3.1
Fuel tank (I)	15	15	15	15
Length x width x height (mm)	1010x700x1016	010x700x1016	1010x700x1016	010x700x1016
Weight (kg)	114	119	114	119
El cable (m)	5	5	5	5
Nozzle size	.0370	.0370	.0400	.0400
FEATURES				
Fuel tank	•	•	•	•
Delayed automatic start stop	•	•	•	•
Fuel sight from outside	•	•	•	•
ECO mode feature	•	•	•	•
2 lance holder	•	•	•	•
Large wheel - 4 pcs.	•	•	•	•
Anti Stone	•	•	•	•
STANDARD EQUIPMENT				
ERGO COUPLING KIT	101119496	101119496	101119496	101119496
HOSE NOZZLE 20R3/4	61369	61369	61369	61369
HOSE DN6 15 M 1W - 3/8-QC				6528613
HP HOSE DN6X10M QC 3/8IN NILFISK HW	101406069	101406069	101406069	
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122	106403122	106403122
UNIVERSAL PLUS LANCE 940 BEND W/O NOZZ	106403036	106403036	106403036	106403036
NOZZLE 0370 INDICATION RING BRONZE	101119737	101119737		
NOZZLE 0400 INDICATION RING METAL GREY			101119738	101119738
ITEM NO.	107146895	107146896	107146903	107146905

## MH 4M FA/PA - Medium mobile hot water







### Performance, long life-time and ergonomics

- High efficiency 4 pole motors
- EcoPower boiler with EcoMode function
- Brass pump head
- Flow or Pressure activated unloader system
- Innovative design with 4 big wheels
- Easy to transport, can even be pushed/pulled across uneven surfaces
- Diesel oil tank with level sight
- As standard delivered with 10l external detergent tank (A) and space for an extra tank (B)
- Low fuel warning system
- Onboard diagnostics function

The MH 4M series takes mid-range hot water high pressure washers to a new level, meeting the latest productivity demands in the market. The MH 4M is equipped with our industrial NA5 pump with 3 ceramic pistons and a high efficiency 4 pole motor. And the flow activated control system improves user comfort and handling as well as overall machine reliability.



TECHNICAL DATA	MH 4M- 130/720 FA	MH 4M- 180/860 FA	MH 4M- 180/860 FAL	MH 4M- 200/960 FA	MH 4M- 200/960 FAX	MH 4M- 210/1000 PAX	MH 4M- 220/1000 FA	MH 4M- 220/1000 FAX
Recommended avg. hours of use per day	5	5	5	5	5	5	5	5
Pump pressure (bar/MPa)	130/13	180/18	180/18	200/20	200/20	210/21	220/22	220/22
Cleaning impact (kg/force)	3	4.3	4.3	5.1	5.1	5.5	5.6	5.6
Water flow Qmax/Qiec (l/h)	720/660	860/790	860/790	960/890	960/890	1000/940	1000/940	1000/940
Water temperature (water/steam) (°C)	90/150	90/150	90	90/150	90/150	90/150	90/150	90/150
Max. inlet temperature (°C)	40	40	40	40	40	40	40	40
Fuel consumption at ΔT=45°C (kg/h)	2.9	3.5	3.5	3.9	3.9	4.1	4.1	4.1
Fuel tank (I)	15	15	15	15	15	15	15	15
Length x width x height (mm)	1010x700x1016	1010x700x1016	1010x700x1016	1010x700x1016	1010x700x1016	1010x700x1016	1010x700x1016	1010x700x1016
Weight (kg)	141	133	133	142	142	149	142	149
El cable (m)	5	5	5	5	5	5	5	5
Nozzle size	.0435	.0435	.0435	.0475	.0475	.0475	.0475	.0475
FEATURES								
Hose reel					•	•		•
Pump oil warning system	•	•		•	•	•	•	•
Service indicator	•	•	•	•	•	•	•	•
Delayed automatic start stop	•	•	•	•	•	•	•	•
2 x detergent injector	•	•		•	•	•	•	•
Water flow regulation	•	•		•	•	•	•	•
Fuel sight from outside	•	•	•	•	•	•	•	•
STANDARD EQUIPMENT								
NILFISK BA VALVE COMP. GARDENA	106411177	106411177		106411177	106411177		106411177	106411177
ERGO COUPLING KIT	101119496	101119496	101119496	101119496	101119496	101119496	101119496	101119496
HOSE NOZZLE 20R3/4	61369	61369	61369	61369	61369	61369	61369	61369
HOSE DN8 1 WIRE 10M W.ERGO FEMALE COUPL.	101405770	101405770	101405770	101405770			101405770	
HOSE DN8 1 WIRE 15M W.ERGO FEMALE COUPL.					301001100	301001100		301001100
HP-HOSE DN8X15M QC 3/8 NILFISK HW					101406102	101406102		101406102
HOSE REEL NILFISK ACCESSORY					106403184	106403184		106403184
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122	106403122	106403122	106403122	106403122	106403122	106403122
TORNADO PLUS 1000 BEND W/O NOZZLE				106403011	106403011	106403011	106403011	106403011
UNIVERSAL PLUS LANCE 940 BEND W/O NOZZ	106403036	106403036	106403036					
NOZZLE 0435 INDICATION RING BLUE	101119739	101119739	101119739					
TORNADO NOZZLE 0475				301150005	301150005	301150005	301150005	301150005
WATER FILTER COMPLETE	107144272	107144272		107144272	107144272	107144272	107144272	107144272
ITEM NO.	107146915	107146917	107146916	107146920	107146922	107146912	107146938	107146940

## MH 5M - Medium mobile hot water







### High performance, long life & optimal maneuverability

- EcoPower boiler with EcoMode function
- EcoPower boiler >92% efficiency giving reduced fuel costs
- Brass pump head
- 3 ceramic pistons
- Flow or Pressure activated unloader system
- Innovative design with 4 big wheels
- Easy to transport, can even be pushed/pulled across uneven surfaces
- Oil tank and oil sight
- Low pump oil warning system
- Low fuel warning system
- Onboard diagnostics function

The MH 5M series offers high cleaning efficiency and low running costs via optimal cleaning and heating performance. It is the ideal hot water unit for segments such as automotive and transport, farming and industry.



TECHNICAL DATA	MH 5M-200/960 FA	MH 5M-200/960 FAX	MH 5M-210/1100 FA	MH 5M-210/1100 FAX	MH 5M-210/1100 PAX
Recommended avg. hours of use per day	5	5	5	5	5
Pump pressure (bar/MPa)	200/20	200/20	210/21	210/21	210/21
Cleaning impact (kg/force)	5.1	5.1	6.1	6.1	6.1
Water flow Qmax/Qiec (I/h)	960/900	960/900	1100/1050	1100/1050	1100/1050
Water temperature (water/steam) (°C)	90/150	90/150	90/150	90/150	90/150
Max. inlet temperature (°C)	40	40	40	40	40
Fuel consumption at ΔT=45°C (kg/h)	3.9	3.9	4.7	4.7	4.7
Fuel tank (l)	30	30	30	30	30
Length x width x height (mm)	1188x700x1020	1188x700x1020	1188x700x1020	1188x700x1020	1188x700x1020
Weight (kg)	171	174	174	179	179
El cable (m)	5	5	5	5	5
Nozzle size	.0475	.0475	.0550	.0550	.0550
FEATURES					
EcoPower boiler-high efficiency	•	•	•	•	•
Hose reel		•		•	•
Pump oil warning system	•	•	•	•	•
Service indicator	•	•	•	•	•
Automatic on/off and delayed action	•	•	•	•	•
Flame sensor	•	•	•	•	•
STANDARD EQUIPMENT					
ERGO COUPLING KIT	101119496	101119496	101119496	101119496	101119496
HOSE NOZZLE 20R3/4	61369	61369	61369	61369	61369
HOSE DN8 1 WIRE 10M W.ERGO FEMALE	101405770		101405770		
COUPL HOSE DN8 1 WIRE 20M W.ERGO FEMALE COUPL		301001101		301001101	301001101
HOSE REEL NILFISK ACCESSORY		106403184		106403184	106403184
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122	106403122	106403122	106403122
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010	106403010	106403010	106403010
NOZZLE 0550 INDICATION RING NEONGREEN			101119743	101119743	101119743
TORNADO NOZZLE 0475	301150005	301150005			
WATER FILTER COMPLETE	107144272	107144272	107144272	107144272	107144272
ITEM NO.	107146948	107146947	107146955	107146953	107146950

# MH 5M E - Medium mobile hot water







### Electrically heated hot water for exhaust gas free heating

- Pollution free electrical heating
- Precise temperature control and fast heating effect
- 1450 rpm motor with low noise level
- QuickService concept reduces maintenance costs
- Easy to use control panel, all controls in one place
- Ergonomicaccessory system for additional user comfort
- Max. Inlet temperature 60°C

The ergonomic and easy to use MH design is now adapted to an electrical heated hot water unit. Ideal for use in areas where exhaust gases must be avoided, the MH 5M E offers pollution free hot water cleaning.



TECHNICAL DATA	MH 5M 180/800 PA	MH 5M 180/800 PA
Recommended avg. hours of use per day	5	5
Pump pressure (bar/MPa)	180/18	180/18
Cleaning impact (kg/force)	4.0	4.0
Water flow Qmax/Qiec (I/h)	800/740	800/740
Max. inlet temperature (°C)	60	60
Length x width x height (mm)	1188x700x1045	1188x700x1045
Weight (kg)	125	131
El cable (m)	5	5
Nozzle size	.0400	.0400
FEATURES		
SilentPower - 1450 rpm motor	•	•
QuickService - innovative concept	•	•
Ergo accessory system	•	•
Electrical heating system	•	•
Wdk dual detergent injector	•	•
Mobile	•	•
STANDARD EQUIPMENT		
ERGO COUPLING KIT	101119496	101119496
HOSE DN8 1 WIRE 10M W.ERGO FEMALE	101405770	101405770
COUPL. ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122
UNIVERSAL PLUS LANCE 1080 BEND W/O NOZZ		106403035
NOZZLE 0400 INDICATION RING METAL GREY	101119738	101119738
WATER FILTER COMPLETE	107144272	107144272
ITEM NO.	107146865	107146866

# MH 6P – Large mobile hot water







### Tough and efficient - for heavy duty applications

- EcoPower boiler with EcoMode function
- EcoPower boiler >92% efficiency giving reduced fuel costs
- Brass pump head
- 4 ceramic pistons
- Flow activated unloader system
- Innovative design with 4 big wheels
- Easy to transport, can even be pushed/pulled across uneven surfaces
- Oil tank and oil sight
- Low pump oil warning system Low fuel warning system
- Onboard diagnostics function
- Easy to use control panel

The MH 6P series features machines with high power & pressure for tough cleaning tasks. Ideal for heavy use in agriculture, construction, transport or industrial



TECHNICAL DATA	MH 6P-175/1250 FA	MH 6P-175/1250 FAX	MH 6P-200/1300 FA	MH 6P-200/1300 FAX
Recommended avg. hours of use per day	6	6	6	6
Pump pressure (bar/MPa)	175/17.5	175/17.5	200/20	200/20
Cleaning impact (kg/force)	6.2	6.2	6.9	6.9
Water flow Qmax/Qiec (l/h)	1250/1150	1250/1150	1300/1200	1300/1200
Water temperature (water/steam) (°C)	90/150	90/150	90/150	90/150
Max. inlet temperature (°C)	40	40	40	40
Fuel consumption at ΔT=45°C (kg/h)	5.4	5.4	5.3	5.3
Fuel tank (I)	30	30	30	30
Length x width x height (mm)	1188x700x1020	1188x700x1020	1188x700x1045	1188x700x1045
Weight (kg)	180	188	198	207
El cable (m)	5	5	5	5
Nozzle size	.0750	.0750	.0680	.0680
FEATURES				
EcoPower boiler-high efficiency	•	•	•	•
Hose reel		•		•
Pump oil warning system	•	•	•	•
Service indicator	•	•	•	•
Automatic on/off and delayed action	•	•	•	•
Flame sensor	•	•	•	•
STANDARD EQUIPMENT				
ERGO COUPLING KIT	101119496	101119496	101119496	101119496
HOSE NOZZLE 20R3/4	61369	61369	61369	61369
HP Hose DN10 10000 AGR-AGR	6101766		6101766	
HP Hose DN10 20000 AGR-AGR		1402072		1402072
HOSE REEL NILFISK ACCESSORY		106403184		106403184
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122	106403122	106403122
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010	106403010	106403010
NOZZLE 0680 INDICATION RING GREY			101119747	101119747
NOZZLE 0750 INDICATION RING RED	101119749	101119749		
WATER FILTER COMPLETE	107144272	107144272	107144272	107144272
ITEM NO.	107146960	107146963	107146961	107146964

# MH 7P – Large mobile hot water





TECHNICAL DATA

### Heavy duty and efficient hot water cleaning for intense use

- EcoPower boiler with EcoMode function
- EcoPower boiler >92% efficiency giving reduced fuel costs
- Brass pump head
- 4 ceramic pistons
- Flow activated unloader system
- Innovative design with 4 big wheels
- Easy to transport, can even be pushed/pulled across uneven surfaces
- Oil tank and oil sight

BALL 7D 400/4360 FA

- Low pump oil warning system
- Low fuel warning system
- Onboard diagnostics function
- Easy to use control panel

MH 7P is the optimal solution for heavy duty, industrial cleaning tasks. The 4 piston pump and high power boiler system offer unbeatable cleaning effect and long lifetime. The flow activated unloader system adds a new level of reliability and comfort.



BALL 3D 400/4360 FAV

TECHNICAL DATA	MH 7P-180/1260 FA	MH 7P-180/1260 FAX
Recommended avg. hours of use per day	7	7
Pump pressure (bar/MPa)	180/18	180/18
Cleaning impact (kg/force)	6.3	6.3
Water flow Qmax/Qiec (I/h)	1260/1170	1260/1170
Water temperature (water/steam) (°C)	90/150	90/150
Max. inlet temperature (°C)	40	40
Fuel consumption at ΔT=45°C (kg/h)	5.3	5.3
Fuel tank (I)	30	30
Length x width x height (mm)	1188x700x1045	1188x700x1045
Weight (kg)	195	204
El cable (m)	5	5
Nozzle size	.0680	.0680
FEATURES		
EcoPower boiler-high efficiency	•	•
Hose reel		•
Pump oil warning system	•	•
Service indicator	•	•
Automatic on/off and delayed action	•	•
Flame sensor	•	•
STANDARD EQUIPMENT		
ERGO COUPLING KIT	101119496	101119496
HOSE NOZZLE 20R3/4	61369	61369
HP Hose DN10 10000 AGR-AGR	6101766	
HP Hose DN10 20000 AGR-AGR		1402072
HOSE REEL NILFISK ACCESSORY		106403184
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010
NOZZLE 0680 INDICATION RING GREY	101119747	101119747
WATER FILTER COMPLETE	107144272	107144272
ITEM NO.	107146980	107146982

# MH 8P – Large mobile hot water







# Tough and efficient - for heavy duty applications requiring high water

- EcoPower boiler with > 92% efficiency for reduced fuel cost 1450 RPM motor High flow pump
- Easy to use control panel
- Steel frame and chassis
- Quick service concept reduces maintenance costs
- Optimal machine protection against low fuel, low pump oil. Includes flame sensor and exhaust gas temperature sensor.
- Diagnostics system
- 2 way chemical dosing system with automatic flush system
- Max. Inlet temperature 40°C

The high power MH 8P combines high pressure and high water flow for routine cleaning of large amounts of dirt in the agriculture, construction, transport or industrial segments. The MH 8P combines high cleaning effect with high rinsing and flushing effect.



TECHNICAL DATA	MH 8P-180/2000 FA	MH 8P-180/2000 FAX
Recommended avg. hours of use per day	7	7
Pump pressure (bar/MPa)	180/18	180/18
Cleaning impact (kg/force)	10.6	10.6
Water flow Qmax/Qiec (I/h)	2000/1950	2000/1950
Water temperature (water/steam) (°C)	70/150	70/150
Max. inlet temperature (°C)	40	40
Fuel consumption at ΔT=45°C (kg/h)	8.8	8.8
Fuel tank (I)	30	30
Length x width x height (mm)	1188x700x1045	1188x700x1045
Weight (kg)	219	227
El cable (m)	5	5
Nozzle size	.1200	.1200
STANDARD EQUIPMENT		
ERGO COUPLING KIT	101119496	101119496
HP-HOSE DN12X10M QC 3/8 AG NILFISK HW	101406186	
HP-HOSE DN12X15M QC 3/8 AG NILFISK HW		101406187
HOSE REEL NILFISK ACCESSORY		106403184
HIGH FLOW SPRAY HANDLE	106404530	106404530
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010
NOZZLE 1200 INDICATION RING CARAMELE	101119758	101119758
WATER FILTER COMPLETE	107144272	107144272
ITEM NO.	107146970	107146965

# SC UNO 4M – Stationary cold water





### A portable and stationary mounted unit all in one

- Powered by 1450 rpm high efficiency motor (50 Hz)
- Brass pump head
- 3 ceramic coated pistons
- Pressure activated unloader system
- Enclosed oil system
- Robust, steel transport handle
- The unit can operate both in vertical and in horizontal position
- Light weight (compared to competition)
- Robust steel handle for easy transport

The SC UNO 4M PS is both a stationary and a portable unit. It is simple and intuitive to use and a cost effective fixed installation on the wall or used as a portable model, carried from site to site to different working places. Delivered with all accessories for immediate use. Designed for heavy duty cleaning tasks the SC UNO 4M PS serie is a reliable choice for light agriculture, building and construction and automotive areas, etc. The key objective is to deliver one unique versatile machine for professionals with different demands as to cleaning environment.



TECHNICAL DATA	SC UNO 4M-140/620 PS	SC UNO 4M-160/720 PS
Recommended avg. hours of use per day	3	3
Pump pressure (bar/MPa)	140/14	160/16
Cleaning impact (kg/force)	2.7	3.4
Water flow Qmax/Qiec (I/h)	620/560	720/660
Max. inlet temperature (°C)	60	60
Length x width x height (mm)	480x240x340	480x240x340
Weight (kg)	34	34
El cable (m)	5	5
Nozzle size	.0340	.0400
FEATURES		
Robust steel chassis and frame	•	•
Ceramic coated pistons	•	•
Oil Sight outside Cabinet	•	•
Wall mountable	•	•
STANDARD EQUIPMENT		
ERGO COUPLING KIT	101119496	101119496
GARDENA COMPATIBLE MALE 3/4" ACCESSORY	106404529	106404529
10 M WIRE HOSE DN6	301002275	301002275
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122
FLEXOPOWER PLUS 960 BEND W/O NOZZLE	106402282	106402282
NOZZLE 0340 INDICATION RING VIOLET	101119735	
NOZZLE 0400 INDICATION RING METAL GREY		101119738
ITEM NO.	107340500	107340501

# SC UNO 5M, 6P & 7P - Stationary cold water







#### Stationary 1-pump high pressure washers for flexible cleaning

- NA6, C3 and new NA6+ high-quality heavy industrial motor pumps with
- brass pump heads
- 1450 rpm; 4 full ceramic pistons and double roller bearings
- The industrial pumps make it possible to feed the units with hot inlet water from 70°C (with break tank) to 85°C (direct feed) for max. cleaning efficiency
- Powered by 1450 rpm (50 Hz) closed industrial motor
- NA5.2 reinforced wobble disc pump
- 3 ceramic pistons and brass pump head
- Foam sprayer for use of detergent on SC UNO 5M L
- · Accessory kit for immediate plug & play use
- Low pump oil safety function and warning lamp
- Hour counter and service warning lamp
- NEO control system; enabling optional functions: Remote control, low water safety etc.

The SC UNO range offer models from 5M and 5M L, to 6P, 7P and 8P. Industrial stationary cold high pressure water washers with new innovative steps to meet the specific cleaning needs and designed to meet heavy-duty cleaning challenges with convincing performances.

These machines offer a variety of configurations according to user situations – at an attractive price level. Furthermore, intuitive user functions and the opportunity to customize the machines with equipment suited for your environment ensure high productivity.



TECHNICAL DATA	SC UNO 5M- 200/1050	SC UNO 5M- 200/1050 L	SC UNO 6P- 170/1610	SC UNO 7P- 180/1200	SC UNO 8P- 160/2500	SC UNO 8P- 180/2000
Recommended avg. hours of use per day	5	5	7	8		
Pump pressure (bar/MPa)	200/20	200/20	170/17	180/18	160/16	180/18
Cleaning impact (kg/force)	5.5	5.5	7.9	5.9	12.3	9.8
Water flow Qmax/Qiec (I/h)	1050/960	1050/960	1600/1500	1200/1080	2500/2400	2000/1800
Max. inlet temperature (°C)	60	60	80	85	80	80
Length x width x height (mm)	355x860x560	355x860x560	355x860x560	355x860x560	355x860x560	355x860x560
Weight (kg)	74	74	84	81	91	91
El cable (m)	5	5	5	5	5	5
Nozzle size	.0500	.0500	.0900	.0640	.1500	.1200
FEATURES						
Pump oil warning system	•	•	•	•	•	•
Intelligent pump control system	•		•	•	•	•
Foam Sprayer		•				
Wall mountable	•	•	•	•	•	•
Foam Cabinet, EPP	•	•	•	•	•	•
Motor on-off lamp	•		•	•	•	•
Service warning lamp	•		•	•	•	•
STANDARD EQUIPMENT						
ERGO COUPLING KIT	101119496	101119496	101119496	101119496	101119496	101119496
QUICK COUPLING 3/4 W/GASKET	1602945	1602945	1602945	1602945	1602945	1602945
HOSE DN8 1 WIRE 10M W.ERGO FEMALE COUPL	101405770	101405770				
HP HOSE DN10 10000 AGR-AGR			6101766	6101766		
HP HOSE DN10 10000 AGR-QC						101406220
HP-HOSE DN12X10M QC 3/8 AG NILFISK HW					101406186	
ergo 2000 standard w. hose swivel	106403122	106403122	106403122	106403122		
HIGH FLOW SPRAY HANDLE					106404530	106404530
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010	106403010	106403010	106403010	106403010
NOZZLE 0500 INDICATION RING YELLOW	101119741	101119741				
NOZZLE 0640 INDICATION RING GREEN				101119745		
NOZZLE 0900 INDICATION RING BROWN			101119752			
NOZZLE 1200 INDICATION RING CARAMELE						101119758
NOZZLE 1500 INDICATION RING OLIVE					101119762	
ITEM NO.	107340512	107340510	107340521	107340541	107340531	107340530

# SC DUO 6P & 7P – Stationary cold water





### Stationary 2-pump high pressure washers for heavy cleaning tasks

- NA6, C3 and new NA6+ high-quality motor pumps with brass pump heads
- 1450 rpm; 4 full ceramic pistons and double roller bearings
- Working pressure up to 180 bar
- Water flow up to 2x2500 l/h
- 70°- 85°C hot water inlet for max. cleaning efficiency
- · Innovative hard foam cabinet
- Built on powder-coated steel frame
- Foam cabinet reduces the noise level
- Incl. Low pump oil warning lamps, Service warning lamp, Hour counter, Low pump oil safety

Designed for large cleaning tasks SC DUO 6P, 7P & 8P are ideal for agriculture with milking sheds, sties, and stables. Food and pharma industry with processing equipment, conveyors, and tanks. Shipping and industry with ship decks, bulkheads, and industrial equipment. Even oil and grease can be removed easily thanks to the hot water inlet..

Offers you the flexibility of being either one user – or two working together. Cleaning efficiency is maximized by a 4-piston long-life motor pump accepting both cold and hot water up to  $85^{\circ}$ C.



TECHNICAL DATA	SC DUO 6P-170/3220	SC DUO 7P-180/2400	SC DUO 8P-160/5000	SC DUO 8P-180/4000	
Recommended avg. hours of use per day	5	6	7	7	
Pump pressure (bar/MPa)	170/17	180/18	160/16	180/18	
Cleaning impact (kg/force)	15.8	12.1	23.8	19.5	
Water flow Qmax/Qiec (I/h)	3220/3000	2400/2240	5000/4800	4000/3600	
Max. inlet temperature (°C)	80	85	80	80	
Length x width x height (mm)	355x860x1000	355x860x1000	355x860x1000	355x860x1000	
Weight (kg)	180	160	212	212	
Nozzle size	.0900	.0640	.1500	.1200	
Number of pumps	2	2	2	2	
FEATURES					
Hour Meter	•	•	•	•	
Pump oil warning system	•	•	•	•	
Service indicator	•	•	•	•	
Intelligent pump control system	•	•	•	•	
Foam Cabinet, EPP	•	•	•	•	
Motor on-off lamp	•	•	•	•	
Service warning lamp	•	•	•	•	
STANDARD EQUIPMENT					
NIPPLE F/QUICK COULING 3/8 SS	1603101	1603101	1603101	1603101	
QUICK COUPLING 3/4 W/GASKET	1602945	1602945		1602945	
ITEM NO.	107340600	107340620	107340611	107340610	

### SC DELTA 6P - Stationary cold water







#### Stationary high pressure washer for multiple users

- 3,4 or 6 pumps for up to 12 users at one time
- Colour coded lances allow mixed use of low, medium and high pressure, detergent application
- Inlet water of up to 85°C into break tank and 70°C through pumps (80° as optional)
- Stainless steel design with high level of accessibility and serviceability
- Machine continues to run whilst individual pumps can be removed for service
- Intelligent start stop function for motor pumps depending on real-time demand from users
- Line pressures available from 80 to 160 bar
- Touch screen control panel & advanced diagnostics system

The SC DELTA is a multi-pump, multi-pressure system encompassing 3, 4 or 6 pumps - and allowing up to 12 people to work at any time. A stationary cold water unit for the heaviest cleaning applications in industry, slaughter houses, food & beverage industry, ship & off shore industry and large truck wash areas.



TECHNICAL DATA	SC DELTA 6P 160/4500-3 EU SC DELTA 6P 160/6000-4 EU		SC DELTA 6P 160/9000-6 EU
	7		
Recommended avg. hours of use per day	7	7	7
Pump pressure (bar/MPa)	160/16	160/16	160/16
Cleaning impact (kg/force)	22.4	29.7	43.9
Water flow Qmax/Qiec (I/h)	4380/4500	5820/6000	8580/9000
Max. inlet temperature (°C)	70	70	70
Length x width x height (mm)	970 x 1050 x 1800	970 x 1050 x 1800	970 x 1050 x 1800
Weight (kg)	349	408	526
Nozzle size	Min0350	Min0350	Min0350
Number of pumps	3	4	6
FEATURES			
Stainless steel frame	•	•	•
Automatic standby	•	•	•
QuickService - innovative concept	•	•	•
Diagnostic system	•	•	•
Intelligent pump control system	•	•	•
Multi pressure lance system for low, medium or high pressure use	•	•	•
Finger touch control panel	•	•	•
ITEM NO.	107342000	107342002	107342005

# SC DELTA 8P - Stationary cold water







#### Stationary high pressure washer for multiple users

- 3,4 or 6 pumps for up to 12 users at one time
- Colour coded lances allow mixed use of low, medium and high pressure, detergent application
- Inlet water of up to 85°C into break tank and 70°C through pumps (80° as optional)
- Stainless steel design with high level of accessibility and serviceability
- Machine continues to run whilst individual pumps can be removed for service
- Intelligent start stop function for motor pumps depending on real-time demand from users
- Line pressures available from 80 to 100 bar
- Touch screen control panel & advanced diagnostics system

The SC DELTA is a multi-pump, multi-pressure system encompassing 3, 4 or 6 pumps - and allowing up to 12 people to work at any time. A stationary cold water unit for the heaviest cleaning applications in industry, slaughter houses, food, pharma & beverage industries. In general where a high water flow is needed.



TECHNICAL DATA	SC DELTA 8P 100/10000-4 400/3/50 EU	SC DELTA 8P 100/15000-6 400/3/50 EU	O SC DELTA 8P 100/7500-3 400/3/50 EU	
Recommended avg. hours of use per day	7	7	7	
Pump pressure (bar/MPa)	100/10	100/10	100/10	
Cleaning impact (kg/force)	38.3	58.7	28.4	
Water flow Qmax/Qiec (I/h)	10000/9480	15000/14520	7500/7020	
Max. inlet temperature (°C)	70	70	70	
Length x width x height (mm)	970 x 1050 x 1800	970 x 1050 x 1800	970 x 1050 x 1800	
Weight (kg)	408	526	349	
Nozzle size	Mix	Mix	Mix	
Number of pumps	4	6	3	
FEATURES				
Stainless steel frame	•	•	•	
QuickService - innovative concept	•	•	•	
Diagnostic system	•	•	•	
Intelligent pump control system	•	•	•	
Multi pressure lance system for low, medium or high pressure use	•	•	•	
NA6 - 4 ceramic piston pump	•	•	•	
Stainless steel cabinet	•	•	•	
ITEM NO.	107342004	107342007	107342001	

# SH SOLAR D – Stationary hot water



#### Diesel powered hot water high pressure washers

- Expandable control technology with PLC and special options
- Automatic diagnosis and fault finding
- High efficiency, low cost heating system with EcoPower boiler system
- Galvanised steel frame and cabinet
- Reduced running and service costs
- Compact and easy to install

Diesel powered stationary heating for maximum efficiency in the automotive, industrial and shipping sectors where the cleaning is always made at one particular site indoors - or where the machine should be kept in a technical room away from the cleaning site with pressurized water transported by pipeline or long hose



TECHNICAL DATA	SH SOLAR 7P-170/1200 D	SH SOLAR 7P-170/1200 D SH SOLAR 7P-170/1200 DSS	
Recommended avg. hours of use per day	7	7	5
Pump pressure (bar/MPa)	170/17	170/17	180/18
Cleaning impact (kg/force)	5.8	5.8	10.3
Water flow Qmax/Qiec (I/h)	1200/1110	1200/1110	2000/1900
Max. inlet temperature (°C)	30	30	30
Water temperature (water/steam) (°C)	99	99	70
Fuel consumption at ΔT=45°C (kg/h)	5.4	5.4	8.9
Length x width x height (mm)	700x900x1077	700x900x1077	700x900x1077
Weight (kg)	215	215	232
El cable (m)	4	4	4
Nozzle size	.0680	.0680	.1100
FEATURES			
EcoPower boiler-high efficiency	•	•	•
Automatic start/stop	•	•	•
1450 rpm motor	•	•	•
Galvanised steel frame	•	•	•
PLC and expandable control electronics	•	•	•
Auto fault finding	•	•	•
Water brake tank	•	•	•
ITEM NO.	107370070	107370077	107370080

# SH SOLAR E – Stationary hot water



#### **Electrically powered high pressure washers**

- Expandable control technology with PLC and special options
- Automatic diagnosis and fault finding
- Pollution free, heating system
- Galvanised steel frame and cabinet
- Reduced running and service costs
- Large 119 L heating tank for excellent heating capacity
- Available up to 54 kW heating
- C3 longlife pump with 4 ceramic pistons

Electrical powered stationary heating for maximum efficiency in the automotive, industrial, food and shipping sectors. Electrical heating is exhaust gas and pollution free.



TECHNICAL DATA	SH SOLAR 7P-135/875 E18	SH SOLAR 7P-170/1200 E18	SH SOLAR 7P-170/1200 E36	SH SOLAR 7P-170/1200 E54
Recommended avg. hours of use per day	7	7	7	7
Pump pressure (bar/MPa)	135/13.5	170/17	170/17	170/17
Cleaning impact (kg/force)	3.8	5.8	5.8	5.8
Water flow Qmax/Qiec (I/h)	875/810	1200/1110	1200/1110	1200/1110
Max. temperature (°C)	85	85	85	85
Max. inlet temperature (°C)	85	85	85	85
Water temperature, ΔT at full flow (°C)	19	14	28	42
Length x width x height (mm)	670x900x1077	670x900x1077	670x900x1077	670x900x1077
Weight (kg)	150	155	155	156
Nozzle size	.0530	.0680	.0680	.0680
FEATURES				
Electrical heating system	•	•	•	•
Automatic start/stop	•	•	•	•
1450 rpm motor	•	•	•	•
Galvanised steel frame	•	•	•	•
PLC and expandable control electronics	•	•	•	•
Auto fault finding	•	•	•	•
Water brake tank	•	•	•	•
ITEM NO.	107370260	107370270	107370274	107370276

# SH SOLAR G – Stationary hot water



#### Gas powered stationary hot water high pressure washers

- Expandable control technology with PLC and special options
- Automatic diagnosis and fault finding
- Efficient gas heating systems
- Galvanised steel frame and cabinet
- Reduced running and service costs
- Compact and easy to install

Gas powered stationary heating for maximum efficiency in the automotive, industrial sectors or other sites possessing a gas supply line, avoiding need to provide diesel fuel supply.



TECHNICAL DATA	SH SOLAR 5M-150/1020 G	SH SOLAR 7P-170/1200 G
Recommended avg. hours of use per day	5	7
Pump pressure (bar/MPa)	150/15	170/17
Cleaning impact (kg/force)	4.5	5.8
Water flow Qmax/Qiec (I/h)	1020/900	1200/1110
Max. temperature (°C)	99	99
Max. inlet temperature (°C)	30	30
Water temperature, ΔT at full flow (°C)	85	85
Length x width x height (mm)	700x900x1100	700x900x1100
Weight (kg)	186	214
Nozzle size	.0550	.0680
FEATURES		
Automatic start/stop	•	•
1450 rpm motor	•	•
Galvanised steel frame	•	•
PLC and expandable control electronics	•	•
Gas burner and coil	•	•
Auto fault finding	•	•
Water brake tank	•	•
ITEM NO.	107370450	107370470

# **SH TRUCK – Stationary hot water**



### Efficient outdoor cleaning of your vehicle fleet

- Stainless steel robust design against corrosion
- EcoPower boiler for reduced fuel consumption costs
- SilentPower, low noise level with 1450 rpm motor pump units
- Simple control panel with only 4 buttons
- Ergonomic accessories for added user experience
- Internal frost protection down to minus 20°C
- Simple control panel
- Compact design

The SH TRUCK is a simple robust and corrosion proof stationary unit for permanent outdoor placement. Enabling constant cleaning of trucks, vans, commercial and constrution vehicles, the SH TRUCK is frost protected for use even in winter.



TECHNICAL DATA	SH TRUCK 5M-180/970	SH TRUCK 7P-175/1260
Recommended avg. hours of use per day	5	7
Pump pressure (bar/MPa)	180/18	175/17.5
Cleaning impact (kg/force)	4.9	6.3
Water flow Qmax/Qiec (l/h)	970/930	1260/1170
Max. inlet temperature (°C)	30	30
Water temperature (water/steam) (°C)	90/150	90/150
Fuel tank (I)	33	33
Length x width x height (mm)	1025x715x1670	1025x715x1670
Weight (kg)	227	262
Nozzle size	.0550	.0680
FEATURES		
Stainless steel frame	•	•
Automatic standby	•	•
QuickService - innovative concept	•	•
Wdk dual detergent injector	•	•
Internal heater and insulation for frost protection	•	•
Flame sensor	•	•
Water brake tank	•	•
STANDARD EQUIPMENT		
ERGO COUPLING KIT	101119496	101119496
HOSE NOZZLE 20R3/4	61369	61369
HP Hose DN10 10000 AGR-AGR	6101766	6101766
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010
NOZZLE 0550 INDICATION RING NEONGREEN	101119743	
NOZZLE 0680 INDICATION RING GREY		101119747
ITEM NO.	107370830	107370810

### **SH AUTO 5M – Stationary hot water**





#### Innovative technology for quicker payback time on self service washes

- Low wear and tear and service requirements reduce maintenance costs
- Inovative frequency modulated technology
- Low daily run costs through reduced fuel, water and electrical consumption
- Available with steel and stainless steel coils in diesel fired models for areas with hard or soft water
- Available with electrical heating system for pollution free cleaning
- Ergonomical and pressure relieved accessories for extra comfort in use
- Low noise levels

The SH AUTO 5M is a range of stationary self service wash units equipped with innovative frequency modulated motor technology. Ideal solutions for equipping service stations or car dealerships with a self service wash site with quick payback on investment.



TECHNICAL DATA	SH AUTO 5M-100/500 DSS	SH AUTO 5M-100/500 E
Recommended avg. hours of use per day	8	8
Pump pressure (bar/MPa)	100/10	100/10
Cleaning impact (kg/force)	2	2
Water flow Qmax/Qiec (I/h)	500/500	500/500
Max. inlet temperature (°C)	30	30
Water temperature (water/steam) (°C)	20-60	20-60
Fuel consumption at ΔT=45°C (kg/h)	2.6	
Fuel tank (I)	33	
Length x width x height (mm)	725x1090x1635	725x1090x1635
Weight (kg)	204	182
Nozzle size	.0370	.0370
FEATURES		
EcoPower boiler-high efficiency	•	
Electrical heating system		•
Internal heater and insulation for frost	•	•
protection Diesel version	•	
Stainless steel boiler	•	
Delayed automatic start stop	•	•
Stainless steel cabinet	•	•
STANDARD EQUIPMENT		
HOSE NOZZLE 20R3/4	61369	61369
HIGH PRESSURE HOSE DN6X8200MM	101405641	101405641
WINTER GUN 12 BAR	106402243	106402243
UNIVERSAL PLUS 1080 BENT 170 F. BRUSH	106403037	106403037
NOZZLE 0370 INDICATION RING BRONZE	101119737	101119737
SELF-SERVICE BRUSH AUTO	106402241	106402241
ITEM NO.	107370882	107370884

# MC PE / DE – Pressure washers – petrol driven







#### Robust and powerful petrol driven cold water high pressure washers

- Robust long life pumps with ceramic pistons
- Robust and maniable design
- Wide range of performance levels with high pressure levels
- Lightweight yet maniable design
- Ergo accessory concept

The MC PE/DE range is ideal for use in areas where electrical power may not at all be available or not be string enough to allow high power cleaning. Self priming and suction ability also means that water can be drawn from a tank or river. Ideal for use in building and construction, rental, agricultural segments.







TECHNICAL DATA	MC 2C-160/740 PET	MC 3C 180/770 PET	MC 4C 220/770 PEXT	MC 5C 230/940 PE	MC 5C 280/1000 PE
Pump pressure (bar/MPa)	160	180	210	240	280
Cleaning impact (kg/force)	3.5	3.8	4.1	5.4	6.5
Water flow Qmax/Qiec (I/h)	670/740	690/750	690/770	850/940	950/1000
Pump (RPM)	3400	3400	3400	3400	3400
Max. inlet temperature (°C)	60	60	60	60	60
Power source diesel					
Power source petrol	Kohler SH265	Kohler CH270	Honda GX200	Honda GX270	Honda GX390
Ceramic pistons				3	3
Length x width x height (mm)	533x521x935	533x521x935	546x615x1021	546x615x1021	668x572x1021
Weight (kg)	30.2	32.2	39.9	44.8	52
Nozzle size	.0370	.0400	.0340	.0370	.0370
Motor power hp (kW)	6.5 (4.7)	7 (5.2)	5.5 (4.1)	9 (6.6)	13 (9.5)
Recommended avg. hours of use per day	2	3	4	5	5
FEATURES					
Stainless steel pistons	•				
Ceramic coated pistons		•	•		
Ceramic pistons				•	•
Direct drive	•	•	•	•	•
Reduction Gear					
Flat Free Wheels	•	•	•	•	•
STANDARD EQUIPMENT					
ERGO COUPLING KIT	101119496	101119496	101119496	101119496	101119496
GARDENA COMPATIBLE MALE 3/4" ACCESSORY	106404529	106404529	106404529	106404529	106404529
10 M WIRE HOSE DN6	301002275	301002275			
HOSE DN6 15 M 1W - 3/8-QC			6528613		
HOSE DN8 1 WIRE 10M W.ERGO FEMALE COUPL.				101405770	101405770
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122	106403122	106403122	106403122
TORNADO PLUS 1000 BEND W/O NOZZLE					106403011
FLEXOPOWER PLUS 960 BEND W/O NOZZLE			106402282	106402282	
TURBOHAMMER PLUS 950 STRAIGHT W12 0350			106403077		
4-IN-1 LANCE INCL 0370 ALUMINUM HEAD	106408252				
4-IN-1 LANCE INCL 0400 ALUMINUM HEAD		106408253			
NOZZLE 0340 INDICATION RING VIOLET			101119735		
NOZZLE 0370 INDICATION RING BRONZE	101119737			101119737	101119737
NOZZLE 0400 INDICATION RING METAL GREY		101119738			
ITEM NO.	106404532	106404533	106404535	106404536	106404538

# MC PE / DE – Pressure washers – petrol driven







#### Robust and powerful petrol driven cold water high pressure washers

- Robust long life pumps with ceramic pistons
- Robust and maniable design
- Wide range of performance levels with high pressure levels
- Lightweight yet maniable design
- Ergo accessory concept

The MC PE/DE range is ideal for use in areas where electrical power may not at all be available or not be string enough to allow high power cleaning. Self priming and suction ability also means that water can be drawn from a tank or river. Ideal for use in building and construction, rental, agricultural segments.







TECHNICAL DATA	MC 5C 280/1000 PEXT	MC 5M-195/1000 DE	MC 5M 280/1100 PE	MC 7P-220/1120 PE PLUS
Pump pressure (bar/MPa)	280	195/19.5	280	220/22
Cleaning impact (kg/force)	6.5	5.3	7.1	6.1
Water flow Qmax/Qiec (I/h)	950/1000	1000/950	1040/1100	1120/1010
Pump (RPM)	3400	1650	1750	1700
Max. inlet temperature (°C)	60	60	60	80
Power source diesel		YANMAR L100 DE		
Power source petrol	Honda GX390		Honda GX390	Honda GX390
Ceramic pistons	3	3	3	4
Length x width x height (mm)	546x615x1021	750x680x850	713x572x1021	1067x686x660
Weight (kg)	60	110	61	93
Nozzle size	.0370	.0530	.0450	.0500
Motor power hp (kW)	13 (9.5)	10 (7.3)	13 (9.5)	13 (9.5)
Recommended avg. hours of use per day	5	5	6	6
FEATURES				
Pneumatic wheels				•
Ceramic pistons	•	•	•	•
Direct drive	•			•
Reduction Gear			•	
Flat Free Wheels	•		•	
STANDARD EQUIPMENT				
ERGO COUPLING KIT	101119496	101119496	101119496	101119496
GARDENA COMPATIBLE MALE 3/4" ACCESSORY	106404529		106404529	
HOSE NOZZLE 20R3/4		61369		61369
HOSE DN8 1 WIRE 10M W.ERGO FEMALE COUPL		101405770	101405770	101405770
HOSE DN8 1 WIRE 15M W.ERGO FEMALE COUPL				
HOSE DN8 1 WIRE 20M W.ERGO FEMALE COUPL	301001101			
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122	106403122	106403122
TORNADO PLUS 1000 BEND W/O NOZZLE	106403011	106403011	106403011	106403011
TURBOHAMMER PLUS 1115 STRAIGHT W12 0400	106403002			
NOZZLE 0370 INDICATION RING BRONZE	101119737			
NOZZLE 0400 INDICATION RING METAL GREY				
NOZZLE 0450 INDICATION RING LIGHT BLUE			101119740	
NOZZLE 0500 INDICATION RING YELLOW				101119741
NOZZLE 0530 INDICATION RING RED		101119742		
ITEM NO.	106404539	106174740	106404540	106174807

### MH PE / DE – Pressure washers – petrol driven



#### Total independence of electrical power and normal water sources

- EcoPower boiler with > 92% efficiency with reduced running costs
- Slow running pumps either by belt drive or by direct gear reduction
- Integrated fuel tank
- Easy to use control panel
- Ergo accessory concept
- Honda petrol motors, Yanmar or Mitsubishi diesel engines
- Mobile units or trailer mounted
- Easy transport by forklift truck
- Low pump oil safety function
- Easy oil drain from pump and motor reduce maintenance costs
- Max. Inlet temperature 40°C

MH PE/DE is a comprehensive range of petrol and diesel powered hot water models for professional use in areas where electrical source is not available. Models can also typically draw water from tanks, wells or rivers giving a high level of use autonomy. MH PE/DE are thus ideal solutions for hot water cleaning in construction and industrial segments, or by contract cleaners or public authorities.







TECHNICAL DATA	MH 5M-200/1000 DE	MH 7P-220/1120 PE	MH 7P-220/1300 DE
Pump pressure (bar/MPa)	200/20	220/22	220/22
Cleaning impact (kg/force)	5.1	6.1	7.2
Water flow Qmax/Qiec (I/h)	1000/900	1120/1010	1300/1200
Pump (RPM)	1485	1775	1630
Max. inlet temperature (°C)	40	40	40
Water temperature (water/steam) (°C)	90/150	90/150	90/150
Power source diesel	Yanmar L100		Mitsubishi S3L2
Power source Petrol		Honda GX390	
Power consumption (kW)	10 HP/7.3 kW	13 HP/9.6 kW	16 HP/11.7 kW
Fuel consumption at ΔT=45°C (kg/h)	4.7	5.6	6.8
Fuel consumption, motor (I/h)	2.2	3.5	3.5
Fuel tank (I)	Boiler 57/Motor 5.5	Boiler 57/Motor 6.1	Boiler/Motor 57
Ceramic pistons	3	4	4
Length x width x height (mm)	970x780x1000	970x780x1000	1130x910x1050
Weight (kg)	220	210	510
Nozzle size	.0450	.0500	.0640
FEATURES			
EcoPower boiler-high efficiency	•	•	•
Pump oil warning system	•	•	•
Service indicator	•	•	•
Electrical starting system	•	•	•
Thermal dump valve	•		
Flame sensor	•	•	•
Exhaust gas temperature sensor	•	•	•
STANDARD EQUIPMENT			
ERGO COUPLING KIT	101119496	101119496	101119496
HOSE NOZZLE 20R3/4	61369	61369	61369
HOSE DN8 1 WIRE 15M W.ERGO FEMALE COUPL.	301001100	301001100	
HP HOSE DN10 150DEG L15000mm			1402064
ERGO 2000 STANDARD W. HOSE SWIVEL	106403122	106403122	106403122
TORNADO PLUS 1120 BEND W/O NOZZLE	106403010	106403010	106403010
NOZZLE 0450 INDICATION RING LIGHT BLUE	101119740		
NOZZLE 0500 INDICATION RING YELLOW		101119741	
NOZZLE 0640 INDICATION RING GREEN			101119745
NOZZLE 0650 INDICATION RING LIGHT GREEN			
ITEM NO.	106239610	106239530	106239635

# MC9 – Heavy-Duty - Cold high pressure water washers





#### Agile cleaning in tight spaces

- Powerful high-pressure water application, ranging from 350 to 500 bars for cleanup of tough jobs
- Two-sided interface setup, for fast and easy overview of machine operation
- A protected water inlet, placed in a high position for easy hose mounting and dismounting
- Anti-corrosive steel frame design for reduced wear and tear in harsh marine conditions
- Large four-wheel setup for easy rollover across obstacles and moorings

From ship corridors to cargo containers, the MC 9P very high pressure washer is uniquely designed for cleaning in narrow spaces and construction sites with great efficiency.



TECHNICAL DATA	L DATA MC 9P-350/1260 400/3/50 MC 9P-350/1260 440/3/60 MC 9P-500/960 400/		MC 9P-500/960 400/3/50	3/50 MC 9P-500/960 440/3/60	
Pump pressure (bar/MPa)	360/36	360/36	500/50	500/50	
Cleaning impact (kg/force)	9.66	9.66	8.67	8.67	
Water flow (I/h)	1260	1260	960	960	
Pump (RPM)	1460	1760	1460	1760	
Max. water temperature (°C)	35	35	35	35	
Power consumption (kW)	18	18	18	18	
Voltage/phase/frequency/current (V/~/Hz/A)	400/3/50/32	440/3/60/29	400/3/50/32	440/3/60/29	
Dimensions L x W x H (mm)	1100x500x980	1100x500x980	1100x500x980	1100x500x980	
Weight (kg)	245	245	255	255	
El-cable, oil resistant (M)	16	16	16	16	
Nozzle size	1505	15045	1503	0003	
FEATURES					
Pistons/number of pistns	Ceramic / 3	Ceramic / 3	Ceramic / 3	Ceramic / 3	
Cable storage	•	•	•	•	
Big wheels and convenient grip	•	•	•	•	
Pump oil warning system	•	•	•	•	
Onboard storage	•	•	•	•	
Parking brake	•	•	•	•	
Gun Holder	•	•	•	•	
Crane lifting point	•	•	•	•	
STANDARD EQUIPMENT					
Hose DN12 - 500bar / 15 M	106404670	106404670	106404670	106404670	
Gun dry-shut off 350bar	106404651	106404651			
Lance pipe 350 bar	106404652	106404652			
Gun dry-shut off 500bar			106404653	106404653	
Lance pipe 500 bar			106404654	106404654	
Nozzle Fan jet 15° / 1505	106404665				
Nozzle Fan jet 15° / 15045		106404664			
Nozzle Fan jet 15° / 1503			106404662		
Nozzle 0° jet / 0003				106404658	
ITEM NO. 50 HZ	107147021	107147022	107147024	107147025	

# MC10 – Heavy-Duty - Cold high pressure water washers





#### Mobile high pressure washing for extreme cleaning

- Powerful high-pressure water application, ranging from 500 to 1100 bars for cleanup of tough jobs
- Two-sided interface setup, for fast and easy overview of machine operation
- Large, four-wheel setup, making it easy to rollover obstacles and moorings
- Color-coded touch points for improved safety and more intuitive operation
- Tilting and turning capability give users more mobility on both smooth and rough surfaces

Knock paint and rust off ships preparing surfaces for repair or blast through solid materials with the MC 10P VHP (very high pressure washer). The MC 10P tackles difficult water jetting tasks using the high power to help crews clean or prepare surfaces for maintenance and repair.



TECHNICAL DATA	MC 10P-500/1800 400/3/50	MC 10P-500/1680 440/3/60	MC 10P-800/990 400/3/50	MC 10P-800/1170 440/3/60	MC 10P-1100/870 400/3/50	MC 10P-1100/900 440/3/60
Pump pressure (bar/MPa)	500/50	500/50	800/80	800/80	1100/110	1100/110
Cleaning impact (kg/force)	16.3	15.2	11.3	13.4	11.1	11.5
Water flow (I/h)	1800	1680	990	1170	870	900
Pump (RPM)	1470	1765	980	1175	980	1175
Max. water temperature (°C)	35	35	35	35	35	35
Power consumption (kW)	30	30	30	30	30	30
Voltage/phase/frequency/current (V/~/Hz/A)	400/3/50/58	440/3/60/55	400/3/50/59.3	440/3/60/55	400/3/50/59.3	440/3/50/59.3
Dimensions L x W x H (mm)	1670x750x1180	1670x750x1180	1670x750x1180	1670x750x1180	1670x750x1180	1670x750x1180
Weight (kg)	470	470	565	565	565	565
El-cable, oil resistant (M)	16	16	16	16	16	16
Nozzle size, straight fan 1/4"	15055	00050	15025	0003	0002	0002
FEATURES						
Pistons/number of pistns	Ceramic / 5	Ceramic / 5	Tungsten Carbide / 3	Tungsten Carbide / 3	Tungsten Carbide / 3	Tungsten Carbide / 3
Cable storage	•	•	•	•	•	•
Big wheels and convenient grip	•	•	•	•	•	•
Pump oil warning system	•	•	•	•	•	•
Onboard storage	•	•	•	•	•	•
Parking brake	•	•	•	•	•	•
Gun Holder	•	•	•	•	•	•
Crane lifting point	•	•	•	•	•	•
STANDARD EQUIPMENT						
Safety wire			106404650	106404650	106404650	106404650
Hose DN12 - 500bar / 20 M	106404671	106404671				
Hose DN12 - 1100bar / 20 M			106404655	106404655	106404655	106404655
Gun dry-shut off 500bar	106404653	106404653				
Lance pipe 500 bar	106404654	106404654				
Gun Shoulder Rest 500 bar	106404580	106404580				
Dump gun 15K			106404556	106404556		
Dump gun 20K					106404557	106404557
Nozzle Fan jet 15° / 15055	106404661					
Nozzle 0° jet / 0005		106404660				
Nozzle Fan jet 15° / 15025			106404684			
Nozzle 0° jet / 0003				106404658		
Nozzle 0° jet / 0002					106404672	106404672
ITEM NO.	107147030	107147031	107147032	107147033	107147034	107147035

# **Liquid sprayers**



Liquid Sprayers are hand-held low pressure manual sprayers. Specific models can be used with agressive detergents and acids.

PRODUCTS	1,5P	55	10SP	205
Alcohol	0	•	•	•
Chlorine			0	
Alcaline	0	0	0	0
Solvents	•	•	•	•
Mineral Oil	0	•	•	•
Acids automotive			0	
Acides Hygiene			0	

- Very Suitable
- o Limited Suitable



	1.5	8P	<b>5S</b>	10SP	205
TECHNICAL DATA	1.5	8P	55	10SP 1)	205
Pump pressure (bar)	2	4	6	6	6
Tank capacity (I)	1.25	8	5	10	20
Working pressure (bar/psi)	2/29	3/43	6/87	6/87	6/87
Max. water temperature (°C)	30	40	50	30	50
Length of hose (m)	-	1.3	1.4	2	4
Seal	Viton	Viton	Viton	Viton	Viton
Compressed air connection	No	No	Yes	Yes	Yes
With hand pump	Yes	Yes	Yes	No	No
Metal nozzle with regulation	Yes	Yes	Yes	Yes	Yes
Diameter (mm)	130	200	180	210	210
Height (mm)	300	620	460	580	890
Weight (kg)	0.4	2.2	3.5	6.2	7.5
ITEM NO.	80853	25598	7110005	7110010	7110020
	I	1	1	1	1
ACCESSORIES	1.5	8P	55	10SP 1)	205
Pistol valve (excl. hose and lance)			•/7110420		
Pistol valve (excl. hose and lance)				•/ 7110403	•/7110403
Manual pump, complete			•/7110241		
Hose			•/7110428	•/ 7110431	•/7110401
Spray gun, Pro acces			o / 4810328	o / 4810328	
Foam nozzle G 1/4			o / 308000057	o / 308000057	o / 308000057

<sup>1)</sup> The 10SP is a stainless steel tank for durability, with a polyethylene internal liner for use with detergents containing chlorine or those with a pH below 3.

### **HydroScrub** – a range of floor cleaners

The product increases cleaning width and reduces cleaning time compared to standard lances and nozzles in a very cost effective way. The HydroScrub's are robust and efficient surface cleaners for floor, wall or table cleaning tasks.

#### Application and customer groups:

The HydroScrub's are perfect tools for cleaning of surfaces in the automotive/transport segment, in food industries and for craftsmen. The different models can be used on machines in the low end, part of the middle range and the low and part of the high range of High Pressure Washers.

The HydroScrub is an effective tool for cleaning various large flat surfaces, and must be connected to Nilfisk high pressure washers fitted with the original size of nozzle.



#### How to choose the correct nozzles

Nilfisk machine Standard nozzle	You need:	Item no: 1st nozzle	Item no: 2 <sup>nd</sup> nozzle	P300	P400	\$500	P500 M
.0275	2 x .0165	102802851	102802851	•			
.0300	2 x .0165	102802851	102802851	•			
.0340	1 x .0200 + 1 x .0165	102802852	102802851	•	•		
.0350	1 x .0200 + 1 x .0165	102802852	102802851	•	•		
.0370	1 x .0200 + 1 x .0165	102802852	102802851	•	•		
.0400	2 x .0200	102802852	102802852		•		
.0400	1 x .0165 + 1 x .0285	102802851	102802854	•			
.0435	1 x .0200 + 1 x .0245	102802852	102802853	•	•		
.0450	1 x .0200 + 1 x .0245	102802852	102802853	•	•		
.0475	1 x .0200 + 1 x .0275	102802852	101117692		•		
.0475	1 x .0200 + 1 x .0285	102802852	102802854	•			
.0500	2 x .0275	101117692	101117692		•		•
0500	1 x .0245 + 1 x .0285	102802853	102802854	•			
.0530	2 x .0275	101117692	101117692		•		•
.0530	1 x .0245 + 1 x .0285	102802853	102802854	•			
.0550	2 x .0275	101117692	101117692		•		
.0550	2 x .0285	102802854	102802854	•			
.0600	2 x .0300	101117695	101117695		•	•	
.0640	1 x .0300 + 1 x .0340	101117695	101119735		•	•	
.0650	1 x .0300 + 1 x .0340	101117695	101119735		•	•	
.0680	2 x .0340	101119735	101119735		•	•	•
.0700	2 x .0350	101119736	101119736		•	•	
.0750	1 x .0350 + 1 x .0400	101119736	101119738		•	•	•
.0800	2 x .0400	101119738	101119738		•	•	
.0850	2 x .0435	101119739	101119739		•	•	•
.0900	2 x .0450	101119740	101119740		•	•	
.0950	2 x .0500	101119741	101119741		•	•	
.1000	2 x .0500	101119741	101119741		•	•	
.1100	2 x .0550	101119743	101119743			•	
.1200	2 x .0600	101119744	101119744			•	•
1300	2 x .0650	101119746	101119746			•	•
1500	2 x .0750	101119749	101119749			•	
.1590	2 x .0800	101119750	101119750				

TECHNICAL DATA	P300	P400	S500	P500 M
Diameter, cabinet (mm)	300	400	500	500
Side bar mountable on cabinet	Yes	No	No	No
Cabinet material	Injection moulded ABS	Injection moulded ABS	Stainless steel	Injection moulded ABS
Bearing for rotating arm:	Long life bearing	Long life bearing	Long life bearing	Long life bearing
Min/max. water flow (I/h)	420 / 750	600 / 1200	1000 / 2000	750 / 1400
Max pressure (bar)	200	250	250	250
Max temperature inlet water °C	60	60	60	60
Nozzles included	Yes	No	No	No
Machine use on - nozzle size	.02750550	.03401000	.06001590	.04751590
ITEM NO.	106403187	106403157	106403158	106403159

# Increased flexibility with Nilfisk Accessories & Options

The SC UNO, SC DUO and SH SOLAR can be equipped with an electronic control board. This gives the possibility to use a wide range of FACTORY-MOUNTED options and equipment such as remote control, coin boxes, pressure relief... The use of options means that a standard machine is quickly and easily configured to become a customer-specific solution.

Item no.:	Accessory or Factory Mounted Option	Description	SC UNO 4M PS	SC UNO 5M L	SC UNO 5M, 6P, 7P	SC DUO 6P, 7P
107371020	Accessory	Water Break Tank (WBT) max 40 l/min	×	X	Х	X (only for SC DUO 6P requires 2 WBT)
107371022	Accessory	Water Break Tank (WBT) max 40 l/min				X (only for SC DUO 7P requires 1 WBT)
107371023	Accessory	Water Inlet Security			X	Х
107371024	Accessory	Low Water Security Pressure switch on water inlet of stationary units. Set to 1 bar. If inlet water pressure is lower than 1 bar - the motor pump stops avoiding the unit running in "dry" mode. Needs a service technician to activate the accessory.			X	X
107371025	Accessory	2 x High pressure Detergent (Also needs Remote Control 107371026) Injection of 2 x detergent at high pressure. Volume can be adjusted on the detergent pumps. (0-13 l/hour). Needs a service technician to activate the accessory.			X Requires remote control and WBT	X Requires remote control and WBT
107371026	Accessory	Remote Control 6 functions Needs a service technician to activate the accessory.			X	X
107371027	Accessory	Coin Box ON-OFF + Detergent A-B (EUR, CHF, GBP) Coiner can be teached all coins) Needs a service technician to activate the accessory.			X	Х
107371028	Accessory	Pressure Relief If the system is not in use for a period of time (can be adjusted) the machine will close down and relieve the pressure in the high pressure line. Needs a service technician to activate the accessory.			X (Requires WBT)	X (Requires WBT)
107371029	Accessory	Accessory Storage and high pressure hose Can storage 3 lances, one foam sprayer and high pressure hose.	Х	Х	Х	Х
107371013	Accessory	Junctionbox Remote/slave.  Connection box for remote control extension cable. Needs a service technician to activate the accessory.			X	X
107371000	Factory Mounted Option	Water Break Tank (WBT) max 40 Vmin	Х	Х	Х	X (SC DUO 6P requires 2 WBT)
107371014	Factory Mounted Option	Water Inlet Security  Opens and closes a solenoid valve on the water inlet line, at the same time as the machine starts and stops.  Needs a service technician to activate the accessory.			X	Х
107371003	Factory Mounted Option	Stainless Steel cabinet parts UNO		×	X	
107371004	Factory Mounted Option	Stainless Steel cabinet parts DUO				Х
107371005	Factory Mounted Option	Low Water Security Pressure switch on water inlet of stationary units. Set to 1 bar. If inlet water lower than 1 bar - the motor pump stops avoiding the unit running in "dry" mode.			X	X
107371006	Factory Mounted Option	2 x High Pressure Detergent (Also needs Remote Control 107371007) Injection of 2 x detergent at high pressure. Volume can be adjusted on the detergent pumps. (0-13 l/hour).			X Requires remote control and WBT	X Requires remote control and WBT
107371007	Factory Mounted Option	Remote Control 6 functions			X	х
107371008	Factory Mounted Option	Coin Box ON-OFF + Detergent A-B (Coiner is for EUR, CHF, GBP coins) Coiner can be teached coins from all other kind of currencies.			X	X
107371009	Factory Mounted Option	Pressure Relief  If the system is not in use for a period of time (can be adjusted) the machine will close down and pressure drelief the high pressure line.			X (Requires WBT)	X (Requires WBT)
107371010	Factory Mounted Option	230/3/50 Conversion Kit 5M-L		×		
107371011	Factory Mounted Option	230/3/50 Conversion Kit 5M			X	
107371012	Factory Mounted Option	230/3/50 Conversion Kit 6P - 7P			X	

Option	Description	SH SOLAR D/G	SH SOLAR E
High Pressure detergent manual use	Injection of detergent under high pressure, manually controlled at the machine.	107340903	na
	If WBT is added max. inlet of water temperatur for SC UNO $4M+5M = 40$ degres If WBT is added max. inlet of water temperatur for SC UNO/DUO $6P+7P = 70$ degres		
Cold/Warm switchover EH	Allows double water inlet (either hot or cold) and switchover between sources.	na	107370959
1 x detergent, EL. SOLAR OPTION	Injection of 1 x detergent under high pressure controlled by solenoid valve and dosing unit.  Detergent can be activated at a remote control unit or box.	107370952 Also need: Remote control box with 4 buttons	107370952 Also need: Remote control box with 4 buttons
2 x detergent, EL. SOLAR OPTION	Injection of 2 x detergent under high pressure controlled by solenoid valve and dosing unit.  Detergent can be activated at a remote control unit or coin box.	107370953 Also need: Remote control box with 5 buttons	107370953 Also need: Remote control box with 5 buttons
Option Automatic Pressure relief	If the system is not in use for 10 minutes (or 20 seconds after the system closes down), a valve opens and relieves the pressure in the high pressure piping line. The entire system is free of pressure and must afterwards be started again.	107370966	107370966
No-Scale Unti SOLAR Option	Prevents scale in the boiler or internal water tank.	107370958	107370958
Low water security - 1 bar	Pressure switch on water inlet of the stationary unit. Set to 1 bar. Inlet water lower than 1 bar - the motor pump stops avoiding the unit running in "dry" mode.	107340905	Standard
Water inlet security option	Opens and closes a solenoid valve on the water inlet line, at the same time as the machine starts and stops.	107340910	na
Remote control boxes	On-Off= 2 buttons On-Off+1 function (burner or option) = 3 buttons On-Off+2 functions (burner or option) = 4 buttons On-Off+2 functions (burner or option) = 5 buttons Mains cut off button	107340911 107340912 107340913 107340914 29277	107340911 107340912 107340913 107340914 29277
Coin boxes €½ Coin boxes €1 Coin boxes Token Coin boxes 104, incl. Detergent Coin boxes €1, incl. Detergent Coin boxes 61, incl. Detergent Coin boxes Token, incl. Detergent	Mechanical, simple on-off, €½ Mechanical, simple on-off, €1 Mechanical, simple on-off, Tokens Mechanical, on-off + 1 detergent, €½ Mechanical, on-off + 1 detergent, €1 Mechanical, on-off + 1 detergent, Token	54328 54329 54330 54332 54332 54333	54328 54329 54330 54332 54333 54334
FROST PROTECTION - Standard	Water wasted/no recirculation. Requires a built-in pressure relief. Change gun to "weeping gun".	107370954	107370954
FROST PROTECTION - Deluxe	incl. heating unit	107370955	107370955
M.M.O.	Allows connection of up to 3 SOLAR units together	107370964	107370964
Closed air intake for gas models	Closed air intake for gas models	107370965	107370965
Stainless steel parts G/GH	Stainless steel cabinet	107370963 (G+GH)	
Stainless steel parts D/EH	Stainless steel cabinet	107370962 (D)	107370962 (EH)
2 x chemical magnet valve	Requires control kit	107360901	
Winter gun - 12 bar	For frost protecion - water wasted	106402243	106402243

	MC 2G120/520 T MC 2G120/520 XT MC 2G140/610 XT MC 2G150/650	MC 2C-150/650 XT MC 3C-150/660	MC 3C-150/660 XT MC 3C-160/770 MC 3C-170/820	MC 3C-170/820 XT MC 5M-180/840	MC 5M-180/840 XT MC 5M-200/1000	MC 5M-200/1000 XT MC 5M-200/1050	MC 5M-200/1050 FA MC 5M-200/1050 XT	MC 5M-220/1130 MC 5M-220/1130 FA	MC 5M-220/1130 XT MC 4M-140/620 MC 4M-160/620	MC 4M-180/740	MC 4M-180/740 XT	MC 6P-170/1600 FA. MC 6P-170/1600 FAXT	MC 6P-180/1300 FA MC 6P-180/1300 FA XT	MC 6P-200/1100 FAXT	MC 6P-250/1100 FA MC 6P-250/1100 FAXT	MC 7P-195/1280 FA	MC 7P-195/1280 FAXT MC 7P-195/1280 FBFA	MC 7P-195/1280 FFA	MC 8P-160/2500 ST	MC 8P-180/2100	MH 3C-145/600 PA MH 3C-145/600 PAX	MH 3C-180/780 PA	MH 3C-180/780 PAX	MH 3M-140/580 PAX 230/1/50 EU	MH 3M-160/770 PA	AND ANA 130/730 EA
Ergo System Coupling and Adapter COUPLING - FEMALE/Q-COUPL 3/8 INCH	0000	0.0	0 0 0	0.0	0.0			0 0	0 0 0			0 0			0 0		0 0		2 0	0	0 0					
Cool Line Telwatery Cool Estation																						-				
ERGO COUPLING KIT	0000	0 •	• • •	••	• •	• •	• •	• •	• • •	•	•	• •	• •	•	• •	•	• •	• •	• •	•	• •	•	• •	•	• •	
												<u>.</u>														
HIGH PRESSURE COUPLINGS KIT	0000	0.0					0.0	0 0	000			0 0			0 0		0 0			0	3 0		0 0		0 0	
Nippel F. Q-COUPL. 3/8 INCH	0000	0 0	0 0 0	0 0	0 0	0 0	00	0 0	0 0 0	000	0 0	0 0	0 0	0	0 0	0	0 0	0 0	0	0	0 0	0	0 0	0	0 0	
NIPPLE FOLLOW COLLING 2005																										
NIPPLE F/QUICK COULING 3/8 SS	0000						J 0							, 0							<i>y</i> 0				J (	-
NIPPLE FOR SPRAY LANCE STAN.L	0000	0 0	0 0 0	0 0	0 0	0 0	0 0	0 0	0 0 0	000	0 0	0 0	0 0	0	0 0	0	0 0	0 0	0	0	0 0	0	0 0	0	0 0	
PACK.RING D23.8XD14.96 3/8NBR SELF-CENT.	0000	0 0	0 0 0	0 0	0 0	0 0	0 0	0 0	000	000		0 0			0 0	0	0 0	0 0	0 0	0	0 0		0 0		0 0	
																						-				-
High Pressure Male Coupling ADAPTER KEW QUICK COUPLING MALE 3/8			0 0 0	0 0	0.0	0 0	0 0	0 0	0 0 0			0 0	0.0		0 0	0	0 0	0.0		0	0 0		0.0		0 0	
																										-
ADAPTOR 3/8 INCH MALE FOR HOSE	0000	0 0	0 0 0	0 0	0 0	0 0	00	0 0	0 0 0	000	0	0 0	0 0	0	0 0	0	0 0	0 0	0	0	0 0	0	0 0	0	0 0	
ADAPTOR KEW GUN TO WAP ACCESS.	0000	0 0	0 0 0	0 0	0 0	0 0	0 0	0 0	0 0 0			0 0			0 0	0	0 0	0 0	0 0	0	0 0		0 0		0 0	
																										-
GARDENA COMPATIBLE MALE 3/4" ACCESSORY	••••	• •	• • •	•					• •	•	•	·····•									0 0	0	0 0	0	0 0	-
GARDENA COUPLING HOSE END 1/2 BULK	0000	0 0	0 0 0	0 0	0 0	0 0	0 0	0 0	0 0 0	000	. 0	0 0	0 0	0	0 0	0	0 0	0 0	0 0	0	0 0	0	0 0	0	0 0	-
GEKA COUPLING HOSE END 3/4	0000	0 0	000	0 0	0 0	0 0	00	0 0	0 0 0	000		0 0	0 0	0	0 0	0	0 0	0 (	0 0	0	0 0	0	0 0	0	0 0	-
HOSE LINER 20 R1																	_		•	•		-				_
LP NIPPLE F. QCOUPLING 3/4IN	0000	0 0	0 0 0	0 0	0 0	0 0	0 0	0 0	0 0 0	000		0 0	0 0	) 0	0 0	0	0 0	0 0	0 0	0	0 0	0	0 0	0	0 0	
NITO COUPLING HOSE END 1	0000	0 0	0 0 0	0 0	0 0	0 0	0 0	0 0	0 0 0	000	0 0	0 0	0 0	0	0 0	0	0 0	0 0	0	0	0 0	0	0 0	0	0 0	-
High Pressure Female Coupling						• • • • •							• • • •			• • •		• • •		•	• • •	• • •		• • •		
ADAPTER KEW QUICK COUPLING FEMALE 3/8	0000	0 0	0 0 0	0 0	0 0	0 0	0 0	0 0	0 0 0	000	0 0	0 0	0 0	0	0 0	0	0 0	0 0	0	0	0 0	0	0 0	0	0 0	
ADAPTER WAP GUN COUPLING FEMALE M21X1.5	0000	0 0	000	0 0	0 0	0 0	0 0	0 0	0 0 0	000	0 0	0 0	0 0	0 0	0 0	0	0 0	0 0	0 0	0	0 0	0	0 0	0	0 0	

MH 4M-200/960 FA MH 4M-200/960 FAX MH 4M-2101/000 PAX	MH 4M-220/1000 FA MH 4M-220/1000 FAX	MH 5M-200/960 FA	MH 5M-210/100 FA	MH 5M-210/1100 FAX	MH 5M 180/800 PA	MH 5M 180/800 PA	MH 6P-175/1250 FA	MH 6P-200/1300 FA	MH 6P-200/1300 FAX	MH 7P-180/1260 FA	MH 7P-180/1260 FAX	MH 8P-180/2000 FA MH 8P-180/2000 EAX	SC IINO 4M-140/620 PS	SC UNO 4M-160/720 PS	SC UNO 5M-200/1050	SC UNO 5M-200/1050 L	SC UNO 6P-170/1610	SC UNO 6P-200/1900	SC UNO 7P-180/1200	SC DUO 6P-160/5000	SC DUO 6P-1/0/3220 SC DUO 6P-200/3800	SC DUO 7P-180/2400	SC DELTA 6P 160/4500-3 EU	SC DELTA 6P 160/6000-4 EU	SC DELIA OF 180/3000-6 EU	SC DELIA 8P 100/10000-4 400/3/50 EU SC DELIA 8P 100/15000-6 400/3/50 EU	SC DELTA 8P 100/7500-3 400/3/50 EU	SH SOLAR 7P-170/1200 D	SH SOLAR 7P-170/1200 DSS	SH SOLAR 8P-180/2000 D	SH SOLAR 7P-135/875 E18 SH SOLAR 7P-170/1200 E18	SH SOLAR 7P-170/1200 E36	SH SOLAR 7P-170/1200 E54	SH SOLAR 5M-150/1020 G	SH SOLAN /F-1/0/1200 G	SH TRUCK 7P-175/1260	SH AUTO 5M-100/500 DSS	SH AUTO 5M-100/500 E	MC 2C-160/740 PET	MC 4C 220/770 PEXT	MC 5C 230/940 PE	MC 5C 280/1000 PE	MC 5C 280/1000 PEXT	Ė.	MC 5M 280/1100 PE	MC 7P-220/1100 PE Cage	MH 5M-200/1000 DE	MH 7P-220/1120 PE	MH 7P-220/1300 DE		Item no.		
000	0 0	0 0	0 0	0 0	0	0 0	0	0	0	0	0	o c	0	0	0	0 0	0	0	0	0 0	0 0	0	0	0 0	) (	0 0	0	0	0	0 (	0 0	0	0	0 0	) c	0			0 0	) c	0	0	0	0	0 (	o 0	0	0	0		1064	10207	5
																		-				_												0 (								_									101	110/10	6
•••	••	• •		• •		• •		•	•	•	•	• •			•	• •		•	•	0 0	0	0	0	0 0			0	0	0	0 (	0 0		0	0 0		•			• •			•	•	•	• •	•	•	•	•		101	11949	
000	0 0	0 (	0 0	0 0	0	0 0	0.0	0	0	0	0	0.0	0	0 0	0	0 0	0	0	0	0 0	0 0	0	0	0 0	o (	0 0	0	0	0 (	0 (	0 0	0	0	0 0	o c	0			0 0	) c	0	0	0	0	0 (	0 0	0	0	0		101	11949	9
000	0 0	0 0	0 0	0 0	0	0 0	0 0	0	0	0	0	o c	0	0	0	0 0	0	0	0	0 0	0 0	0	0	0 0	<b>)</b>	0 0	0	0	0	0 (	0 0	0	0	0 0	) c	0			0 0	) c	0	0	0	0	0 (	o 0	0	0	0		16	0049	3
																-					-																					•											
000	0 0	0 0	0	0 0	0	0 0	0	0	0	0	0	o c	0	0	0	0 0	0	0	0	• (	• •	•	0	0 0	o (	0	0	0	0 (	0 (	0 0	0	0	0 0	o c	0			0 0	) C	0	0	0	0	0 (	0 0	0	0	0		16	50310	1
000	0 0	0 0	0 0	0 0	0	0 0	0	0	0	0	0	0 0	0	0	0	0 0	0	0	0	0 0	0	0	0	0 0	) (	0		0	0 (	0 (	0 0	0	0	0 0	) c	0			0 0	) c	0	0	0	0	0 (	0 0	0	0	0		16	0932	5
000	0 0	0 (	0 0	0 0		0 0	0 0	0	0	0	0	0 0	0		0	0 0	0	0	0	0 (	0 0	0	0	0 0	) (	0 0		0	0	0 (	0 0	0	0	0 0	o c	0			0 0	) c	. 0	0	0	0	0 (	o 0	0	0	0		18	30107	5
								•••										• • •				•••																				• • •					• •	• • •		•••			•••
000	0 0	0 0	0 0	0 0	0	0 0	0	0	0	0	0	o c	0	0						0 0	0	0													c	0											0	0	0			6615	9
000	0 0	0 (	0 0	0 0	0 0	0 0	0 0	0	0	0	0	o c	) c	0 0	0	0 0	0	0	0	0 0	0 0	0	0	0 0	o (	0 0	0	0	0	0 (	0 0	0	0	0 0	) c	0			0 0	) C	0	0	0	0	0 (	o 0	0	0	0		64	10106	7
000											_			0 0		_	0			· ·										· ·	0 0			0 6					0 0			_				0 0						6616	1
													,   0																																							0010	
													•	•																									• •	•	•	•	•	0	• •	• 0					1064	10452	9
000	0 0	0 0	0 0	0 0	0	0 0	0 0	0	0	0	0	0 0	0	0	0	0 0	0	0	0	0 0	0 0	0	0	0 0	) c	o 0	0	0	0	0 (	0 0	0	0	0 0	) c	0			0 0	) C	0	0	0	0	0 (	o 0	0	0	0		16	0862	9
000	0 0	0 0	0 0	0 0	0	0 0		. 0	0	0	0	o c	) c	0 0	0	0 0	. 0	0	0	0 (	0 0	0	0	0 0	) c	0 0		0	0	0 (	0 0	0	0	0 0	) c	. 0			0 0	) c	. 0	0	0	0	0 (	) )	. 0	0	0			131	1
												0 0																																								657	7
																																																				037	
000	0 0	0 (	0 0	0 0	0	0 0	0 0	0	0	0	0	0 0	0	0	0	0 0	0	0	0	0 0	0	0	0	0 0	> 0	0.0	0	0	0	0 (	0 0	0	0	0 0	o c	0			0 0	) c	0	0	0	0	0 (	0 0	0	0	0		16	0065	9
000	0 0	0 0	0 0	0 0	0	0 0	0 0	0	0	0	0	0 0	0	0 0	0	0 0	0	0	0	0 0	0	0	0	0 0	o (	0 0	0	0	0	0 (	0 0	0	0	0 0	o c	0			0 0	) c	0	0	0	0	0 (	0 0	0	0	0		16	0466	9
	•••	•••			•••				• • •		••			• • •				• • •				•••					•					•••						-				• • •					•		•••	•••	• • • •	••••	•••
000	0 0	0 0	0	0 0	0	0 0	0	0	0	0	0	o c	0	0	0	0	0		0	0 0	0	0	0	0 0	0 0	0 0	0	0	0 (	0 (	0 0	0	0	0 0	O C	0			0 0	) C	0	0	0	0	0 0	0 0	0	0	0			6616	)
000	0 0	0 0	0 0	0 0	0	0 0	0 0	0	0	0	0	0 0	0	0	0	0	0		0	0 0	0 0	0	0	0 0	0 0	0 0	0	0	0 (	0 (	0 0	0	0	0 0	) c	0			0 0	) c	0	0	0	0	0 (	0 0	0	0	0			6616	2
													L					L																				L															


<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

		_																										-		_		
High Pressure Female Coupling	MC 2G-120/520 T MC 2G-120/520 XT	MC 2C-140/610 XT	MC 2C-150/650 XT	MC 3C-150/660 XT	MC 3C-160/770 MC 3C-170/820	MC 3C-170/820 XT	MC 5M-180/840 MC 5M-180/840 XT	MC 5M-200/1000	MC 5M-200/1000 XT	MC 5M-200/1050 FA	MC 5M-200/1050 XT MC 5M-220/1130	MC 5M-220/1130 FA	MC 5M-220/1130 XT MC 4M-140/620	MC 4M-160/620	MC 4M-160/620 XT MC 4M-180/740	MC 4M-180/740 XT	MC 6P-170/1600 FAXT	MC 6P-180/1300 FA MC 6P-180/1300 FAXT	MC 6P-200/1100 FAXT	MC 6P-250/1100 FA	MC 7P-195/1280 FA	MC 7P-195/1280 FBFA	MC 7P-195/1280 FFA	MC 8P-160/2500	MC 8P-180/2300 31	MH 3C-145/600 PA	MH 3C-145/600 PAX MH 3C-180/780 PA	MH 3C-180/780 PAX	MH 3M-140/580 PA	MH 3M-140/580 PAX 230/1/50 EU MH 3M-160/770 PA	MH 3M-160/770 PAX 400/3/50 EU	MH 4M-13U/72U FA
•	0 0	0 0	000	0 0	0 0	0	0 0	0	0 0	0	0 0	0	0 0	0 (	0 0	0 0	0 0	0 0	0 (	0	0	0	0	0 0	0	0	0 0	0	0 0	٥ د	0	<b>)</b> (
																										•						
HOSE NOZZLE 20R3/4	0 0					, 0			• •	•	• •		• 0		0 0			• •								•					•	
QUICK COUPLING 3/4 W/GASKET	0 0	0 0	000	0 0	0 0	0	0 0	0	0 0	0	0 0	0	0 0	0 (	0 0	0 0	0 0	0 0	0 (	0	0	0	0			0	о с	0	0 0	0 0	0	) c
High Pressure Hose, DN6 10 M WIRE HOSE DN6	0	c		•	• •		• 0	•	0					•												0	о с	0	0 0	0 0	0	<b>3</b> (
•									•••••				<u>-</u>								<b>-</b>										•	
HIGH PRESSURE HOSE DN6X8200MM							<u>-</u>			<u> </u>																	<u>-</u>					
HOSE DN6 10M 1W FOR P-2	•																															
IOSE DN6 15 M 1W - 3/8-QC	0	0	0				····•						<u>-</u>					····•								0	0 0	0	0 0	0 0	•	
HOSE STEEL ARMED DN6X12M													<u>-</u>					····•													•	
OSC STEEL ANNIES BROWNER						-							<u>-</u>					····•														
HP HOSE DN6 15 FOR HW AND SWIVEL	0 0	0	0						·····•				<b>-</b>					····•					-						·····•			
																		····•														
HP HOSE DN6X10M QC 3/8IN NILFISK HW													<u>.</u>										-			•	0 •		• •	•	0	
HP-HOSE DN6 15M 3/8-3/8 F. QUICK COUPL	0	c	)			-	•		•				0	0	0											0	• 0	•				
																		<b>.</b>													•	
HP-HOSE DN6 15M SWIVEL-3/8 F. HOSE REEL		•	•																				-									
HP-HOSE DN6X15M MC 3-4		· · · ·		•		•									•	•		····•														
							_											<b>-</b>						<u>.</u>	•		_					
High Pressure Hose, DN8	0 0	0 0	0				0 0	0	0 0	0	0 0	0	0 0	0	0							_				0	o c	0	0 0	0 0	0	2
HOSE DN8 1 WIRE 10M W.ERGO FEMALE COUPL.	00	0 0	0				0 0	0	0 •	•	0	•	0	0	0											0	0 0	0	0 0	0	0	D
	0 0			2 0					0		•		0 0	0	_			····•	•							0	0 (		0 0	2 0		· ·
																		····•														
HOSE DINS I WIKE ISM W.EKGO FEMALE COUPL.																																
							0 0	0	0 0	0	0 0	0	• 0	0	0			····•								0	0 0	0	0 0	) 0	0	2
HOSE DN8 1 WIRE 20M W.ERGO FEMALE COUPL.	0 0						-						• 0							_			-						0 0			

<sup>●</sup> Standard accessories
O Supplementary accessories
□ Supplementary and mountable accessories

						Į																								ı									ı					Į	ı	1	ı						ı	ı	ı	ı				
MH 4M-200/960 FAX	MH 4M-210/1000 PAX	MH 4M-220/1000 FA	MH 5M-200/960 FA	MH 5M-200/960 FAX	MH 5M-210/1100 FA	MH 5M-210/1100 FAX	MH 5M-210/1100 PAX	MH SM 180/800 PA	MH 5M 180/800 PA	MH 6P-175/1250 FA	MH 6P-175/1250 FAX	MH 6P-200/1300 FA	MH 6P-200/1300 FAX	MH 7P-180/1260 FA	MH 7P-180/1260 FAX	MH 8P-180/2000 FA	MH 8P-180/2000 FAX	SC UNO 4M-140/620 PS	SC UNO 4M-160/720 PS	SC UNO 5M-200/1050	SC UNO 5M-200/1050 L	SC UNO 6P-160/2500	SC UNO 6P-170/1610	SC UNO 6P-200/1900	SC UNO 7P-180/1200	SC DUO 6P-160/5000	SC DUO 6P-170/3220	SC DUO 6P-200/3800	SC DUO 7P-180/2400	SC DELIA OF 100/4500-3 EU	SC DELIA 6P 160/6000-4 EU	SC DELTA 8P 100/10000-4 400/3/50 FU	SC DELTA 8P 100/15000-6 400/3/50 EU	SC DELTA 8P 100/7500-3 400/3/50 EU	SH SOLAR 7P-170/1200 D	SH SOLAR 7P-170/1200 DSS	SH SOLAR 8P-180/2000 D	SH SOL AR 7P-135/875 E18	SH SOLAR 7P-170/1200 E18	SH SOL AR 7P-170/1200 E36	SH SOLAR 7P-170/1200 E54	SH SOLAR 7P-170/1200 G	SH TRUCK 5M-180/970	SH TRUCK 7P-175/1260	SH AUTO 5M-100/500 DSS	SH AU IO SM-100/500 E	MC 3C 180/770 PET	MC 4C 220/770 PEXT	MC 5C 230/940 PE	MC 5C 280/1000 PE	MC 5C 280/1000 PEXT	MC 5M-195/1000 DE	MC 5M 280/1100 PE	MC 5M 280/1100 PE Cage	MC 7P-220/1120 PE PLUS	MH 5M-200/1000 DE	MH 7P-220/1120 PE	MH 7P-220/1300 DE	;	Item no.
0	0	0 0	0	0	0	0 (	0	0	0 (	0	0	0	0	0	0	0	0	0	0	0	0		0		0	0	0	0 (	) )	<b>)</b>	) c	0	0	0	0	0	0	0	0	0	0 0	0	0	0		c	) C	0	0	0	0	0	0	0	0	0	0	0		1
•								2	0 (			•	•		•		0	0					0	0	0	0	0	0 1						•		•			·····•					•		• 0					0			0						61
																																		•		•			·····•		·····•																			
0	0	0 0	0	0	0	0 (	0	Э.	0 (	0	0	0	0	0	0	0	0	0	0	•	•	•	•	•	•	0	•	•	•						0	0	0		·····•		c	0	0	0		c	) C	0	0	0	0	0	0	0	0	0	0	0		1602
			• •	• • •							٠.						•							• •	٠.							• •	••	• •		• • •						••	• • •							• •		• •	• •	• •	•	• •		• • •		• • • •
0 0	0	0 0	)															•	•															• · · · ·		•					·····•					•	•	0											30	01002
																																							·····•						•	•													10	01405
																																		•		•			······•		·····•																			
															•																								······•		·····•					c	0	0											12	26528
																																														c	) c	•												6528
									_						-																					_									0 (	0	_									_			10	01406
																																								_					_				_								_		1(	01117
			_																															•																										
															•																			•		•					•																		10	)1406
		-																0	0																				·····•																				10	01406
																	-																																											
																	-																																										10	01406
																																							<u>.</u>		····•																		10	07142
																		ļ																		• • •																								• • • •
0	0	0 0	0	0	0	0 (	0	0	0									0	0																	•	0	0			c	)				c	) C	0	0	0	0	0	0	0	0	0	0			1405
										_	_	_	_																																															3140
• 0	U	- 0	, •		•	) ن	ا ر		• (	J	0	U	J	٥	0			٥	0	•	•																0	U									, 0	. 0	•	•	0	•	•	0	•	0	0		10	01405
	•	0	0	0	0	0 (	0	0	0 (	0	0	0	0	0	0						0															-		0			c	)				c	0	0	0	0	0	0	0	•	0	•	•		30	01001
<b>•</b>				•																			П																																					
		0 0	0	•	0	•	•	0	0												0															•		0		_	c	,				c	0	0	0	0	•	0	0	0	0	0	0		30	0100
0 0	0									0	0	0	0								0															•		0						0												-	0			1405

Standard accessories
 Supplementary accessories
 Supplementary and mountable accessories

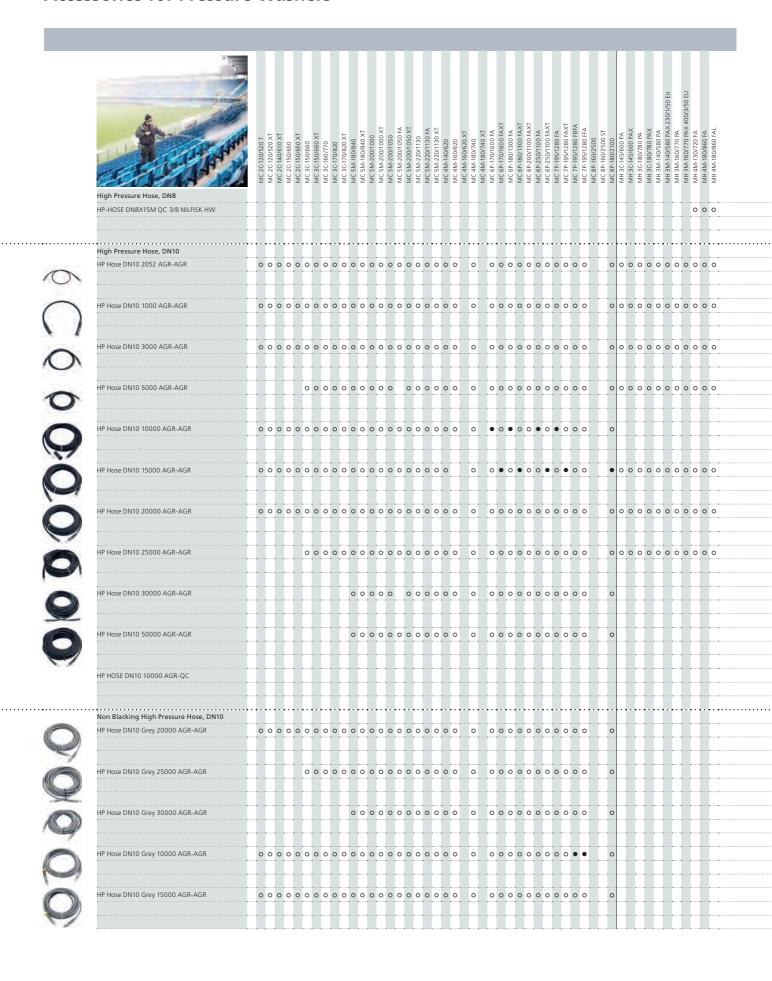

																																				ı			ı										ı						
MH 4M-200/960 FA	MH 4IM-200/950 FAX MH 4M-210/1000 PAX	MH 4M-220/1000 FA	MH 4M-220/1000 FA	MH 5M-200/960 FA	MH 5M-200/960 FAX	MH SM-210/1100 FA	MH 5M-210/1100 PAX	MH 5M 180/800 PA	MH 5M 180/800 PA	MH 6P-175/1250 FA	MH 6P-175/1250 FAX	MH 6P-200/1300 FA	MH 6F-200/1300 FAX	MH 7F-180/1260 FA	MH 8P-180/2000 FA	MH 8P-180/2000 FAX	SC UNO 4M-140/620 PS	SC UNO 4M-160/720 PS	SC UNO 5M-200/1050	SC UNO 5M-200/1050 L	SC UNO 6P-170/1610	SC UNO 6P-200/1900	SC UNO 7P-180/1200	SC DUO 6P-160/5000	SC DUO 6P-170/3220	SC DUO 8P-200/3800	SC DELTA 6P 160/4500-3 EU	SC DELTA 6P 160/6000-4 EU	SC DELTA 6P 160/9000-6 EU	SC DELTA 8P 100/10000-4 400/3/50 EU	SC DELIA 8P 100/15000-6 400/3/50 EU	SC DELIA 8P 100/7500-5 400/5/50 EU SH SOI AR 7P-170/1200 D	SH SOLAR 7P-170/1200 DSS	SH SOLAR 8P-180/2000 D	SH SOLAR 7P-135/875 E18	SH SOLAR 7P-170/1200 E18 SH SOLAR 7P-170/1200 E36	SH SOLAR 7P-170/1200 E54	SH SOLAR 5M-150/1020 G	SH SOLAR 7P-170/1200 G	SH TRUCK 2P-175/1260	SH AUTO 5M-100/500 DSS	SH AUTO 5M-100/500 E	MC 2G-160/740 PET	MC 3C 180/7/0 PEI	MC 5C 230/940 PE	MC 5C 280/1000 PE	MC 5C 280/1000 PEXT	Ż	MC 5M 280/1100 PE	MC 7P-220/1120 PE PLUS	MH 5M-200/1000 DE	MH 7P-220/1120 PE	INT 71-420 1900 UE	Item no.	
0	•	• c	•																																							-									-			101406	5102
0 0	· • ·	• ·	0		0 (	· •	0	••	0		0	0 (	0 0	. <b>.</b> .	••		0	0	0 (	· • ·			0	0	0 0	· • ·	••	0	0	0.	0.0	· • ·	••	0	0	0 0		0	0 0	· • ·	••	•••	0 0	o o	••	0	0	0	0 0		0	0 (	•••	1402	2924
0 0	0	) C	0	0	0 (	o (	0	0	0	0	0	0 (	0 0	o c	0	0	0	0	0 (	o c	) O	0	0	0	0 0	o c	0	0	0	0 (	0 0	o c	. 0	0	0	0 0	0	0	0 0	o c	)		0 0	o 0	0	0	0	0	0 0	0	0	0 (	)	1402	2916
0 (	0 0	) C	0	0	0 (	0 0	0	0	0	0	0	0 (	0 0	o c	0	0	0	0	0 (	) C	0	0	0	0	0 0	o c	0	0	0	0 (	0 0	) c	. 0	0	0	0 0	0	0	0 0	) c	)		0 0	o 0	0	0	0	0	0 0	0	0	0 (		1402	2932
0 0																														0					0					) c														1402	2040
															, 0																												0 (											1402	
				0	0 (	0 0	0	0	0	•	0	• (	0	• c	0	0	0	0	0 (	o c	•	0	•	0	0 0	o c	0	0	0	0 0	0 0	) C	0	0	0 (	0	0	0	0 •	• •			0 0	0	0	0	0	0	0 0	0	0	0 0		6101	1766
0 0	0	) C	0	0	0 (	0 0	0	0	0	0	0	0 (	0 0	o c	0	0	0	0	0 (	o c	0	0	0	0	0 0	o c	0	0	0	0 0	0 0	) C	0	0	0 (	0 0	0	0	0 0	0	)		0 0	0	0	0	0	0	0 0	0	0	0 (		1402	2064
o (	0	) C	0	0	0 (	0 0	0	0	0	0	•	0 (	• (	o •	0	0	0	0	0 (	<b>)</b>	0	0	0	0	0 0	o c	0	0	0	0 0	0 0	) c	0	0	0	0 0	0		C	o 0	)		0 0	o 0	0	0	0	0	0 0	0	0	0 0	)	1402	2072
۰ ،		) c	0	0	0 (	o (		0	0	0	0	0 (	0 0	o c	0		0	0	0 (	) c	) o	0	0	0	0 0	) c		0	0	0 0	0 0	) c		0	0	0 0	0	0	0 0	) c	)		0 (	) c		0	0	0	0 0	0	0	0 (	· ·	1402	2080
					0 1							0 (													0 (					0 (					0								0 (									0 (		1402	2008
																																																					-		
				0	0 (	0 0	0	0	0	0	0	0 (	0 0	o c	0	0			0 (	) C	0	0	0	0	0 0	o c	0	0	0	0 0	0 0	) C	0	0	0	0 0	0	0	0 0	o c			0 0	0	0	0	0	0	0 0	0	0	0 0		1402	2759
									-										0 (	o c	0	•	0																															101406	5220
• • •		••	•••	0	0 (	· •			0	0	0	0 (	0 0	· • ·	••					. <b>.</b> .			0	0	0 0	· • ·	•••	0	0		0 0	· • ·		0			•			· • ·	•••		0 0		•••	0		· •	0 0	••	0	0 0	•••	1401	1991
<u>.</u>					0 (	2	0 0	0			0	0 (	0 (	2 0					0 (	2 0		0		0	0 (	2 0			0	0 (	0 0			0	0	2 0	. 0		0 (	2 0			0 (	2 0			0	0	0 0		0	0 (		1402	2007
									-																																														
				0	0 (		0	0	0	0	0	0 (	0 0	o c	0	0		_	0 (	o c	0	0	0	0	0 0	o c		0	0	0 (	0 0	o c		0	0	0 0	0	0	0 0	o c	)		0 0	o c		0	0	0	0 0	0	0	0 (		1402	2015
				0	0 (	0 0	0	0	0	0	0	0 (	0 0	o c	0	0			0 (	o c	0	0	0	0	0 0	o c	0	0	0	0 (	0 0	) c	0	0	0	0 0	0	0	0 0	o c	)		0 (	0 0	0	0	0	0	0 0	0	0	0 (	)	6101	1767
				0	0 (	o (	0	0	0	0	0	0 (	0 0	o c	0	0		-	0 (	o c	0	0	0	0	0 0	o c	0	0	0	0 (	0 0	) C	0	0	0	0.0	0	0	0 0	o c	)		0 (	o 0	0	0	0	0	0 0	0	0	0 (	)	1401	1983
															_		ļ																																						

<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

	*	П	ı	ī			r		ı		ı	ı		ı	ı	ı				٦	ı	Ī	ı	ı	ı			1			Ī	r		Ī	ľ	ı
	High Pressure Hose, DN12	MC 2G-120/520 T MC 2G-120/520 XT	MC 2G-140/610 XT MC 2G-150/650	MC 2G-150/650 XT	MC 3C-150/660 XT	MC 3C-160/770	MC 3C-170/820 XT	MC 5M-180/840	MC 5M-180/840 XI MC 5M-200/1000	MC 5M-200/1000 XT	MC 5M-200/1050	MC 5M-200/1050 FA MC 5M-200/1050 XT	MC 5M-220/1130	MC 5M-220/1130 FA MC 5M-220/1130 XT	MC 4M-140/620	MC 4M-160/620 MC 4M-160/620 XT	MC 4M-180/740	MC 4M-180/740 X1 MC 6P-170/1600 FA	MC 6P-170/1600 FAXT	MC 6P-180/1300 FA	MC 6P-200/1100 FAXT	MC 6P-250/1100 FA	MC 7B 10E 4390 EAXT	MC 7P-195/1280 FA MC 7P-195/1280 FA XT	MC 7P-195/1280 FBFA	MC 7P-195/1280 FFA	MC 8P-160/2500	MC 8P-160/2500 ST	MC 8F-180/2100 MH 3C-145/600 PA	MH 3C-145/600 PAX	MH 3C-180/780 PA	MH 3C-180/780 PAX MH 3M-140/580 PA	MH 3M-140/580 PAX 230/1/50 EU	MH 3M-160/770 PA	MH 3M-160/770 PAX 400/3/50 EU MH 4M-130/720 EA	MH 4M-180/860 FA
)	HP Hose DN12 10000 AGR-AGR							0 (	0 0	0	0 (	0 0	0	0 0						·····			C	0	0	0	0	0 1	0							
)	HP Hose DN12 15000 AGR-AGR							0 (	0 0	0	0 (	0 0	0	0 0				0	0	0 0		0	0 0	) c	0	0	•	•	2							
,	HILLIANS DAVIS 20000 A C.P. A C.P.																																			
	HP Hose DN12 20000 AGR-AGR							0 (			0 (		0	0 0														0 1	5							
	HP-HOSE DN12X10M QC 3/8 AG NILFISK HW																																			
	HP-HOSE DN12X15M QC 3/8 AG NILFISK HW									-																										
				• • • •			• • • • • • • • • • • • • • • • • • • •								• • •				• • •						••		• • •			•••			• • •			• • •
	Hose and Connection  GEKA HOSE COUPLING 1/2	0 0	0 0	0 0	0	0 0	0								0 0	0 0	0	0																		
1.1	HOSE GUIDE COMPLETE		-					0 0	0 0	0	0 (	0 0	0	0 0				0	0	0 0	0	0	0 0	> 0	0	0	-									
	NILFISK BA VALVE COMP. GARDENA	0 0	0 0	0 0	0	0 0		0 (	0 0	0	0 (	0 0	0	0 0	0 (		0	0 0		0 0	0	0	0 0	> 0	0	0			0	. 0	0	0 0	0	0	0	•
												•																								
	NILFISK BA VALVE COMP. GEKA	0 0	0 0	0 0	0	0 0		0 0	0 0	0	0 (	0 0	0	0 0	0 0		0	0 0	0	0 0		0	0 0	0	0	0			0	0	0	0 0	0	0	0 0	0
	NILFISK BA VALVE COMP. NITO	0 0	0 0	0 0	0	0 0	0	0 (	0 0	0	0 (	0 0	0	0 0	0 (	0 0	0	0 0	0	0 0	0	0	0 0	0	0	0			0	0	0	0 0	0	0	0 0	0
	NILFISK BA VALVE WO COUPLER	0 0	0 0	0.0	0	00	0	0 0	0 0	0	0 (	0 0	0	0 0	0 (	0.0	0	0 0	0	0 0	0	0	0 0	o 0	0	0			0	0	0	0 0	0	0	0 0	0
	TWO USER DISTRIBUTOR																										0	0 1	0							
		_		-						-		•																								
	WATER INLET HOSE 3/4 P/	0 0	0 0	0 0	0	0 0	0	0 (	0 0	0	0 (	0 0	0	0 0	0 0	0	0	0 0	0	0 0	0	0	0 0	0	0	0	0	0	0 0	0	0	0 0	0	0	0 0	0
	Hose Reel  CLEANING TROLLEY SS W/HOSE REEL FOAM IN	0 0	•••		•••	• • •	•••	• • •	•••	•••				•••	• • •	•••	•••	• • •	• • •		•••		•		• •	•••	• • •	•••	.   .	• • •		•••				• • •
)	CLEANING HOLLET 33 WHOSE REEL FOAM IN	0.0		-		-							-				-	-																	-	
	HOSE GUIDE FOR MC 3-4			C	0	0 0	0								0 0	0 0	0	0		·····•																
	HOSE REEL COMPLETE							0 (	0 0	0	0 (	0 0	0	0 0				0	•	0		0	• (	<b>.</b>	0	0										
																				·····•																
	HOSE REEL FOR MC 3-4				•	0 0	•								0 0	•	0	•																		
	HOSE REEL KIT																																			
)							-				······																		-	-		-				

MH 4M-200/960 FAX MH 4M-210/1000 PAX MH 4M-220/1000 FAX MH 4M-220/1000 FAX MH 5M-220/1000 FAX MH 5M-220/1000 FAX MH 5M-210/100 FAX MH 5M-210/100 FAX MH 5M-210/1100 FAX MH 6M-175/1250 FAX MH 6M-175/1250 FAX MH 6M-175/1250 FAX MH 6M-2200/1300 FAX MH 7P-180/1260 FAX	SC UNO 4M-140/620 PS SC UNO 5M-160/720 PS SC UNO 5M-200/1050 SC UNO 5M-200/1050 SC UNO 6P-160/2500 SC UNO 6P-160/2500 SC UNO 6P-160/2000 SC UNO 6P-160/2000 SC UNO 7P-180/1020 SC UNO 7P-180/2000 SC UNO 7P-180/200 SC UNO 7P-180/	SH AUTO SM-100/500 E  MC 22 (180/770 PEYT  MC 4C 22 0770 PEXT  MC 4C 22 0770 PEXT  MC 5C 280/100 PE  MC 5C 280/100 PE  MC 5C 280/100 PE  MC 5M 280/110 PE (63 PE  MC 5M 280/110 PE (64 PE  MC 5M 280/110 PE PEUS  MC 7P-220/110 PE  MH 5W-220/110 PE  MH 7P-220/110 PE	Item no.
0000000000000000	0000000000000000000	000000000000	4810219
000000000000000	000000000000000000	000000000000	4810213
00000000000000	0000000000000000000	0 0 0 0 0 0 0 0 0 0 0 0	4810214
••	00000		101406186
0 •			101406187
	0 0		1716
		0 0	101118105
• • • • • • • • • • • • • • • • • • • •	000000	0 0 0 0 0 0 0 0 0	106411177
000000000000000000000000000000000000000	0000000	0 0 0 0 0 0 0 0 0 0 0 0	106411179
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0000000	0000000000000	106411178
000000000000000000000000000000000000000	0000000	0000000000000	106411184
			4809131
000000000000000000000000000000000000000	000000000000000000000000000000000000000	000000000000	6465
000000000000000000000000000000000000000	000000000000000000000000000000000000000	000	6401094
			107145800
			106403143
			107145803
	0 0 0 0		301001310
			_

<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

Hose Reel	MC 2C-120/520 T MC 2C-120/520 XT MC 2C-140/610 XT	MC 2G-150/650 MC 2G-150/650 XT	MC 3C-150/660 MC 3C-150/660 XT	MC 3C 126/770	MC 3C-170/820 MC 3C-170/820 XT	MC 5M-180/840 MC 5M-180/840 XT	MC 5M-200/1000	MC 5M-200/1000 XI	MC 5M-200/1050 FA	MC 5M-220/1130	MC 5M-220/1130 FA MC 5M-220/1130 XT	MC 4M-140/620 MC 4M-160/620	MC 4M-160/620 XT	MC 4M-180/740 MC 4M-180/740 XT	MC 6P-170/1600 FA MC 6P-170/1600 FAXT	MC 6P-180/1300 FA	MC 6P-180/1300 FAX1 MC 6P-200/1100 FAXT	MC 6P-250/1100 FA MC 6P-250/1100 FAXT	MC 7P-195/1280 FA	MC 7P-195/1280 FAXT MC 7P-195/1280 FBFA	MC 7P-195/1280 FFA	MC 8P-160/2500	MC 8P-160/2500 ST MC 8P-180/2100	MH 3C-145/600 PA	MH 3C-145/600 PAX	MH 3C-180/780 PAX	MH3M-140/580 PA	MH 3M-140/380 FAA 230/ 1/30 EU MH 3M-160/770 PA	MH 3M-160/770 PAX 400/3/50 EU	MH 4M-130/720 FA MH 4M-180/860 FA	WITH HIVE TOOLOGO
HOSE REEL NILFISK ACCESSORY																								0	• c	o •	0 0	0	0	0 0	, (
HOSE REEL RETRACTABLE SS W/O HOSE	0		~ .			•		_							2 0	2 (	~ ^	2 0				2 4	2 0		~ (		~ .	2 0		~ <i>(</i>	
HOSE REEL RETRACTABLE 33 W/O 1103E	O	0		000	) 0	0	0		0	0	0				0 0		0 0	0 0					5 6		0 0	0 0	0	) 0		0 0	
HOSE TROLLEY UP TO 50 M 3/8			0 0	000	0 0	0 0	000	0 0	0 0	0	0 0	0		0	0 0	0 1	0 0	0 0	0	о с	) 0	0 (	0 0	0	0 0	0 0	0 (	0 0	0	о с	) (
																															L
HOSEREEL BLUE.PAINT RETRACTAB.W/20M HOSE	0	0	00	000	0 0	0	0	0	0	0	0 0	0 0	00	0 0	0	0	0	0	0	0	, 0	0 0	00	0	0 0	0 0	0 0	0 0	0	0 0	, (
																								ļ.,							
Spray Gun ERGO 2000 STANDARD W. HOSE SWIVEL	• • •	• •	• •	•		• •	• (	• •	• •	•	• •	• •	•	• •	• 0	•	• •	• •		• •	•		•	•	• •	•	• (	•	•	• •	,
-																															Ī
ERGO 2000 VARIO PRESS W. HOSE SWIVEL												0 0	00	0 0										-							
ERGO 3000 GUN W.SWIVEL LOCK+VARIO PRESS			0 0	00	0							0 0	00	0 0										Ī.,							L
HIGH FLOW SPRAY HANDLE						_																									ŀ
REP. KIT SWIVEL JOINT	000	0 0	0 0	0 0	0 0	0 C	0 0	0 0	0 0	0 0	0 0	0 0	000	0 0	0 0	0 1	0 0	0 0	0	0 0	0 0	0 (	0 0	0	0 0	0 0	0 (	0 0	0	0 0	)
•		-	-																					1							ļ
SPRAY HANDLE W. SWIVEL LOCK	000	0 0	0 0	0 0	0 0	0 0	) 0 (	0 0	0 0	0	0 0	0 0	0 0	0 0	0 •	0 1	0 0	0 0	0	0 C	) 0	• (	• 0								
																															-
WINTER GUN 12 BAR																								ļ							ļ
																		.,.						l.,							
Other	000	0 0	00	000	0 0	0 C	00	0 0	0 0	0	0 0	0 0	000	0 0	0 0	0 1	0 0	0 0	0	0 0	0	0 (	0 0	0	0 0	0 0	0 (	0 0	0	0 0	)
BRACKET F. DETERGENT TANK 2.5L												0	•	• •																	L
																								ļ.,							
CHIMNEY ADAPTOR B2/B2.5 ACCESSORY																								0	0 0	0 0				0 0	) (
															·····•																-
CRANE LIFTING EYE											_							_													
•																															
CRANE ROUNDSLING 1000KG 50CM						0 0	000	0	0 0	0	0 0				0 0	0 (	0 0	0 0	0	0 0	0			-	_						
																															Ì
EXHAUST PIPE 148X197																															
FRONT WHEEL KIT						0.0	000	2 0	0.0	0	0 0				0 0	0 (	2 0	0 0	. 0	0 0				Ţ.,							Ì.

																			۱			ı		ı	l	ı	l		۱		۱	۲	۱			۱	ı	۱			۱	ı	ı			۱		ı									
MH 4M-200/960 FA MH 4M-200/960 FA	MH 4M-210/1000 PAX	MH 4M-220/1000 FAX	MH 4M-220/1000 FAX	MH 5M-200/960 FA	MH 5M-200/960 FAX	MH 5M-210/1100 FA	MH 5M-210/1100 FAX	MH 5M-210/1100 PAX	MH 5M 180/800 PA	MH 5M 180/800 PA	MH 6P-175/1250 FA	MH 6P-175/1250 FAX	MH 6P-200/1300 FA	MH 6P-200/1300 FAX	MH 7P-180/1260 FA	MH 7P-180/1260 FAX	MH 8P-180/2000 FA	MH 8P-18U/ZU0U FAX	SC UNO 4M-140/920 PS SC UNO 4M-160/720 PS	SC UNO 5M-200/1050	SC UNO 5M-200/1050 L	SC UNO 6P-160/2500	SC UNO 6P-170/1610	SC UNO 6P-200/1900	SC UND 7P-180/1200	SC DUO 6F-170/3220	SC DUO 6P-200/3800	SC DUO 7P-180/2400	SC DELTA 6P 160/4500-3 EU	SC DELTA 6P 160/6000-4 EU	SC DELTA 6P 160/9000-6 EU	SC DELIA 8F 100/15000-4 400/3/50 EU SC DELIA 8P 100/15000-6 400/3/50 EU	SC DELTA 8P 100/7500-3 400/3/50 EU	SH SOLAR 7P-170/1200 D	SH SOLAR 7P-170/1200 DSS	SH SOLAR 8P-180/2000 D	SH SOLAR 7P-135/875 E18 SH SOLAR 7P-170/1200 E18	SH SOL AR 7P-170/1200 E18	SH SOLAR 7P-170/1200 E54	SH SOLAR 5M-150/1020 G	SH SOLAR 7P-170/1200 G	SH TRUCK 5M-180/970 SH TRUCK 7P-175/1360	SH AUTO 5M-100/500 DSS	SH AUTO 5M-100/500 E	MC 2C-160/740 PET	MC 3C 180/770 PET	MC 4C 220/770 PEXT	MC 5C 280/1000 PE	MC 5C 280/1000 PEXT	MC 5M-195/1000 DE	MC 5M 280/1100 PE	MC 5M 280/1100 PE Cage MC 7P-220/1120 PE PILIS	MH 5M-200/1000 DE	MH 7P-220/1120 PE	MH 7P-220/1300 DE	Item no.	
0 •	•	• 0	•	0	•	0	•	•	0	0	0	•	0	•	0	•	0 •	•				·····•		····•									<b>.</b>			<u>.</u>					·····•									•	·····-				· · · · · ·	10640	0
0 0	) C	0	0	0		0			0	0	0	-	0		0	0	0																																	-						10640	0
0 0	) c	) 0	0	0		0			0			0	0	0	0	0	0 0	5							c	) c	0								0	0 0	0 0	. 0	0	0	0				0	0	0.0	0 0		0	0	0 0	. 0		0	640	0
0 0	) C		. 0	0		0		•	0	0	0	-	0		0		0 0	2		0		0	0	0 0	o c	) c	0	0																	-					-					-	1064	0
• • •			•	• •	••	•••	• •	•••	••	• •	••	• •	• • •	• • •	• • •		• •	-		• •	• • •	• • •	•	• •			••	• • •		••	• • •		••	• • •		••			•	• • •			•••	• • •		••	•	• • •	•••	• • •	• • •		• •	• • •	•••		
• •	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•		•		• 0	) C	0	0	0	0 (	0				0	0 0	0 0		0	0	0	• •			•	•	• •	•	•	•	•	• •	•	•	•	10640	
												-			·····•					0	0		0	(	0																															10640	0
								•				-			·····•		····•			0	0	0	0	0 0	o c	) C	0	0	0	0 (	0 0	) C	0	0	0	0				0	0												0	0	0	1064	0
															<u>.</u>		• •	•		0	0	•	0 (	• (	0							) C	0			<u>.</u>					·····•									-						10640	0
0 0	) C	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0 0	5		0	0	0	0	0 0	0 0	) c	0	0	0	0 (	0 0	<b>)</b>	0	0	0	0 0	0 0	0	0	0	0	0			0	0	0 (	0 0	0	0	0	0 0	0	0	0	10111	1
				0		0			0	0	0	0	0	0	0	0	0 0	0	0 0	0	0	0	0	0 0	o c	) c	0	0	0	0 (	0 0	) C	0	0	0	0 0	0 0	0	0	0	0	0 0	)										0	0	0	10640	0
								•				-			······•																		···•			<b>.</b>							•	•												10640	0
• • •				• •	•	• •		• •	• •	• •	•	• •	• • •	• • •			• •				• • •						••	• • •			• • •		• •	• • •					••	• • •			••	• • •		••			••	• • •			• •	• • •			
0 0	) C	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0	0 0	o c	) C	0	0	0	0 (	0			0	0	0 0	0 0		0	0	0	o c			0	0	0 (	0	0	0	0	0 0		0	0	1064	
												-			·····•																																									10714	4
0 0	) C	0	0																			·····•		····•							····•					<b>.</b>														•						10640	0
-				0	0	0	0	0	0	0																							_											-					-							30100	0
										-					·····•																																									10640	0
				0		0				-	0	0	0	0	0	0	0 0	2																0	0	0				0	0															30100	0
																																	_								· · · · · ·															10640	

Standard accessories
 Supplementary accessories
 Supplementary and mountable accessories

Other	MC26;120;201 MC26;120;201 MC26;150;650 MC26;150;660 MC36;150;660 MC36;150;660 MC36;150;660 MC36;150;660 MC36;150;660 MC36;150;660 MC36;150;60 MC36;170;200 MC3	MC 5W-180/240 XT MC 5W-200/1000 XT MC 5W-200/1000 XT MC 5W-200/1000 XT MC 5W-200/1000 XT MC 5W-200/1050 AC MC 5W-200/1130 AC MC 5W-220/1130 AC MC 5W-20/1130 AC MC 5W-2	MC 4M-160/G20 XT MC 4M-180/G20 MC 4M-180/G20 MC 6P-170/1600 FA MC 6P-170/1600 FAXT MC 6P-180/1300 FAXT MC 6P-180/1300 FAXT MC 6P-200/1100 FAXT MC 6P-250/1100 FAXT	MC 7H-195/1280 FFAX I MC 7P-195/1280 FFAX I MC 8P-160/2500 ST MC 8P-160/2500 ST MC 8P-160/2500 ST MC 8P-180/2700 PAX MH 3C-145/600 PAX MH 3C-145/600 PAX MH 3C-145/600 PAX MH 3M-140/580 PAX MH 3M-140/580 PAX MH 3M-160/770 PAX MH
HOUR COUNTER 50HZ (MECHANICAL) ACCESSOR	(			0.0
LIFTING DEVICE FOR MH 3/4 ACCESSORY				00000000
MANOMETER MC 4		0 0	000	
WATER REGULATION CPL. MC 4M		00	000	
WATER SUCTION KIT 300 L/MIN 06			0 (	000000000
Tornado Lance TORNADO PLUS 630 STRAIGHT W/O NOZZLE	0000000000	000000000000000000000000000000000000000	00000000000	000000000000000
TORNADO PLUS 1000 BEND W/O NOZZLE	0000000000	000000000000000000000000000000000000000	00000000000	000000000000000
TORNADO PLUS 1120 BEND W/O NOZZLE	0000000000	000000000000000000000000000000000000000	000000000000000000000000000000000000000	• • • • • • • • • • • • • • • • • • • •
TORNADO PLUS 2080 BEND W/O NOZZLE	000000000	000000000000000000000000000000000000000	00000000000	000000000000000000000000000000000000000
PowerSpeed Vario Lance POWERSPEED VARIO PLUS 770 BEND 0500		0000	0 0	
POWERSPEED VARIO PLUS 770 BEND 0640				
POWERSPEED VARIO PLUS 1090 BEND 0370	0000000		0 0	0 0
POWERSPEED VARIO PLUS 1090 BEND 0450	0			0000
POWERSPEED VARIO PLUS 1090 BEND 0500		0000	0 0	
POWERSPEED VARIO PLUS 1090 BEND 0530		000		
POWERSPEED VARIO PLUS 1090 BEND 0640				
POWERSPEED VARIO PLUS 1090 BEND 0680			00 0	000
POWERSPEED VARIO PLUS 1090 BEND 0950			0 0	

																															וום שלציע	3/3/50 EU	3/50 EU																										
MH 4M-200/960 FA	MH 4M-210/1000 PAX	MH 4M-220/1000 FA	MH 4M-220/1000 FAX	MH 5M-200/960 FA	MAIL 5101-200/300 170	MH 5M-210/1100 FAX	MH 5M-210/1100 PAX	MH 5M 180/800 PA	MH 5M 180/800 PA	MH 6P-175/1250 FA	MH 6P-175/1250 FAX	MH 6P-200/1300 FA	MH 6P-200/1300 FAX	MH 7P-180/1260 FA	MH 7P-180/1260 FAX	MH 8P-180/2000 FA	MH 8P-180/2000 FAX	SC UNO 4M-140/620 PS	SC UNO 4M-160/720 PS	SC UNO 5M-200/1050	SC UNO 5M-200/1050 L	SC UNO 6P-160/2500	SC UNO 6P-1/0/1610	SC UINO 7P-180/1200	SC DITO 6P-160/5000	SC DUO 6P-170/3220	SC DUO 6P-200/3800	SC DUO 7P-180/2400	SC DELTA 6P 160/4500-3 EU	SC DELTA 6P 160/6000-4 EU	SC DELTA BP 100/10000-0 EU	SC DELTA 8P 100/15000-4 400	SC DELTA 8P 100/7500-3 400/3/50 EU	SH SOLAR 7P-170/1200 D	SH SOLAR 7P-170/1200 DSS	SH SOLAR 8P-180/2000 D	SH SOLAR 7P-135/875 E18	SH SOLAR 7P-170/1200 E18	SH SOLAR 7P-1 70/1200 E36	SH SOLAR 5M-150/1020 G	SH SOLAR 7P-170/1200 G	SH TRUCK 5M-180/970	SH TRUCK 7P-175/1260	SH AUTO 5M-100/500 DSS	SH AUTO 5M-100/500 E	MC 2C-160/740 PET	MC 3C 180/ //0 PET	MC 4C 220/7/0 PEXT	MC 5C 230/940 PE	MC 5C 280/1000 PE	MC 5C 280/1000 PEXT	MC 5M 280/1100 PE	MC 5M 280/1100 PF Cage	MC 7P-220/1120 PE PLUS	MH 5M-200/1000 DE	MH 7P-220/1120 PE	MH 7P-220/1300 DE		item no.
0 0	0	0	0															 L		<b>-</b>																······•		····•		···•							· · · · · ·											106	64031
0 0	0	0	0										-		-			<u> </u>																-																					-			106	6403
															-			<u> </u>																						···•																		10	7142!
							•													····•																		····•																				10	7142
0 0	0 0	0	0							0	0	0		0	0					0	0			c	)				0	0 0	) c	) C	0	0	0			0 0	0 0	) )		0									c	)		0			0	6	64020
•••		• • •			•	•	• •	•••	•••	•••	• •	•••	•••		•				•							• •	• • •		••	•			• •	•••	• • •		••	• •			•••	• •	• • •	• • •			• •	•						•••	• • •			••••	6403
00							_								-											_																-												0	-				
-							-																0 0															····•		0														•					6403
0 0		0	0	• •			•	0		•	•	•	•	•	•	•	•	0	0	•	• (	•	• •					0						0	0	0	0	0 0	0 0	0	0		•			0	0 0	0 0	0 0		) 0	, 0	) C	0	•	•	•	106	64030
0 0	0	0	0	0 0		0	0	0	0	0	C	0	0	0	0	0	0	0	0	0	0 0		) C	) C		0	0	0						0	0	0	0	0 0	0 0	0	0	0	0			0	0 0	0 0	0 0	o (	2 0	, 0	) C	0	0	0	0	106	6403
																		<u> </u>		····•																·····•				···•															-	0		106	5403
																		l													_				-		_	<u>.</u>				_													-		0	106	54030
-																		<u> </u>																	-											0		(	0 0	<b>)</b>	D.				-			106	54030
															-																				-																	0	)		0			106	54030
																		<u> </u>																																				0		0		106	54030
																																					0																					106	54030
-																												0																													0	106	54030
												0		0	0																			0	0			0 0	0 0	<b>)</b>	0																	106	54030
																		 		····•										_		_				<u>.</u>																			-			104	6403 <sup>-</sup>

<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

	ζτ κτ κτ κτ κτ κτ κτ κτ κτ κτ κ
PowerSpeed Vario Lance POWERSPEED VARIO PLUS 1090 BEND 1200	MC 2C-120/520 T  MC 2C-120/520 T  MC 2C-120/520 XT  MC 2C-120/520 XT  MC 2C-150/650  MC 2C-150/650  MC 2C-150/650  MC 3C-150/650 XT  MC 5M-250/1130 MC AM-160/550 PAX  MC 6M-120/100 FAX  MC 7M-120/100 FAX  MC 7M-120
POWERSPEED VARIO PLUS 1090 BEND 1590	0 0
FlexoPower Lance FLEXOPOWER PLUS 960 BEND W/O NOZZLE	000000000000000000000000000000000000000
FLEXOPOWER PLUS 960 W/O NOZZLE BLUE	000 • 000000000000000000000000000000000
FLEXOPOWER PLUS 990 BEND W/O NOZ.	000000000000000000000000000000000000000
FLEXOPOWER PLUS 990 W/O NOZZLE BLUE	
FLEXOPOWER PLUS 1120 W/O NOZZLE BLUE	
Universal Lance UNIVERSAL PLUS 650 W/O NOZZLE STRAIGHT	000000000000000000000000000000000000000
UNIVERSAL PLUS 1080 W/O NOZZ STRAIGHT	000000000000000000000000000000000000000
UNIVERSAL PLUS 1080 BENT 170 F. BRUSH	0000000
UNIVERSAL PLUS 1560 W/O NOZZLE STRAIGHT	
UNIVERSAL PLUS 2060 W/O NOZZLE STRAIGHT	000000000000000000000000000000000000000
UNIVERSAL PLUS LANCE 940 BEND W/O NOZZ	
UNIVERSAL PLUS LANCE 1080 BEND W/O NOZZ	
UNIVERSAL PLUS LANCE 1230 BEND W/O NOZZL	
TurboHammer Lance TURBOHAMMER PLUS 950 STRAIGHT W12 0350	0 00
TURBOHAMMER PLUS 1115 STRAIGHT W12 0400	00000
TURBOHAMMER PLUS 1125 STRAIGHT W11 0550	

<sup>●</sup> Standard accessories
O Supplementary accessories
□ Supplementary and mountable accessories

9966 FA 9966 FA 1000 FAX 1000 FAX 11000 FAX 11100 FAX 11100 FAX 11100 FAX 11100 FAX 11100 FAX 11100 FAX 11100 FAX 11200 FAX 1200 FAX	SC UNO 4M-140/620 PS  SC UNO 4M-140/620 PS  SC UNO 5M-200/1050  SC UNO 5M-200/1050  SC UNO 5M-200/1050  SC UNO 5M-200/1050  SC UNO 6P-160/2500  SC UNO 6P-170/1610  SC UNO 6P-170/1610  SC UNO 6P-170/1500  SC UNO 6P-170/1500  SC UNO 6P-170/3220  SC	SC DELTA RP 1007/300-3 400/3/50 EU SH 501-AR 7P-1701/200 DSS SH 501-AR 7P-1701/200 DSS SH 501-AR 7P-1701/200 DSS SH 501-AR 7P-1701/200 EB SH 701-CK 5M-180/390 DSS SH 701-CK 5M-180/390 EB MC 2A 1807/70 PET MC 2A 1807/70 PET MC 3C 1807/70 PET MC 5C 2807/100 PE MC 5C 2807/100 PE MC 5C 2807/100 PE MC 5M 2807/100 PE MM 5M-2007/100 PE MM 7P-2207/120 PE MH 7P-2207/120 PE	ä
MH 4M-200/360 FA MH 4M-200/360 FA MH 4M-220/1000 FAX MH 4M-220/1000 FAX MH 5M-200/360 FAX MH 5M-200/360 FAX MH 5M-200/360 FAX MH 5M-210/1100 FAX MH 6P-175/1250 FAX MH 6P-175/1250 FAX MH 6P-2200/1300 FAX MH 6P-2200/1300 FAX MH 7P-180/1756 FAX	SC UNO 4M-140/620 PS SC UNO 4M-140/620 PS SC UNO 5M-200/1050 UNO 5M-200/1050 UNO 5M-200/1050 UNO 5M-140/620 OS SC UNO 6P-170/610 SC UNO 6P-180/200 SC UNO 6P	SC DELTA BP 1007/500 SH SQLAR PP-170/1200 SH SQLAR BP-170/1200 SH SQLAR PP-170/1200 SH SQLAR	Item no.
0.6	) -	0	106403111
			106403112
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0 • • 0 0 0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	106402282
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	00000000000		106408229
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	00000000000	000000000000000000000000000000000000000	106402281
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	00000000000	000000000000000000000000000000000000000	106408228
000000000000000000000000000000000000000	00000000000	000000000000000000000000000000000000000	106408227
000000000000000000000000000000000000000			106403032
000000000000000000000000000000000000000	000000000000	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	106403033
0 0		••	106403037
000000000000000000000000000000000000000	00000000000	000000000000000000000000000000000000000	106403031
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	00000000000	000000000000000000000000000000000000000	106403030
000000000000000000000000000000000000000	00000000000		106403036
000000000000000000000000000000000000000	00000000000	000000000000000000000000000000000000000	106403035
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	00000000000		106403034
	0 0		106403077
0 0	0 0	•	106403002
0 0 0		0 0	106402292

Standard accessories
 Supplementary accessories
 Supplementary and mountable accessories

					///50 EU
	MC 2C-120/520 T MC 2C-120/520 XT MC 2C-120/620 XT MC 2C-150/650 MC 2C-150/650 XT MC 3C-150/660 XT MC 3C-150/660 XT MC 3C-150/670 MC 3C-170/820 XT MC 3C-170/820 XT	MC 5M-180/840 MC 5M-180/840 XT MC 5M-200/1000 XT MC 5M-200/1050 FA MC 5M-200/1050 FA MC 5M-200/1050 FA MC 5M-200/1050 FA MC 5M-200/1130 FA MC 5M-220/1130 FA	MC 4M-140/620 MC 4M-160/620 MC 4M-160/620 MC 4M-180/740 MC 4M-180/740 MC 6P-170/1600 FAX MC 6P-170/1600 FAX MC 6P-180/1300 FAX MC 6P-180/1300 FAX	MC 64-2001/100 FAX MC 64-250/1100 FAXT MC 79-192/1280 FA MC 79-192/1280 FAX MC 79-192/1280 FEA MC 79-192/1280 FEA MC 79-192/1280 FEA MC 79-192/1280 FEA MC 79-192/1200 FA	MH 3C-145/600 PA MH 3C-145/600 PA MH 3C-145/600 PAX MH 3C-145/0780 PA MH 3M-140/380 PAX MH 3M-140/380 PAX MH 3M-160/770 PAX 400/3/50 EU MH 3M-160/770 PAX 400/3/50 EU MH 4M-130/720 FA
TurboHammer Lance TURBOHAMMER PLUS 1125 STRAIGHT W11 0450	000			0 0	0
TURBOHAMMER PLUS 1125 STRAIGHT W11 0500		0000		0 •	
TURBOHAMMER PLUS 1125 STRAIGHT W11 0700			0 •	0 • 0 0	
TURBOHAMMER PLUS 1130 STR./NOZ. W11 1000			0 •		
TURBOHAMMER PLUS 1130 STRAIGHT W12 0350	00000		000		0 0
TURBOHAMMER PLUS 1130 STRAIGHT W12 0500		0 • 0 0 •		0 0	
TURBOHAMMER PLUS 1125 STRAIGHT W11 0600					
4-in-1 Lance 4-in-1 Lance incl 0340 Aluminum HEAD			•		0 0
4-IN-1 LANCE INCL 0350 ALUMINUM HEAD			0		
4-IN-1 LANCE INCL 0370 ALUMINUM HEAD	• 0 • 0 •		0 •		0 0
4-IN-1 LANCE INCL 0400 ALUMINUM HEAD					00 00
4-IN-1 LANCE INCL 0435 ALUMINUM HEAD	000				0
4-IN-1 LANCE INCL 0450 ALUMINUM HEAD	0				0 0
LANCE FOR 4-IN-1 880 BEND					00000000
Short Lance					
DOUBLE LANCE L10CM 1505		00000			
DOUBLE LANCE SHORT 1506 100MM					
DOUBLE LANCE W/O NOZZLE 90MM	0000000000	000000000	000000000	0000000000	00000000
SINGLE LANCE W/O NOZZLE 90MM			000000000		

								ļ														ļ	ļ													ļ	ı	į							1-	ı			į									
MH 4M-210/1000 PAX MH 4M-210/1000 PAX	MH 4M-220/1000 FA	MH 4M-220/1000 FAX MH 5M-200/960 FA	MH 5M-200/960 FAX	MH 5M-210/1100 FA	MH SM-Z10/1100 FAX	MH 5M 180/800 PA	MH 5W 180/800 FA	MALL COUNTY OF COUNTY	MH 6P-1/5/1/250 FA	MH 6P-175/1250 FAX	MH 6P-200/1300 FA	MH 6P-200/1300 FAX	MH 7P-180/1260 FA	MH 7P-180/1260 FAX	MH 8P-180/2000 FA	MH 8P-180/2000 FAX	SC UNO 4M-140/620 PS	SC UNO 4M-160/720 PS	SC UNO 5M-200/1050	SC UNO 5M-200/1050 L	SC UNO 6P-160/2500	SC IINO 6P-200/1900	SC 11NO 28-180/1300	SC DUO 6P-160/5000	SC DUO 6P-170/3220	SC DUO 6P-200/3800	SC DUO 7P-180/2400	SC DELTA 6P 160/4500-3 EU	SC DELTA 6P 160/6000-4 EU	SC DELTA 6P 160/9000-6 EU	SC DELTA 8P 100/10000-4 400/3/50 EU	SC DELTA 8P 100/15000-6 400/3/50 EU	SC DELTA 8P 100/7500-3 400/3/50 EU	SH SOLAR 7P-170/1200 D	SH SOLAR 7P-170/1200 DSS	SH SOLAN OF-180/2000 D	SH 50LAR 7F-135/875 E18	SH SOLAR 7P-170/1200 E36	SH SOLAR 7P-170/1200 E54	SH SOLAR 5M-150/1020 G	SH SOLAR 7P-170/1200 G	SH TRUCK 5M-180/970	SH TRUCK 7P-175/1260	SH AUTO 5M-100/500 DSS	SH AUTO 5M-100/500 E	MC 2C 100/740 PET	MC 3C 180/7/0 FEI	MC 5C 230/940 PE	MC 5C 230/340 LE	MC 5C 280/1000 PEXT	MC 5M-195/1000 DE	MC 5M 280/1100 PE	MC 5M 280/1100 PE Cage	MC 7P-220/1120 PE PLUS	MH 5M-200/1000 DE	MH 7P-220/1300 DE		Item no.
															·····•																																								0			1064022
000	0 0	0													·····•																																							0		)		1064022
													0	0													-														0																	1064022
															·····•		·····•																																									1064030
															·····•		0	0																													c	)										1064030
																			0	0							-4																				•											1064030
											····•																-		-																											0	-	1064022
		• • •		•	• • •					• •		• •			•••						••		•••		••	•••	••	• •	• • •		• • •	• • •	•		• •				••	• •	•	• • •	• • •						•••		••	•••	• • •				•••	1064082
											····•						0	0									-		-																													1064082
											····•				·····•																																											1064082
															·····•		·····•	0																																								1064082
															·····•																																											
			-												·····•													•																														1064082
																																																										1064082
000	0 0	0																																																								1064082
															· · · · · ·														-																													6400°
																	0	0									0																															64000
000	0 0	0 0	0	0	<b>&gt;</b> (	) c	) c	) (	0 (	0	o (	2	0	0	0	0	0	0	0	0	0 (	o c	) c	) 0	0	0	0	0	0	0	0	0	0	0	0 0	) (	<b>)</b> (	0	0	0	0	0	0		(	) (	) (		) (	0	0	0	0	0	0 (	0 0		1064021
000	0 (	0 0	0	0	· ·															0	0 1	2 0																									) c											1064021


<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

																														EU	=		
	MC 2C-120/520 T MC 2C-120/520 XT	MC 2C-140/610 XT MC 2C-150/650	150/650 XT 150/660	150/660 XT	MC 3C-1507770 MC 3C-170/820 MC 3C 470/820 VT	MC 5M-180/840	MC 5M-180/840 XT MC 5M-200/1000	MC 5M-200/1000 XT	MC 5M-200/1050 FA	MC 5M-200/1050 XT	MC 5M-220/1130 FA	-220/1130 XT -140/620	-160/620	MC 4M-160/620 XT MC 4M-180/740	MC 4M-180/740 XT	MC 6P-170/1600 FA	180/1300 FA	MC 6P-180/1300 FAXT	250/1100 FA	MC 6P-250/1100 FAXT	MC 7P-195/1280 FAXT	MC 7P-195/1280 FBFA	195/1280 FFA	MC 8P-160/2500 MC 8P-160/2500 ST	180/2100	MH 3C-145/600 PA	145/600 PAX	MH 3C-180/780 PA MH 3C-180/780 PA X	140/580 PA	MH 3M-140/580 PAX 230/1/50 EU	-160/ / / / PA -160/770 PA X 400/3/50	MH 4M-130/720 FA	100,000,00
Special Lance	MC 2G	MC 2G	MC 2C- MC 3C-	MC 3C-	MC 3C-	MC 5M	MC 5M MC 5M	MC 5M	MC 5M	MC 5M	MC 5M	MC 5M	MC 4M	MC 4M	MC 4M	MC 6P-	MC 6P-	MC 6P-	MC 6P-:	MC 6P-	MC 7P-	MC 7P-	MC 7P-	MC 8P-	MC 8P-	MH 3C-	MH 3C-	MH 3C-	MH 3M	MH 3M	MH 3M	MH 4M	
CURVED LANCE L1090 MM	00	0 0	0 0	0 (	000	00	0 0	00	0	0 0	0 0	0 0	0	0 0	0	0 0	0	0 0	0	0 (	0	0	0	-		0	0	0 0	0	0	0 0	0	
LANCE SINGLE 1500MM W/O NOZZLE	0 0	0 0	0 0	0 (	000	0 0	0 0	0 0	0	0 0	0 0	0 0	0	0 0	0	0 0	0	0 0	0	0 (	0	0	0		-	0	0	0 0	0 0	0	0 0	0	
LANCE WITH BAYONET COUPLI									-																-								
UNDER CARRIAGE WASHER 40065	0 0	0 0	0 0	0 (	000	0 0	0 0	00	0	0 0	0 0	0 0	0	0 0	0	0 0	0	0 0	0	0 (	0	0	0		-	0	0	о с	0 0	0	0 0	0	
Delta Booster Lance SINGLE LANCE W/1511 BROWN L 160BAR	• • • • •		• • • •	•			•••		•••		••••	• • •			• • •		•••		• • •	••		•••		• • •	•••		••		•••	• •		•	
SINGLE LANCE W/1513 RED L 160BAR			_						_							<u>.</u>	_							_								-	
SINGLE LANCE W/1520 GREEN L 160BAR			_	_												<u>.</u>											_					-	
SINGLE LANCE W/15075 ORANGE L 160BAR									_																								
SINGLE LANCE BLACK .1530 27 BAR-2100L/H																·····•									-								
SINGLE LANCE BLUE .1508 80BAR-1020L/H												_								<u>-</u>					-							-	
SINGLE LANCE W/1506 SILVER 160BAR																<u>-</u>						-			-		_				•		
SINGLE LANCE W/1513 WHITE+YELLOW 100BAR																									-								
SINGLE LANCE W/1515 GREEN+YELLOW 100BAR																																	
SINGLE LANCE W/1530 BLACK+YELLOW 100BAR																									-								
SINGLE LANCE W/1531 BROWN+YELLOW 100BAR				_																				-	-								
SINGLE LANCE WHITE .1515 27BAR- 1020L/H																·····•									-								
SINGLE LANCE YELLOW.1511 107BAR-1560L/H																																	
TurboHammer Nozzle NOZZLE TURBOHAMMER HEAD .0450 W11										c	0 0	0	······																				

<sup>●</sup> Standard accessories
O Supplementary accessories
□ Supplementary and mountable accessories

																													a	2 -	,																					
MH 4M-200/960 FA	MH 4M-200/960 FAX MH 4M-210/1000 PAX	MH 4M-220/1000 FA	MH 4M-220/1000 FAX	MH 5M-200/960 FA	MH 5M-200/960 FAX	MH 5M-210/1100 FA	MILL SIMPLE TO THOU THE	MH 5M 180/800 PA	MH 5M 180/800 PA	MH 6P-175/1250 FA	MH 6P-175/1250 FAX	MH 6P-200/1300 FA	MH 6P-200/1300 FAX	MH 7P-180/1260 FA	MH 7P-180/1260 FAX	MH 8P-180/2000 FA	SC UNO 4M-140/620 PS	SC UNO 4M-160/720 PS	SC UNO SIM-200/1050	SC UNO 6P-160/2500	SC UNO 6P-170/1610	SC UNO 6P-200/1900	SC DUO 6P-160/5000	SC DUO 6P-170/3220	SC DUO 6P-200/3800	SC DUO 7P-180/2400 SC DELTA 6P 160/4500-3 EU	SC DELTA 6P 160/6000-4 EU	SC DELTA 6P 160/9000-6 EU	SC DELTA 8P 100/10000-4 400/3/50 EU	SC DELIA 8P 100/15000-8 400/3/50 EU SC DELIA 8P 100/7500-3 400/3/50 EII	SH SOLAR 7P-170/1200 D	SH SOLAR 7P-170/1200 DSS	SH SOLAR 8P-180/2000 D	SH SOLAR 7P-133/6/3 E16	SH SOLAR 7P-170/1200 E36	SH SOLAR 7P-170/1200 E54	SH SOLAR 7P-170/1200 G	SH TRUCK 5M-180/970	SH TRUCK 7P-175/1260	SH AUTO SM-100/500 DSS	MC 2C-160/740 PET	MC 3C 180/770 PET	MC 4C 220/770 PEXT	MC 5C 280/1000 PF	MC 5C 280/1000 PEXT	MC 5M-195/1000 DE	MC 5M 280/1100 PE	MC 5M 280/1100 PE Cage	MC 7P-220/1120 PE PLUS MH 5M-200/1000 DF	MH 7P-220/1120 PE	MH 7P-220/1300 DE	Item no.
0 (	0 0	0	0	0	0 (	0 0	) (	0	0	0	0	0	0	0	0 0	o c	0	0 (	o c	0	0	0 0	0	0	0 1	0 0	0	0	0 0	o c	0	0	0 0	0	0	0 0	0	0	0		0	0	0 0	o 0	0	0	0	0 0	o c	0	0	64
0 (	o c	0	0	0	0 (	0 0	) (	0	0	0	0	0	0	0	0 0	o 0	0	0 (	) C	0	0	0 0	0	0	0 1	0 0	0	0	0 0	o c	0	0	0 0	0 0	0	0 0	0	0	0		0	0	0 0	) C	0	0	0	0 (	o c	0	0	64
																										0	0	0	0 0	0																						1064
0 (	0 0	0		0	0 (	0 0	o (	> 0	0	0	0	0	0	0	0		0	0 (	) c	0	0	0 0	) 0	0	0 1	0					0	0		0	0	0 0	0	0	0		0	0	0 0	) c	. 0	0	0	0 (	o c	0	0	64
• • •	• • •	••	• • •	•	•••	• • •	•	•••	• •		•	• • •		· • •	•					• •		• • •	• •	• • •		•••	• • •	• • •	•	• • •	••	• • •	••	•••		• • •	••	• • •	••			• • •			••	• •	• • •		• • •	••	• • •	• • • • • • •
-																• • • • • • • • • • • • • • • • • • •										0	0	0																								63
																<u>-</u>	<u></u>		<b>-</b>							0	0	0																								63
																										0	0	0																								63
																<u>-</u>			<b>-</b>							0	0	0																							-	63
	-										-															0	0	0																							_	63
																										0	0	0																								63
******																										0	0	0																								63
								<u>.</u>								···•													0 0	0 0						····•			····•													1064
																													0 0	0 0																						1064
	-																												0 0	0 0																						1064
-	-																												0 0	0 0																						1064
-	-					_																				0	0	0																								63
-																										0	0	0																							_	63
		••	• • •				•					• • •			•		ļ			•••		• • •		• • •			• • •	• • •				•	••				•	•	••			• • •			•	•				•	• • •	
														<b>.</b>			ļ																					0														•

Standard accessories
 Supplementary accessories
 Supplementary and mountable accessories

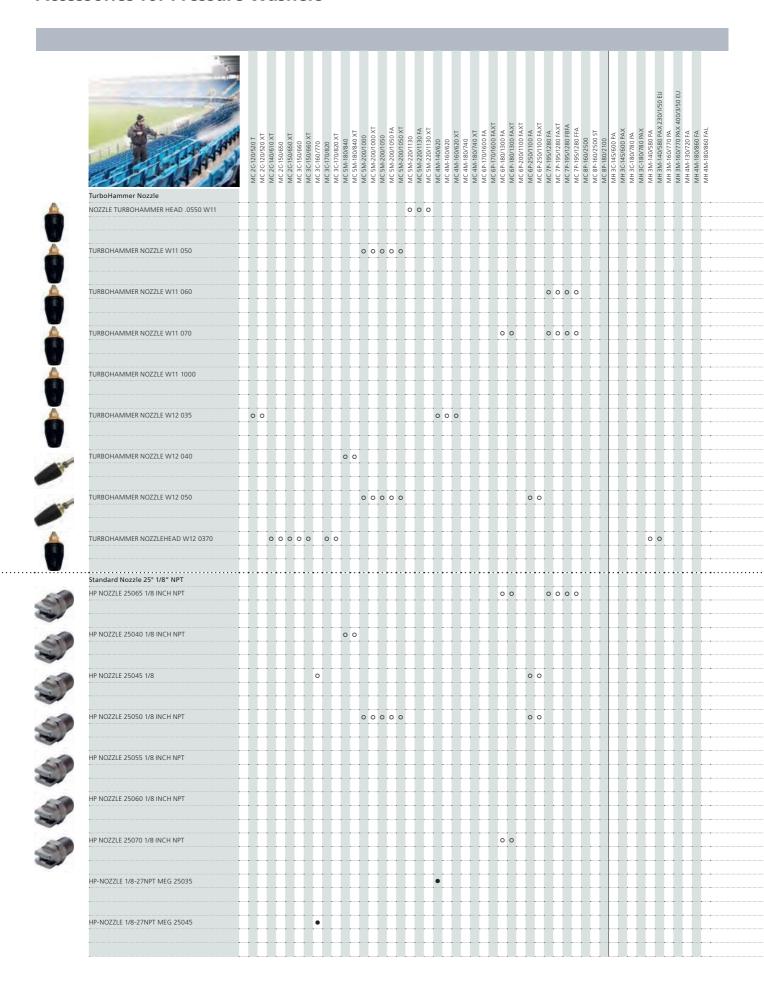

<sup>●</sup> Standard accessories
O Supplementary accessories
□ Supplementary and mountable accessories

FA FAX PPAX FAX FAX FAX FA	FAX PBX A A A A A A A A A A A A A A A A A A A	SC UNO 4M-140/200 FAX  SC UNO 4M-140/200 FS  SC UNO 4M-140/200 FS  SC UNO 5M-2000/1500  SC UNO 5P-160/2000  SC UNO 6P-100/1000  SC DUO 6P-100/1000  SC DUO 6P-100/1000  SC DUO 7P-180/1000  SC DELTA 6P-100/10000-4-400/19/100  SC DELTA 6P-100/10000-6-400/19/100  SC DELTA 6P-100/10000-6-400/19/100  SC DELTA 6P-100/10000-6-400/19/100  SC DELTA 6P-100/1000 BS  SC DELTA 6P-100/1000 BS  SH SOLAR 7P-170/1200 G  SH AUTO SM-100/1000 BS	ET EXT E E P P P P P P P P P P P P P P P P P	PPE DPE cage PE PLUS PE PE	
MH 4M+200/960 FA MH 4M+200/960 FAX MH 4M+2201000 FAX MH 4M+2201000 FAX MH 5M+200/960 FA MH 5M+200/960 FAX MH 5M+200/960 FAX MH 5M+200/960 FAX	MH 5M-210/1100 FAX MH MAN-210/1100 PAX MH 5M 180/800 PA MH 6P-175/1250 FA MH 6P-175/1250 FA MH 6P-200/1300 FA MH 7P-180/1260 FA MH 7P-180/1260 FA MH 7P-180/1260 FA	AC UNO 4M-140/200 PS SC UNO 4M-140/200 PS SC UNO 5M-200/1050 SC UNO 5M-200/1050 SC UNO 6P-1700/500 SC UNO 6P-1700/500 SC UNO 6P-1700/500 SC UNO 6P-1700/500 SC UNO 6P-1700/320 SC UNO 6P-1700/320 SC UNO 6P-1700/320 SC UNO 7P-180/200 SC UNO 7P-180/2	MC 2C-160/740 PET MC 3C 180/740 PET MC 3C 220/740 PET MC 5C 230/940 PE MC 5C 280/1000 PEXT MC 5C 280/1000 PEXT	MC 5M 280/1100 PE MC 5M 280/1100 PE Cage MC 7P-220/1120 PE PLUS MH 5M-200/1000 DE MH 7P-220/130 PE MH 7P-220/130 DE	Item no.
0	0 0	0			48875
		0.0		0	48872
		0 0			48982
		٥			4898
		•			102802850
		0 0	0		4928
	0 0	0 0	0		6543
		0 0			301001108
			0 000		106408221
		0 0			7815
					2504
					8528
				0	7813
		0			7814
		0 0			2506
					2507
					10714257
					107142579

<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

	Standard Nozzie 0° 1/8" NPT	MC 2C-120/520 T MC 2C-120/520 XT MC 2C-140/610 XT MC 2C-150/650	MC 2C-150/650 XT MC 3C-150/660 MC 3C-150/660 XT	MC 3C-150/700 MC 3C-170/820	MC 3C-170/820 XT MC 5M-180/840	MC 5M-180/840 XT MC 5M-200/1000	MC 5M-200/1000 XT MC 5M-200/1050 MC 5M-200/1050 FA	MC 5M-200/1050 XT	MC 5M-220/1130 MC 5M-220/1130 FA MC 5M-220/1130 XT	MC 4M-140/620	MC 4M-160/620 MC 4M-160/620 XT MC 4M 18/740	MC 4M-180/740 XT	MC 6P-170/1600 FA. MC 6P-170/1600 FAXT	MC 6P-180/1300 FA MC 6P-180/1300 FAXT	MC 6P-200/1100 FAXT	MC 6P-250/1100 FA MC 6P-250/1100 FAXT	MC 7P-195/1280 FA	MC 7P-195/1280 FAX1 MC 7P-195/1280 FBFA	MC 7P-195/1280 FFA	MC 8P-160/2500 MC 8P-160/2500 ST	MC 8P-180/2100	MH 3C-145/600 PA MH 3C-145/600 PAX	MH 3C-180/780 PA	MH 3C-180/780 PAX MH 3M-140/580 PA	MH 3M-140/580 PAX 230/1/50 EU	MH 3M-160/770 PA MH 3M-160/770 PAX 400/3/50 EU	MH 4M-130/720 FA	MH 4M-180/860 FA
THE	HP-NOZZLE 0040 1/8				0	0											-											
A PO	HP-NOZZLE 0050 1/8					0	000	0											-									
(M)	HP-NOZZLE 0060 1/8																								-		-	
A PO	HP-NOZZLE 0070 1/8													0 0														
	Standard Nozzle 15° 1/8" NPT HP NOZZLE 15050 1/8					0	000		000				• • •		•••	•••	•••								•••			
5	HP NOZZLE 15060 1/8																											
5	NOZZLE HIGH PRESSURE 15040 1/8 NPT				0	0																						
	Standard Nozzle 50° 1/8" NPT HP NOZZLE 50040 1/8				0	0					••••						• • •					•••			•••		•••	••
500	HP NOZZLE 50060 1/8 INCH NPT												•															
50	HP NOZZLE 50070 1/8													0 0														
	HP NOZZLE 50080 1/8																			_								
	Tornado Nozzle with Indication Ring NOZZLE 0275 W. INDICATION RING DARK BROW																•••		•••			• • •			•••	• • •	0 (	• ·
-	NOZZLE 0300 W. INDICATION RING WARM ORAN																										0 (	) C
-	NOZZLE 0340 INDICATION RING VIOLET	0 0								•	• 0		<u>.</u>			_				_	•	• •						
	NOZZLE 0350 INDICATION RING BORDEAUX	00	-	-						0						_												
	NOZZLE 0370 INDICATION RING BRONZE	0 •	0 • 0	)								• 0										•		•	•	•		
	NOZZLE 0400 INDICATION RING METAL GREY				•	•													-				•	•		• •	-	
-																								_				

<sup>●</sup> Standard accessories
O Supplementary accessories
□ Supplementary and mountable accessories

MH 4M-200/960 FA MH 4M-210/1000 PAX MH 4M-210/1000 FAX MH 4M-220/1000 FAX MH 5M-220/960 FAX MH 5M-220/960 FAX MH 5M-210/1100 FAX MH 5M 180/1800 PA	MH 6P-175/1750 FA MH 6P-175/1750 FAX MH 6P-200/1300 FA MH 6P-200/1300 FAX MH 7P-180/1760 FAX MH 7P-180/1760 FAX MH 8P-180/1760 FAX	MM HE STRUZUOU FAX  SC UNO 4M-140/620 PS  SC UNO 5M-200/1050  SC UNO 5M-200/1050  SC UNO 6M-150/720 PS  SC UNO 6M-150/720 PS  SC UNO 6M-7200/1050  SC UNO 6P-7200/1900  SC UNO 7P-180/7200	SC DUG 6F-700/3220 SC DUG 6F-700/3220 SC DUG 6F-700/3220 SC DELTA 6F 160/4500-3 EU SC DELTA 6F 160/4500-4 EU SC DELTA 8F 100/15000-6 EU SC DELTA 8P 100/15000-6 AUG/350 EU ST DELTA 8P 100/15000-6 AUG/350 EU ST DELTA 8P 100/15000-6 AUG/350 EU ST SC DELTA 8P 100/15000 B	SH SOLAR 7P-135/875 E18 SH SOLAR 7P-135/875 E18 SH SOLAR 7P-170/200 E18 SH SOLAR 7P-170/1200 E18 SH SOLAR 7P-170/1200 E54 SH SOLAR 7P-170/1200 E34 SH SOLAR 7P-170/1200 G SH SOLAR 7P-170/120 G SH SOLAR 7P-175/1200 SH TRUCK 5M-186/970 SH AUTO SK-175/1260 SH AUTO SK-105/900 DSS	MC 2C-1607740 PET MC 4C 220770 PET MC 4C 220770 PEXT MC 4C 220770 PEXT MC 5C 2807000 PE MC 5C 2807000 PE MC 5C 2807000 PE MC 5C 2807100 PE MC 5M 2807110 PE MM 7P-22071300 PE MM 7P-22071300 PE	Item no.
\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	* * * * * * *					
						15
					0	17
		0	0			7
						7
						41
			0			
		0				8
						5
		0	0			5
	0 0	0	0	000		5
			0			5
00000						101117
00000						101117
		•			•	101119
		0				101119
				• •		101119
		•				101119
						101115
						101119

<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

	MC 2C-120/520 T MC 2C-120/520 XT MC 2C-120/50 XT MC 2C-150/610 XT MC 2C-150/650 XT	MC 3C-150/660 MC 3C-150/660 XT MC 3C-160/770 MC 3C-170/820	MC 3C-170/820 XT MC 5M-180/840 MC 5M-180/840 XT	MC 5M-200/1000 XT	MC 5M-200/1050 MC 5M-200/1050 FA MC 5M-200/1050 XT	MC 5M-220/1130 MC 5M-220/1130	MC 5M-220/1130 XT MC 4M-140/620	MC 4M-160/620 XT MC 4M-180/740	MC 4M-180/740 XT MC 6P-170/1600 FA	MC 6P-170/1600 FAXT MC 6P-180/1300 FA	MC 6P-180/1300 FAXT MC 6P-200/1100 FAXT	MC 6P-250/1100 FA MC 6P-250/1100 FAXT	MC 7P-195/1280 FA MC 7P-195/1280 FA	MC 7P-195/1280 FBFA MC 7P-195/1280 FFA	MC 8P-160/2500	MC 8P-160/2500 ST MC 8P-180/2100	MH 3C-145/600 PA MH 3C-145/600 PAX	MH 3C-180/780 PA	MH 3C-180/780 PAX MH 3M-140/580 PA	MH 3M-140/580 PAX 230/1/50 EU MH 3M-160/770 PA	MH 3M-160/770 PAX 400/3/50 EU MH 4M-130/720 FA
ornado Nozzle with Indication Ring DZZLE 0450 INDICATION RING LIGHT BLUE																					
OZZLE 0500 INDICATION RING YELLOW				•••	• • •																
OZZLE 0530 INDICATION RING RED						••	•														
OZZLE 0550 INDICATION RING NEONGREEN											•										
IOZZLE 0640 INDICATION RING GREEN																					
NOZZLE 0650 INDICATION RING LIGHT GREEN																_					
NOZZLE 0680 INDICATION RING GREY										0	0	0	• •	• •	•	_					
IOZZLE 0700 INDICATION RING ORANGE										•	•										
OZZLE 0750 INDICATION RING RED					-				-	-				-							
NOZZLE 0850 INDICATION RING WHITE																					
NOZZLE 0900 INDICATION RING BROWN																					
NOZZLE 1000 INDICATION RING GRAPHITE																					
NOZZLE 1200 INDICATION RING CARAMELE									-	-						•					
NOZZLE + INDICATION RING 0600																_					
NOZZLE PROTECTION F. TORNADOL.	00000	0000	000	0000		000	000	000	0 0	0 0	0 0	0 0	0 0	000		0 0	0 0	0 (	0 0	0 0	0 0
IOZZLE TORNADO.1100 W.IND-RING ORANGE																_					-
TORNADO + NZLE 1590 1/8-27NPT															•	•					
ORNADO NOZZLE 0475												• •									
TORNADO NOZZLE 0950 DARK ROSE									•	•											

<sup>●</sup> Standard accessories
O Supplementary accessories
□ Supplementary and mountable accessories

MH 4M-200/960 FA MH 4M-200/960 FAX MH 4M-210/1000 PAX MH 4M-210/1000 PAX MH 4M-220/1000 FAX MH 5M-200/960 FAX MH 5M-200/960 FAX MH 5M-200/960 FAX MH 5M-210/100 FAX MH 5M-210/1100 FAX MH 6P-175/1250 FA MH 6P-175/1250 FAX MH 6P-175/1250 FAX MH 7P-180/1360 FAX MH 7P-180/1360 FAX MH 8P-180/2000 FAX MH 8P-180/2000 FAX MH 8P-180/2000 FAX MH 8P-180/2000 FAX	SC UNO 4M-140/620 PS SC UNO 4M-140/620 PS SC UNO SM-200720 PS SC UNO SM-20071050 SC UNO SM-20071050 SC UNO 6P-160/2500 SC UNO 6P-160/2500 SC UNO 6P-200/1900 SC UNO 6P-200/1900 SC UNO 6P-200/1900 SC UNO 6P-200/3800 SC UNO 6P-200/3800 SC DU 6P-200/	SH SOLAR PP-1707/200 DS SH SOLAR PP-1707/200 DS SH SOLAR PP-1707/200 DS SH SOLAR PP-1707/200 DS SH SOLAR PP-1707/200 E18 SH SOLAR PP-1707/200 E18 SH SOLAR PP-1707/200 E56 SH SOLAR PP-1707/200 G SH SOLAR PP-1707/200 G SH TRUCK SM-180/970 SH TRUCK SM-180/970 SH TRUCK SM-180/970 SH ALTO SM-100/500 DS SH ALTO SM-100/500 DS		Item no.
			• • 10	01119740
	• •		• • 10	01119741
		0	• 10	01119742
•••		0	10	01119743
	• 0		• 10	01119745
	0			01119746
••••	0	00 000 0	10	01119747
	0		10	01119748
••			10	01119749
	0		10	01119751
	• 0		10	01119752
	0			01119754
				U1113734
••	•		10	01119758
	0		10	01119744
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0 0 0	0 0 0 0 0 0 0 0 0 0 0 0 0 10	16402425
		0	10	01119756
			30	01150004
•••••			200	01150005
			30	
			10	01117655
				-

Standard accessories
 Supplementary accessories
 Supplementary and mountable accessories

								EU EU
Tornado Nozzle with Indication Ring	MC 2C-120/920 T MC 2C-120/920 XT MC 2C-140/610 XT MC 2C-150/650 MC 2C-150/660 MC 3C-150/660 MC 3C-150/660 XT MC 3C-160/770	MC 34-170/820 MC 34-170/820 XT MC 5M-180/840 MC 5M-180/840 XT MC 5M-280/800	MC 5M-200/100 X1 MC 5M-200/100 X1 MC 5M-200/1050 A MC 5M-200/1050 A MC 5M-220/1130 MC 5M-220/1130 A MC 5M-220/1130 A	MC 4M-140/620 MC 4M-160/620 MC 4M-160/620 MC 4M-180/740	MC 6P-170/1600 FA MC 6P-170/1600 FAX MC 6P-180/1300 FA MC 6P-180/1300 FAX	MC 6P-250/1100 FAXT MC 6P-250/1100 FAXT MC 7P-195/1280 FAX MC 7P-195/1280 FBAX MC 7P-195/1280 FBAX MC 7P-195/1280 FBA	MC 8P-160/2500 MC 8P-160/2500 ST MC 8P-180/2100 MH 3C-145/600 PAX MH 3C-145/600 PAX	MH 3C-1807/80 PAX MH 3M-140/580 PA MH 3M-140/580 PAX 2307/50 EU MH 3M-160770 PA MH 3M-160770 PAX 400/3/50 EU MH 4M-1307/20 FA
NOZZLE 1500 INDICATION RING OLIVE								
4-in-1 Nozzle NOZZLE 4-IN-1 ALU + INDICATION RING 0370	0 0							0 0
NOZZLE 4-IN-1 ALU + INDICATION RING 0400							0	0 00
NOZZLE 4-IN-1 ALU + INDICATION RING 0435		0 0						0
NOZZLE 4-IN-1 ALU + INDICATION RING 0450	0							
Special Nozzle								
CONTAINER CLEANING NOZZLE	000	00000	000000		00000	000		
NOZZLE - ROTARY W12 .0400				<u> </u>				
NOZZLE FOR LONG LANCEJET 6-7 M	000	00000	000000		0000	000000		
NOZZLE PROTECTION CAP PA	0000000	00000	000000	00000	00000	000000	00000	00000
VARIO NOZZLE HL-I 1/8-27N		0 0	0 0		00000	000000	000	0 000
VARIO-NOZZLE CASING 1/8	000	00000	000000	0000	00000	000000		
Nozzle NOZZLE 0165								0000
NOZZLE 0200								0000
NOZZLE 0245								0000
Filter Pressure Washer  CARTRIDGE FILTER REPLACEM. 50 uM	0000000	00000	000000	0000	00000	000000	00000	00000
FILTER - WATER/SAND. SS					00000	000		
FILTER CARTRIDGE 1 1/2								

<sup>●</sup> Standard accessories
O Supplementary accessories
□ Supplementary and mountable accessories

																									a :	2 3																						
MH 4M-200/960 FA MH 4M-200/960 FAX MH 4M-210/1000 FAX MH 4M-220/1000 FA	MH 4M-220/1000 FAX MH 5M-200/960 FA MH 5M-200/960 FA	MH 5M-210/1100 FA	MH 5M-210/1100 FAX	MH 5M 180/800 PA	MH 5M 180/800 PA	MH 6P-175/1250 FA	MH 6P-175/1250 FAX	MH 6P-200/1300 FA	MH 7P-180/1260 FA	MH 7P-180/1260 FAX	MH 8P-180/2000 FA	MH 8P-180/2000 FAX SC LINO 4M-140/620 PS	SC UNO 4M-160/720 PS	SC UNO 5M-200/1050	SC UNO 5M-200/1050 L	SC UNO 6P-160/2500	SC UNO 6P-200/1900	SC UNO 7P-180/1200	SC DUO 6P-160/5000	SC DUO 6P-170/3220	SC DUO 6P-200/3800	SC DELTA 6P 160/4500-3 EU	SC DELTA 6P 160/6000-4 EU	SC DELTA 6P 160/9000-6 EU	SC DELTA 8P 100/10000-4 400/3/50 EU	SC DELTA 8P 100/7500-3 400/3/50 EL	SH SOL AR 7P-170/1200 D	SH SOLAR 7P-170/1200 DSS	SH SOLAR 8P-180/2000 D SH SOLAR 7P-135/875 F18	SH SOLAR 7P-170/1200 E18	SH SOLAR 7P-170/1200 E36	SH SOL AR 7P-170/1200 E54	SH SOLAR 7P-170/1200 G	SH TRUCK 5M-180/970	SH TRUCK 7P-175/1260	SH AUTO 5M-100/500 DSS	SH AUTO 5M-100/500 E	MC 2C-160/740 PE1 MC 3C 180/770 PET	MC 4C 220/770 PEXT	MC 5C 230/940 PE	MC 5C 280/1000 PE	MC 5M-195/1000 DF	MC 5M 280/1100 PE	MC 5M 280/1100 PE Cage	MC 7P-220/1120 PE PLUS	MH 7P-220/1120 PE	MH 7P-220/1300 DE	Item no.
																•																						-						-				1011
	. <b></b> .	• • •		•••	• • •		٠.	. <b>.</b> .	• •	• • •			• • •		٠.			• •		٠.					٠	• •	• • •	٠.		• •	• • •		٠.	•••		· · •			•		٠.	. <b>.</b> .	• •	• • •		• •		•••••
												0																				<u>.</u>					(	o .										10111
													0																									0										1011
																																·····•																
																																						-										1011
																																<u>-</u>																1011
	<u>.</u>																															·····•						<u>.</u>			<u>.</u>							
	0 0	0 (	0 0	0	0	0	0 0	0	0	0	0	0 0	0	0	0			0	0	0 0	o c												0	0	0										c	0	0	
											······•																					·····•																
				0	0						·····•																									-		-										(
	0 0	0 0	0 0	0	0	0	0.0	0 0	0	0	0 1	0	0	0	0			0				0	0	0	0.0	0	0	0	c	0	0	0 0	0	0	0						(	0 0	0	0	0 0	0	0	280
0000	000	0 (	0 0	0	0	0	0 0	0 0	0	0	0 1	0 0	0	0	0	0 0	0	0	0	0 (	0 0						0	0 0	0 0	0	0	0 (	0	0	0			0 0	0	0	0 (	0 0	0	0	0 0	0	0	1
											·····•																					·····•																
0000	0											o	0																					0	0			-										5
	0 0	0 0	0 0	0	0						<b>.</b>	0	0	0	0 (	0 0	0	0	0	0 0	o c	 )										· · · · · · • · · ·		0	0													
	• • • • •	•••	• • •	••	• • •			•	••	• • •	•••		•••	• • •	••		•	••	• • •	•	• • •	••	• • •		•••	• •		•	•••	•	• • •	• • •	••	•••			1	•	• • •	• • •	•	• • •	•	• • •	• • •	••	• • •	10280
											<b>.</b>							<b>.</b>														<u>.</u>						····-										10200
																																<u>.</u>	-															10280
											<b>.</b>					••••																• · · · · • · ·																
																																<u>-</u>																10280
												.   .																																				•••••
0000	0 0 0	0 0	0 0	0	0	0	0 0		0	0	0	0 0	0	0	0	0 0	0	0	0	0 0	0 0	0	0	0	0 0	0	0	0 0	0 0	0	0	0 0	0	0	0			0 0	0	0	0 0	0 0	0	0	0 0	0	0	110
																			-																													
														0	0 (	0 0	0	0	0	0 0	o c	)					0	0 0	o c	0	0	0 0	0															460
																			0	0 0	o c	)							c	0	0	0 0	0															460
															-															-																•••••	-	

Standard accessories
 Supplementary accessories
 Supplementary and mountable accessories

Filter Pressure Washer	MC 2G-120/520 T MC 2G-120/520 XT MC 2G-140/610 XT MC 2G-150/650	MC 2C-150/650 XT MC 3C-150/660 MC 3C-150/660 XT MC 3C-160/770	MC 3C-170/820 MC 3C-170/820	MC 5M-180/840 MC 5M-180/840 XT	MC 5M-200/1000 MC 5M-200/1000 XT	MC 5M-200/1050 MC 5M-200/1050 FA	MC 5M-200/1050 XT	MC 5M-220/1130 FA	MC 4M-160/620 MC 4M-140/620 MC 4M-160/620	MC 4M-160/620 XT	MC 4M-180/740 XT	MC 6P-170/1600 FA MC 6P-170/1600 FAXT	MC 6P-180/1300 FA MC 6P-180/1300 FAXT	MC 6P-200/1100 FAXT	MC 6P-250/1100 FA MC 6P-250/1100 FAXT	MC 7P-195/1280 FA	MC 7P-195/1280 FBFA	MC 7P-195/1280 FFA	MC 8P-160/2500 ST	MC 8P-180/2100 MH 3C-145/600 PA	MH 3C-145/600 PAX	MH 3C-180/780 PA	MH 3C-180/780 PAX MH 3M-140/580 PA	MH 3M-140/580 PAX 230/1/50 EU	MH 3M-160/770 PA	MH 4M-130/720 FA
FILTER CARTRIDGE INCL. HOLDER				<u> </u>																0	) 0	0 (	<b>D</b>			
FILTER CPL. MH 5000MM2 50µ ACCESSORY																				0	) 0	0 (	0 0	0	0 (	•
FILTER FOR WATER BREAK TANK ACCESSORY																				0	0 0	0 1	0 0		0 (	) 0
SAND FILTER SOMICRON UNIVERSAL	0000	0000	000	000	0 0	0 0	00	000	000	0 0	000	0 0	0 0	0 (	0 0	0 (	0 0	0 0		0 0	0	0	о с		0 (	٥ ٥
SAND FILTER ATTACHMENT ACCESSORY																				G	0 0	0 (	0			0
					-																					
SANDFILTER FOR WBT KIT				0 0	0 0	0 0	00	000				0 0	0 0	0 (		0 (	0									
ANDFILTER RACKED KIT P5 PA/FA P6-P7FA				0 0	0 0	0 0	00	0 0	D .			0 0	0 0	0 (	0 0	0 (	0 0	0					_		<u>-</u> -	
SUCTION FILTER 3 M HOSE		000	000	000	0 0	0 0	00	0 0	000	0 0	000	0 0	0 0	0 (	0 0	0 (	0 0	0								
SUCTION FILTER WITH FOOTVALVE	0000	0000	000	000	0 0	0 0	00	000	000	0 0	000	0 0	0 0	0 1	0 0	0 (	0 0	0		0	) O	0 (	0 0	0	0 (	>
WATER BRAKE TANK KIT				0 0	0 0	0 0	000	000	) )			0 0	0 0	0 (	0 0	0 (	0 0	0								
WATER FILTER 50uM 3/4INCH PN12 PA	0000	0000	000	000																o	0 0	0 1	о с		0 (	)
WATER FILTER COMPLETE	0000	0 0 0 0				0 0			200				0 0				2.0			0						
Brush Washing BRUSH INSERT	0000	0000	000	000	0 0	0 0	00	0 0	000	0 0	000	0 0	0 0	0 (	0 0	0 (	0 0	0 (	0	0 0	) 0	0 (	0 0	0	0 (	) C
SELF-SERVICE BRUSH AUTO																			-							
WASH BRUSH - ERGO - UNIVERSAL LANCE	0000	0000	000	000	0 0	0 0	00	000	000	0 0	000	0 0	0 0	0 (	0 0	0 (	0 0	0 (	0 0	0 0	0 0	0	о с	0	0 (	) c
WASH BRUSH L1550 MM	0000				-																		0.0			
WASH DROJE LIGOU WIW				, 0 0																						, .
WASH BRUSH L2350 MM	0000	0000	000	00	0 0	0 0	00	0 0	000	0 0	000	0 0	0 0	0	0 0	0 (	0 0	0 0	0	0 0	, 0	0 (	0 0	0	0 0	) C
Brush Rotary			••••		•••		• • •	•••		• • • •	•••	• • • •	• • • •		• • •	•••	• • • •		•••		•••			• • •		

MH 4M-200/960 FA MH 4M-210/1000 PAX MH 4M-210/1000 PAX MH 4M-220/1000 FAX MH 4M-220/1000 FAX MH 5M-200/960 FAX MH 5M-200/960 FAX MH 5M-200/960 FAX MH 5M-200/960 FAX MH 5M-210/1100 PAX MH 5M-210/1100 PAX MH 5M-210/1100 PAX MH 5M-210/1100 FAX MH 5M-210/1100 FAX MH 5M-210/1100 FAX MH 5M-115/1250 FA MH 6P-200/1300 FA MH 6P-200/1300 FA MH 8P-180/1260 FAX MH 7P-180/1260 FAX C UNO 4M-160/720 PS SC UNO 4M-160/720 PS SC UNO 5M-200/1900	SC UNO 7P-1807/200 SC UNO 7P-1807/200 SC DUO 6P-160/5000 SC DUO 6P-160/5000 SC DUO 6P-200/3800 SC DUO 7P-1807/200 SC DUO 7P-1807/200 SC DUO 7P-1807/200 SC DELTA 6P-160/9000-6 EU SC DELTA 6P-160/9000-6 EU SC DELTA 6P-160/9000-6 EU SC DELTA 6P-160/9000-6 EU SC DELTA 8P-100/1900-6 EU SC DELTA 8P-100/1900-6 EU SC DELTA 8P-100/1900-6 EU SC DELTA 8P-100/1900-6 EU SC DELTA 8P-100/1900 DE SC DELTA 8P-100/1900 DE SC DELTA 8P-100/1900 DE SC DELTA 8P-1707/100 DE SC DELTA 8P-1707/100 ES SC SC DELTA 8P-1707/100 ES SC S	MA 22/6/07/40 FET MA 25 (180/770 FET MA 25 (180/770 FET MA 57 230/340 FET MA 57 230/340 PET MA 57 230/340 PET MA 58/149/1400 PEXT MA 58/149/1400 PEXT MA 58/149/140 PET MA 58/149/140 PET MA 78/220/1120 PE PLUS MH 78/220/1120 PE MH 78/220/1300 DE MH 78/220/1300 DE
		31001012
• • • • • • • • • • • • • • • • • • • •		107144272
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		106403194
000000000000000000000000000000000000000	000000000000000000000	0 0 0 0 0 0 0 0 0 0 0 0 1604461
0 0 0 0 0		106403181
00000	> 0	106403165
		106403142
		0 0 0 0 0 0 0 0 0 0 0 0 61256
		0 0 0 0 0 0 0 0 0 0 0 6400000
		106403144
0 0		0 0 0 0 0 0 0 0 0 301000173
0000	0	107145802
000000000000000000000000000000000000000	00000 000000000	0 0 0 0 0 0 0 0 0 0 0 0 0 0 10356
	••	106402241
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	00000 0000000000	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 14202
000000000000000000000000000000000000000	000000000000000000000000000000000000000	0 0 0 0 0 0 0 0 0 0 0 0 6400088
000000000000000000000000000000000000000		0 0 0 0 0 0 0 0 0 0 0 0 0 6400087
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0000000000000000	0 0 0 0 0 0 0 0 0 0 0 6401431

Standard accessories
 Supplementary accessories
 Supplementary and mountable accessories

	Brush Rotary	MC 2C-120/520 T MC 2C-120/520 NT MC 2C-140/610 NT MC 2C-150/650 MC 2C-150/660 NT MC 3C-150/660 NT MC 3C-150/660 NT MC 3C-150/660 NT MC 3C-150/660 NT MC 3C-170/820 MC 3C-170/820 MC 3C-170/820 NT MC 5M-180/840 NT MC 5M-180/840 NT	MC 5M-200/100 XT MC 5M-200/100 D MC 5M-200/100 D MC 5M-200/100 D MC 5M-200/130 MC 5M-200/130 T MC 5M-200/130 T MC 4M-140/620	MC 4M+160/620 MC 4M+160/620 MC 4M+160/740 MC 4M+180/740 MC 4M+180/740 MC 6P+190/7400 FA MC 6P+190/1300 FA MC 6P+190/1300 FA MC 6P+180/1300 FA MC 6P+280/1100 FAXT MC 6P+280/1100 FAXT MC 6P+280/1100 FAXT MC 7P+195/1280 FA MC 7P+195/1280 FAXT MC 7P+	M. Q. R. 16,2500 ST M. Q. R. 16,2500 ST M. H. 3C. 145,600 PA M. H. 3C. 145,600 PA M. H. 3C. 1807/20 PA M. H. 3C. 1807/20 PA M. H. M. 1607/20 PA M. H. M. 1607/20 PA M. H. M. 1807/20 FA M. H. M. 1807/20 FA M. M. H. M. 1807/20 FA M. M. M. 1807/20 FA
100	NYLON. BRISTLE FOR ROTARY	00000000000000	000000000	00000000000000000	0 0
$\mathcal{L}$	ROTARY BRUSH 055 1700MM	00000	000000000	0000 000	
*	RUIAN CO I CON AND AND AND AND AND AND AND AND AND AN			0000	
1	ROTARY BRUSH 055 L800 MM	00000000000	000000000	0000	
	ROTARY BRUSH 065 L1700 MM			00 0000	
	Surface Cleaning Rotary HYDROSCRUB P300 P+H	0000000000000	00 0	0 0 0 0	00000000000
7	HYDROSCRUB P400 W/O NOZZLES	0000000000000	00000000	0000 00000000	0000000000
	HYDROSCRUB P500M Ø500 W/WHEELS W/O NOZZL	0	0000000	000000000	0 0 0 0
P	HYDROSCRUB S500 Ø500 W/O NOZZLES			00000000000	<b>)</b> 0
•	Injector and Foam Sprayer  1L BOTTLE W/O CAP	0000	0	0 0 0 0	0000
	02 INJECTOR COMPLETE	000000000	0	0 0 0 0	00000000000
5	03 INJECTOR COMPLETE	0000000	000000000	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	00000000000
	BOTTLE FOR FOAM SPRAYER 2 L	0	0000000	000000	0000000000
	Kanne 2,5 liter uten lokk	0000000000000	00000000	00000000000000	00000000000
1					
B	DETERGENT TANK W. SEALING CAP - 2.5 LTR.	000000000000000000000000000000000000000	000000000	• • • • • • • • • • • • • • • • • • • •	00000000000
1	DETERGENT TANK W. SEALING CAP - 2.5 LTR.  EXTENSION HOSE 30 CM WITH ERGO COUPLINGS	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		0000000000000000	000000000000000000000000000000000000000
		0 0			
	EXTENSION HOSE 30 CM WITH ERGO COUPLINGS	0 0	0 0 0	0000000000	0000000000

MH 4M-200/960 FA	MH 4M-200/960 FAX	IM-210/1000 PAX	MH 4M-220/1000 FA	MH 4M-220/1000 FAX	MH 5M-200/960 FA MH 5M-200/960 FAX	MH 5M-210/1100 FA	MH 5M-210/1100 FAX	MH 5M-210/1100 PAX	MH 5M 180/800 PA	MH 5M 180/800 PA	MH 6P-175/1250 FA	MH 6P-175/1250 FAX	5P-200/1300 FA	MH 6P-200/1300 FAX	MH 7P-180/1260 FA	MH 7P-180/1260 FAX	MH 8P-180/2000 FA	MH 8P-180/2000 FAX	NO 4M-140/620 PS	SC UNO 4M-160/720 PS	SC UNO 5M-200/1050	SC UNO 5M-200/1050 L	SC UNO 6P-160/2500	SC UNO 6P-170/1610	SC UNO 6P-200/1900	SC UNO 7P-180/1200	SC DUO 6P-160/5000	SC DUO 6P-170/3220	SC DUO 6P-200/3800	JO 7P-180/2400	SC DELTA 6P 160/4500-3 EU	ELTA 6P 160/6000-4 EU	SC DELTA 6P 160/9000-6 EU	SC DELTA 8P 100/10000-4 400/3/50 EU	ELTA 8P 100/15000-6 400/3/50 EU	SC DELTA 8P 100/7500-3 400/3/50 EU	SH SOLAR 7P-170/1200 D	SH SOL AR 7P-170/1200 DSS	SH SOLAR 8P-180/2000 D	SH SOLAR 7P-135/875 E18	SH SOLAR 7P-170/1200 E18	SH SOLAR 7P-170/1200 E36	SH SOLAR 7P-170/1200 E54	SH SOLAR 5M-150/1020 G	SH SOLAR 7P-170/1200 G	SH TRUCK 5M-180/970	SH TRUCK 7P-175/1260	SH AUTO 5M-100/500 DSS	SH AUTO 5M-100/500 E	MC 2G-160/740 PET	3C 180/770 PET	MC 4C 220/770 PEXT	MC 5C 230/940 PE	MC 5C 280/1000 PE	MC 5C 280/1000 PEXT	MC 5M-195/1000 DE	MC 5M 280/1100 PE	MC 5M 280/1100 PF Cage	MC 7P-220/1120 PE PLUS	MH 5M-200/1000 DE	MH 7P-220/1120 PE	MH 7P-220/1300 DE			Item no.		
Σ	MH	MH	MH 2	MH.	ME M	MH	MH	MH	MH	MH	MH	MH	MH	MH	MH	MH 7	MH	MH	SC U	SC U	SC U	SC U	SC U	SC U	SC U	SC U	SC D	SC D	SCD	SC D	SCD	SC D	SC D	SCD	SCD	SCD	SHS	SHS	SHS	SH SC	SHS	SHS	SHS	SH SC	SH S(	SHTI	SHT	SHA	SHA	MC 2	MC	MC 2	W	MC	MC	MC	M	N	MC	MH	MH	MH			<u>Te</u>		
					0 0	0	0	0	0	0	0	0	0	0	0	0			0	0					-						0	0	0	0	0	0	0	0		0	0	0	0	0	0	0	0						0	0	0	0	0	C	0	0	0	0			6401	1432	!
					0 0	0	0	0	0	0									0	0	0	0																		0				0		0							0	0	0	0	0	0	0	0	0				6400	0019	)
					0 0	0	0	0	0	0								•	0	. 0	0	0						•										-		0				0		0							0	0	0	0	0	0	0	0	0				6400	0018	3
											0	0	0	0	0	0										0				0	0	0	0	0	0	0	0	0			0	0	0	0	0	0	0															0			6400	0016	;
	••			••	• • •	••	•••	· · •	•		• • •		••		•••		•••	••	0	0	•••			•••		•••	• • 	••	••	••		••	••	••		••	••		••		••	••	••	••	••	••		••	0	0	••	••		••		••	••	• •		•••	••	••	•••	10	6403	3187	7
0	0	0	0	0 (	0 0	0	0	0	0	0	0	0	0	0	0	0			0	0	0	0		0		0		•												0	0	0	0	0	0	0	0	0	0		0	0	0	0	0	0	0	0	0	0	0	. 0		10	6403	3157	7
0	0	0	0	0 (	0 0	0	0		0	0	0	0	0	0	0	0	0	0			0		0		0	0		0		0							0	0	0	0	0	0	0	0	0		0				. 0	0	0	0	0	0	0	C	0	0	0	. 0		10	6403	3159	 9
														•						• • • • • • • • • • • • • • • • • • • •		•		• · · · · ·		• · · · · ·		•				-		•						-												•				-											
									0	0	0	0	0	0	0	0	0	0				•		0		0		0		0		_					0	0	0	0	0	0	0		0		0							0	0	_	0	0		0	0			10	6403	3158	
	••	• • •	• • •	• •	• • •	••							••	•••	•	••	•	•			•		•	• •		• •		••	• •	• •	•	•	••	•	••	•	••	•	••	••	••	• •	• •	•		•	••	•	• •	•	••	• •	• •	•	•	•	•	• •	••	•	• •	•	•••		1000	0912	•••• •
																						•										-																						-		-										40.46	
																								•		•		•						•								. <u>.</u>																	0						6401	1240	
0	0	0	0	0 (	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		0	0			0	0	0	0	0	0	0			0	0	0	0	0	0	0		C	0	0	0				6401	1247	
0	0	0	0	0 (	0 0	0	0	0	0	0			•							•		•																·•···														•												10	6408	8164	ŀ
0	0	0	0	0 (	0 0	0	0	0	0	0	0	0	0	0	0	0			0	0	0	0	0	0	0	0	0	0	0	0				-			0	0	0	0	0	0	0	0	0	0	0									0			0	0	0	. 0		10	7141	1635	5
0	0	0	0	0 (	0 0	0	0	0	0	0	0	0	0	0	0	0			0		0		0	0	0	0	0	0	0	0							0		. 0		0		0	0	0	0	0			0	0	0	0	0	0	0	. 0	. c	0		0	. 0		10	6403	3162	2
0	0	0	0	0 (	0 0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0							0	0		0	0	0	0	0	0																			3(	)100°	1311	<u> </u>
0	0	0	0	0 (	0 0	0	0	0	0	0	0	0	0	0	0	0	0	0			0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		0	0	0	0	0	0	0	0					0	0	0	0	0	0	C		0	0	0			6401	1245	5
0	0	0	0	0 (	0 0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		0	0	0	0	0	0	0	0					0	0	0	0	0	0	C	0	0	0	0			6401	1242	2
0	0	0	0	0 (	0 0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	. 0	0				0	0	0	0	0	0	0					0	0	0	0	0	0	C	0	0	0	. 0			6401	1243	3
					-																																	-						-																							

Standard accessories
 Supplementary accessories
 Supplementary and mountable accessories

	-			
	MC 2C:120/S20 T MC 2C:120/S20 XT MC 2C:120/S20 XT MC 2C:130/S60 MC 2C:150/S60 MC 2C:150/S60 MC 3C:150/S60 MC 3C:150/S20 MC 3C:15	MC 58A-180/840 MC 58A-180/840 MC 58A-180/840 MC 58A-200/1000 MC 58A-200/1000 MC 58A-200/1000 MC 58A-200/1000 MC 58A-200/1100 MC 58A-200/1100 MC 58A-200/1100 MC 58A-200/1100 MC 58A-200/1100 MC 58A-200/1100 MC 58A-160/620 MC 48A-160/620 MC 48A-160/	MC 44A-1807/40 W C 44A-1807/40 W C 44A-1807/40 W C 6P-1707/600 F A M C 6P-1707/600 F A M C 6P-1807/300 F A M C 6P-2607/100 F A M C 6P-2607/100 F A M C 7P-1957/280 F A	MC BF-160/2500 ST MR BF-160/2500 AA MH 3C-145/600 PAA MH 3C-145/600 PAA MH 3C-140/500 PAA MH 3AF-140/500 PAA MH 3M-140/500 PAA MH 3M-160/770 PAA MH 3M-160/770 PAA MH 4M-150/770 PAA
Injector and Foam Sprayer FOAM INJECTOR STANDARD	(	00000000	0000000000	0000000
FOAM INJECTOR STANDARD P8			00000	0 0
FOAM LANCE COMPLETE L600 MM	000000000	000000000000000	0000000000000	00000000
FOAM LANCE COMPLETE L1200 MM	0000000000	00000000000000	000000000000	00000000
HOLDER F. FOAM GUN		0 • • •		
NILFISK FOAMSPRAYER VARIO 1 LTR 037	00000	0 0 0		
NILFISK FOAMSPRAYER VARIO 1 LTR 055	000	C	o o	00000000
NILFISK FOAMSPRAYER VARIO HF 0950		0000000	00000000	
Liquid Sprayer 8P PRESPRAY UNIT	00000	000000000	000000000000	00 0000
LIQUID SPRAYER 5S	0000000000	00000000000000	00000000000000	00000
LIQUID SPRAYER 10SP	00000	00000000000000		00000
LIQUID SPRAYER 20S	0000000000	000000000000000	0000000000000	00 0000
VSP 101	0000			
Drain and Pipe Cleaning HP Hose DN10 20000 AGR-Drain cleaner 05	0 0 0 0	000000000	0 0	00000000
HP Hose DN10 20000 AGR-Drain cleaner 06			0 0000	
DRAIN NOZZLE 05 3/8	000	0000000	0 0	
			0 0000	
DRAIN NOZZLE 06. 3/8		0 0 0		


MH 4M-200960 FAX MH 4M-200960 FAX MH 4M-200960 FAX MH 4M-220000 FAX MH 5M-22001000 FAX MH 5M-200960 FAX MH 5M-20010100 FAX MH 5M-21001100 FAX	MH 5M 180/800 PA MH 6P-175/1250 FA MH 6P-200/1300 FA MH 6P-200/1300 FA MH 7P-180/1250 FA MH 7P-180/1250 FA MH 7P-180/1250 FA MH 8P-180/100 FA MH 8P-180/100 FA	SC UNO 4M-140/620 PS SC UNO 4M-140/620 PS SC UNO 4M-160/720 PS SC UNO 5M-200/150 SC UNO 6P-160/250 SC UNO 6P-160/250	SC UNO 97-200/1900 SC UNO 79-1807/200 SC DUO 67-1607/2200 SC DUO 67-1607/2200 SC DUO 67-207/3200 SC DELTA 67-1607/3200 SC DELTA 67-1607/300-3-EU SC DELTA 67-1607/300-6-EU SC DELTA 67-1607/300-EU	SH SOLAR 7P-170/1200 D SH SOLAR 7P-170/1200 DS SH SOLAR 8P-180/1200 D SH SOLAR 7P-170/1200 E18 SH SOLAR 7P-170/1200 E18 SH SOLAR 7P-170/1200 E18 SH SOLAR 7P-170/1200 E54 SH SOLAR 7P-170/1200 E44 SH SOLAR 7P-170/1200 G SH TRUCK 5M-180/370 SH TRUCK 7P-175/1260 SH AUTO SM-100/500 DSS SH AUTO SM-100/500 DSS	MC 3C 180/770 PET MC 4C 220770 PEXT MC 5C 230/340 PE MC 5C 280/1000 PEXT MC 5C 280/1000 PEXT MC 5M. 280/1100 PE MC MM 7P-220/1130 PE MH 7P-220/1300 DE MH 7P-220/1300 DE
0000000000	00000000	00000	000000000000	000000000	0 0 0 0 0 0 0 0 0 0 0 6401244
	0 0				106402248
> 0 0 0 0 0 0 0 0 0	00000000	0000000	00000000000	0000000000000	0 0 0 0 0 0 0 0 0 0 0 0 6404368
> 0 0 0 0 0 0 0 0 0 0	00000000	0000000	00000000000	000000000000	0 0 0 0 0 0 0 0 0 0 0 0 6404369
					107142504
					106408234
0000					106408235
0000000000	000000				106408236
0000					O O O 25598
000000000					0 0 0 7110005
000000000					0 0 0 7110010
					0 0 0 7110020
					80853
0000		0 0		0 00	0 0 0 0 6401266
	00000	0 0	0	0 0 0 0 0 0 0 0 0	O O O 6401268
		0000		0	0 0 0 0 2800084
	00000	00	0	00 000000	0 0 0 2800894
0000000000	000000	0000	0	00000	o 301002490

<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

			Ш	ПП	
	MC 2C120/220 T MC 2C120/220 XT MC 2C140/610 XT MC 2C150/660 MC 2C150/660 MC 3C150/660 MC 3C150/6	M. 26-17/08/20 M. M. 26-17/08/20 M. M. 26-17/08/20 M. M. 56-18/08/40 M. SM-180/84d M. M. SM-200/1000 M. SM-200/1000 M. SM-200/100 SF A. M. SM-200/105 F A. M. SM-200/105 F A. M. SM-200/130 F A. M. SM-200/	MC 4M-160/620 MC 4M-160/620 MC 4M-180/740 MC 4M-180/740 MC 6P-170/1600 FA MC 6P-170/1600 FAX MC 6P-180/1300 FAX MC 6P-180/1300 FAX MC 6P-200/1100 FAXT	MC RP-250/1100 FA MC RP-250/1100 FAXT MC PP-195/1280 FAX MC PP-195/1280 FBFA MC PP-195/1280 FBFA MC RP-160/12500	MC 8P-160/2500 ST MC 8P-160/2500 ST MH 3C-145/600 PAX MH 3C-145/600 PAX MH 3C-145/600 PAX MH 3C-145/600 PAX MH 3M-140/580 PA MH 3M-160/770 PAX MH 3M-160/770 PAX MH 3M-160/770 PAX
Drain and Pipe Cleaning PIPE CLEANING HOSE 4X20M	00000000	0000000000000	0000 0	00000	00000000
PIPE CLEANING HOSE 4X30M	00000 00	000000000000	0000	00000	00000000
PIPE CLEANING HOSEØ4MMX1		0	0000		
PIPE CLEANING NOZZLE 1/8INC IG DN4	00000 00	000000000000	0000		00000000
PIPE CLEANING NOZZLE SET 10M	00000000	000000000000	0000		
PIPE CLEANING NOZZLE SET 20M	00000000	000000000000	0000		
PIPE CLEANING ROTATY NOZZLE 1/8INC IG DN	00000	000000000000	0 0 0 0		00000000
Abrasive Blasting ARMEX-POWDER	0000	00000000000000	000000000	00000	
BORONCARBIDE FLAT NOZZLE VSB				0000	
LANCE SOFTBLASTING W. NOZZLE 05		0000000		0 0	
LANCE WITH RUBBER FLAT NOZZLE 05	0 (	00000000		0 0	
ANCE WITH RUBBER FLAT NOZZLE 06			00000	00000	
NOZZLE FOR WSB - FLAT RUBBER 10 PC.	0 0 0	0000		0000	
SAND PLUGER AND HOSE VSB	0 0	0000000000	000	00000	
SIMPLE SAND BLASTING UNIT COMPLETE VSB	00000000	0 0	0000		00000000
SAND SUPER BLAST 25KG	0000	0000000000000	00000000	00000	
External Control Unit LOW PUMP OIL SAFETY FUNCTION FOR POS. 5		000000000			
REMOTE CONTROL 2X DETERGENT ACCESSORY					

MH 4M-200960 FAX MH 4M-200966 FAX MH 4M-200966 FAX MH 4M-2207000 FAX MH 5M-2207000 FAX MH 5M-200960 FAX MH 5M-200960 FAX MH 5M-200960 FAX MH 5M-200960 FAX MH 5M-200100 FAX	MH 5 M-21 OF 10 OF AX MH 5 M-80 OF DA MH 5 M-80 OF DA MH 6P-175 M-25 OF AX MH 6P-175 M-25 OF AX MH 7P-180 M-30 OF A	SC UNO 4M-140/520 PS SC UNO 4M-140/520 PS SC UNO 4M-140/520 PS SC UNO 5M-200/150 SC UNO 5M-200/150 SC UNO 6P-160/2500 SC UNO 6P-100/520 SC UNO 6P-200/1900 SC UNO 6P-200/1900 SC UNO 6P-200/1900 SC UNO 6P-200/1900 SC UNO 6P-200/3220 SC DUO 6P-160/5000 SC DUO 7P-180/2200 SC DUO 7P-180/2200 SC DUO 7P-180/2200 SC DUI 7A PF 160/4500-3 EU SC DELTA 6P 160/95000-6 EU SC DELTA 6P 160/95000-6 EU SC DELTA 8P 100/10000-4 400/3/50 EU	SC DELTA 8P 100/1500 6-6 400/3/50 EU SH 50 DETA 8P 100/7500 3-400/3/50 EU SH 50 LAR 7P-170/1200 D SH 50 LAR 7P-170/1200 D SH 50 LAR 7P-170/1200 E18 SH 50 LAR 7P-170/1200 E36 SH 50 LAR 7P-170/1200 G SH 78 LOLA 7P-170/1200 G	MC 2C-160/740 PET MC 4C-200/740 PET MC 4C-200/770 PET MC 5C-230/940 PE MC 5C-230/940 PE MC 5C-230/940 PE MC 5C-230/100 PEXT MC 5M-280/100 PEXT MC 5M-280/100 PEXT MC 5M-280/100 PE MC 5M-280/100 PE MC 5M-280/100 PE MC 7P-20/120 PE MH 5M-200/100 DE MH 7P-220/130 DE	Item no.
0000000	00000000	0 0 0 0	000000	0 0	301002491
0000	0 0	0000	000	0	301002492
		0000			46920
0000	00000	0000	0000000	0 000	46921
					106403072
					106403073
0000000	00000000	0 0 0 0	000000	0 0000	46918
	0 0	00000000000000	0 0 0 0 0	0000000000000	5218617
0000	000	0 0 0 0 0 0 0 0 0 0	0000000		6400379
		000000	0 0	00000000000	6401233
		0 0 0		0 000	6401364
	00000	0 0 0000	000000000	0 0 0	6401365
0000	00000000	0000000000	00 0000000	0000000000000	6402317
	0000000	00000000000000	00000000000	0000000000000	6400375
0000		0		0000000	301112493
	00000	00000000000000	0000000000		8379
					106403166
00000000	0 0000000				106403196
					-

<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

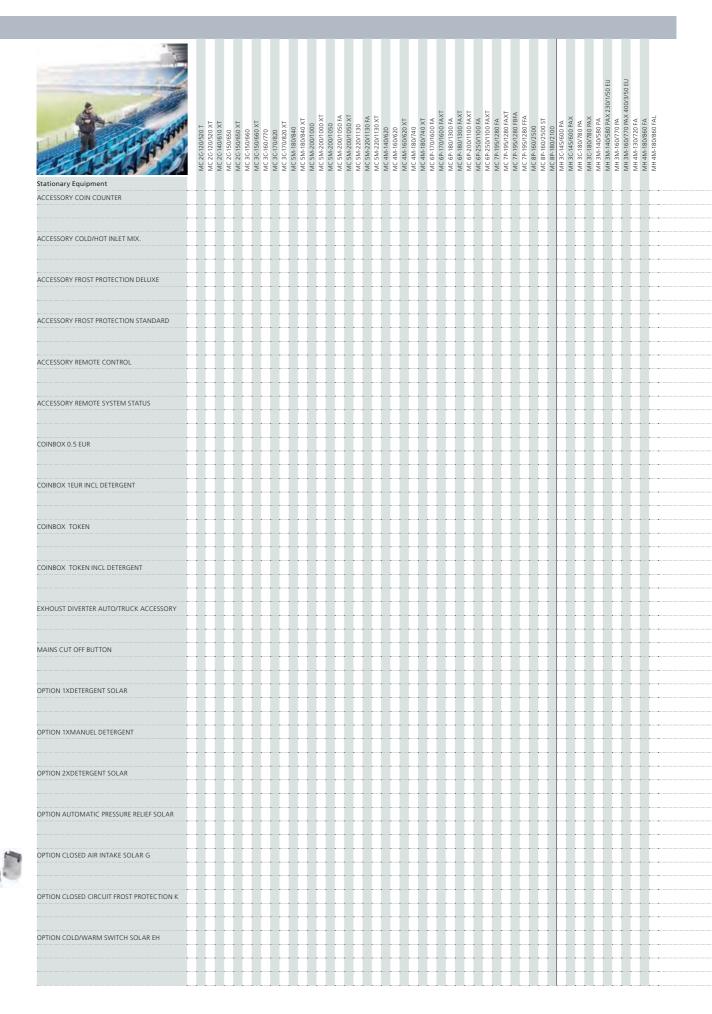



	r			ı		ı		ı		ı										ļ		ŀ		ı					ı													ı					ı				ı	ı			
× 41 000000 444 1144	MH 4M-210/1000 PAX	MH 4M-220/1000 FA	MH 4M-220/1000 FAX	MH 5M-200/960 FA	MH 5M-210/390 FAX	MH 5M-210/1100 FAX	MH 5M-210/1100 PAX	MH 5M 180/800 PA	MH 5M 180/800 PA	MH 6P-175/1250 FA	MH 6P-175/1250 FAX	MH 6P-200/1300 FA	MH 6P-200/1300 FAX	MH 7P-180/1260 FA	MH 7P-180/1260 FAX	MH 8P-180/2000 FA	SC UNO 4M-140/620 PS	SC UNO 4M-160/720 PS	SC UNO 5M-200/1050	SC UNO 5M-200/1050 L	SC UNO 6P-160/2500	SC UNO 8F-170/1810	SC UNO 7P-180/1200	SC DUO 6P-160/5000	SC DUO 6P-170/3220	SC DUO 6P-200/3800	SC DUO 7P-180/2400	SC DELTA 6P 160/4500-3 EU SC DELTA 6P 160/6000-4 EU	SC DELTA 6P 160/9000-6 EU	SC DELTA 8P 100/10000-4 400/3/50 EU	SC DELTA 8P 100/15000-6 400/3/50 EU	SC DELTA 8P 100/7500-3 400/3/50 EU	SH SOLAR 7P-170/1200 D SH SOLAR 7P-170/1200 DSS	SH SOLAR 8P-180/2000 D	SH SOLAR 7P-135/875 E18	SH SOLAR 7P-170/1200 E18	SH SOLAR 7P-170/1200 E36 SH SOLAR 7P-170/1200 F54	SH SOLAR 5M-150/1020 G	SH SOLAR 7P-170/1200 G	SH TRUCK 5M-180/970	SH TRUCK 7P-175/1260 SH AIITO 5M-100/500 DSS	SH AUTO 5M-100/500 E	MC 2C-160/740 PET	MC 3C 180/770 PET	MC 4C 220/770 PEXT	MC 5C 280/1000 PE	MC 5C 280/1000 PEXT	MC 5M-195/1000 DE	MC 5M 280/1100 PE	MC 5M 280/1100 PE Cage	MC 7P-220/1120 PE PLUS	MH 5M-200/1000 DE	MH 7P-220/1120 PE MH 7P-220/1300 DE	Item no.	
		_					_																																		c	0												10737	09
																												o c	0	0	0	0				<u>-</u>																		 10737	11
																																	0 0	0	0	0 (	0 0	0	0															 10737	0'
																																	0 0	0	0	0 (	0 0	0	0															 10737	0
																												o c	0	0	0	0																						 10737	′1
•																												o c	0	0	0	0																						 10737	11
																					·····•										-		0 0	0	0	0 (	0 0	0	0															 5-	
• • • • • • • • • • • • • • • • • • • •																																	0 0	0	0	0 (	0 0	0 0	0															 5	14
• • • • • • • • • • • • • • • • • • • •							_																	-									0 0	0	0	0 (	0 0	0	0						-									 5-	.4
																													-				0 0	0	0	0 (	0 0	0	0						-									5-	.4
																					····•																			0 (	0							-						 10731	8
																																	0 0	0	0	0 (	0 0		0															 2	29
																					·····•												0 0	0	0	0 (	0 0	0 0	0															 10737	70
																														-			0 0	0					0															 10734	
				-																										-			0 0	0	0	0 0	0 0	0	0						_									 10737	70
																														-							0 0								-					_				 10737	0'
																																	0 0		-			0										-						10737	
											-																																					-							
											-																			-										0								-						10737	
				_																															0	0 (	0 0								_									10737	09

<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

stationary Equipment OPTION LOW WATER SEC		TOCOMETOC	MC 2C-120/520 XT	MC 2C-140/610 XT MC 2C-150/650	MC 2G-150/650 XT	MC 3C-150/880	MC 3C-160/770	MC 3C-170/820 MC 3C-170/820 XT	MC 5M-180/840	MC 5M-180/840 XT	MC 5M-200/1000	MC 5M-200/1000 XI MC 5M-200/1050	MC 5M-200/1050 FA	MC 5M-200/1050 XT	MC 5M-220/1130 MC 5M-220/1130 FA	MC 5M-220/1130 XT	MC 4M-140/620 MC 4M-160/620	MC 4M-160/620 XT	MC 4M-180/740 MC 4M-180/740 XT	MC 6P-170/1600 FA	MC 6P-170/1600 FAXT	MC 6P-180/1300 FAXT	MC 6P-200/1100 FAXT	MC 6P-250/1100 FA	MC 7P-195/1280 FA	MC 7P-195/1280 FAXT	MC 7P-195/1280 FBFA	MC 8P-160/2500	MC 8P-160/2500 MC 8P-160/2500 ST	MC 8P-180/2100	MH 3C-145/600 PA	MH 3C-145/600 PAX	MH 3C-180/780 PA	MH 3M-140/580 PA	MH 3M-140/580 PAX 230/1/50 EU	MH 3M-160/770 PA	MH 3M-160/770 PAX 400/3/50 EU MH 4M-130/720 EA	MH 4M-180/860 FA
DPTION MULTI MACHIN	E CONNEC. BOX SC	DLAR																																				
DPTION NO SCALE																																						
DPTION NO-SCALE SOLA	AR			-															_															_				
DPTION REMOTE CONTR	OL 4 BUTTONS			_				_											_															_				
DPTION REMOTE CONTR	OL 5 BUTTONS																																					
DPTION STAINLESS STEE	L PARTS SOLAR D/E	EH																																		·····•		
DPTION WATER INLET SE	:CURITY															·····•																				·····•		
DPTION WATER SOFTEN	ER UNIT																	-																		······•		
REMOTE CONTROL BOX	ES 2 BUTTONS															·····•																						
REMOTE CONTROL BOX	ES 3 BUTTONS			-												·····•																				·····•		
TOKENS Ø22.0X2.3 SET-	50	-														·····•																				·····•		
Option ACC. COIN BOX ON/OFF	+ DETERGENT A, B				• • • •	• • • •	•••	• • •	•••	• • •	• •	• • •	• • •	•••	• • • •		•••	• • •	•••	•••		• • • •		• • •	•••	• • •						•		•••	• • •	• • •	• • •	••
ACCESS. WATER BREAK	TANK 40 L/MIN DU	JO 7P																																		·····•		
ACCESSORY 2 X HP DETI	ERGENT							-								·····•			-																	·····•	-	
ACCESSORY JUNCTIONB	OX REMOTE/SLAVE	E																																				
ACCESSORY LOW WATER	R SECURITY																		_																			
ACCESSORY PRESSURE R	RELIEF	_																																				

<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

																																								١																						
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	MH 4M-200/950 FA MH 4M-200/960 FA	MH 4M-210/1000 PAX	MH 4M-220/1000 FA	MH 4M-220/1000 FAX	MH 5M-200/960 FA	MH 5M-200/960 FAX	MH 5M-210/1100 FA	MH 5M-210/1100 FAX	MH 5M-210/1100 PAX	MH 5M 180/800 PA	MH 5M 180/800 PA	MH 69-175/175/1750 FA	MH 69-175/1250 GAY	MH 6F-17371230 FAX	MH 6P-200/1300 FAX	MH 7P-180/1260 FA	MH 7P-180/1260 FAX	MH 8P-180/2000 FA	MH 8P-180/2000 FAX	SC UNO 4M-140/620 PS	SC UNO 4M-160/720 PS	SC UNO 5M-200/1050	SC UNO 6P-160/2500	SC UNO 6P-170/1610	SC UNO 6P-200/1900	SC UNO 7P-180/1200	SC DUO 6P-160/5000	SC DUO 6P-170/3220	SC DUO 6P-200/3800	SC DUO 7P-180/2400	SC DELTA 6P 160/4500-3 EU	SC DELTA 6P 160/6000-4 EU SC DELTA 6P 160/8000-6 EU	SC DELTA SP 100/3003-0 LD	SC DELTA 8P 100/10000-4 400/3/50 EU	SC DELTA 8P 100/7500-3 400/3/50 EU	SH SOLAR 7P-170/1200 D	SH SOL AR 7P-170/1200 DSS	SH SOLAR 8P-180/2000 D	SH SOL AR 7P-135/875 E18	SH SOLAR 7P-170/1200 E18	SH SOLAR 7P-170/1200 E36	SH SOLAR 7P-1 70/1200 E54	SH SOLAR 7P-170/1200 G	SH TRUCK 5M-180/970	SH TRUCK 7P-175/1260	SH AUTO 5M-100/500 DSS	MAC 2C 160/240 BET	MC 3C 180/770 PET	MC 4C 220/770 PEXT	MC 5C 230/940 PE	MC 5C 280/1000 PE	MC 5C 280/1000 PEXT	MC 5M-195/1000 DE	MC 5M 280/1100 PE	MC 5M 280/1100 PE Cage	MC 7P-220/1120 PE PLUS	MH 5M-200/1000 DE	MH 7P-220/1120 PE	MH 7P-220/1300 DE		Item no.	
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0																				·····•																0	0	0					0																	1	10734	090
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0																																				0	0	0	0	0 0	<b>)</b>	0 0	0																		10737	096
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0										•										·····•																		·····•		·····•				0	0																10737	097
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0																	-				-																																									
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0																				·····•																0		0	0	0.0	<b>.</b>	0.0	0								•					<u>.</u>					10737	095
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0																	-			·····•																0	0	0	0	0 0	o (	0 0	0																		10734	1091
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0										•							- <b>-</b>			·····•		····•														0	0	0	0	0 (	<b>)</b>	0 0	0									•									10734	1091
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0																	-				-									-						0	0	0	0	0 (	<b>o</b> (	0										-									10737	096
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1073409  0 0 0 0 0 0 0 0 0 0 0 0 0 1073409  0 0 0 0 0 0 0 0 0 0 1073710  0 0 0 0 0 0 0 0 0 1073710																	-			·····•	-															0	0	0	0	0 0	<b>.</b> .	0 0	0			-															10734	1091
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1073409  0 0 0 0 0 0 0 0 0 0 0 0 0 1073409  0 0 0 0 0 0 0 0 0 0 1073710  0 0 0 0 0 0 0 0 0 1073710										•										·····•																		<u>.</u>								0 (					•					·····•					10727	7007
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0										•										·····•																																				·····•					10737	
																				·····•																0	0	0	0	0 0	o c	0 0	0																		10734	1091
										•																										0	0	0	0	0 (	o (	0 0	0								•	• • • • • • • • • • • • • • • • • • • •									10734	1091
										•										·····•																		<u>.</u>	0	0 0	<b>)</b>	0 0	0								•					<u>.</u>					1	225
	• • •		••	• • •			•			• •		•		•••		•	••	• • •		•••	•	• • •		••	• • •	• • •	• • •	• • •	••	•	••		•			•	• • •		•	••	•	• • •	••	• •	• • •				•	• •	• • •	• •	• • •	••	•	••	•	• •	•••		• • • •	• • • •
																				·····•							0	0	0	0								·····•													•										10737	7102
										•										·····•										0																						• · · · · ·									10737	102
0 0 0 0 0 0 0 0 0 0 0 1073710.										•										·····•		0	0	0	0	0												<u>.</u>				····•																			10737	102
			-																	······•							0	0	0	0																															10737	7101
0 0 0 0 0 0 0 0 0 0 0 0 0 0 10737103										•												0	0	0	0		0		0	0								<u>.</u>													••••••					<b>.</b>					10737	102
0 0 0 0 0 0 0 0 0 0 0 0 1073710.		-															-																																													
										•												0	0	0	0	0	0	0	0	0								<u>.</u>																							10737	102

<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

1	ALTO STONE-EX 10 L					
	ALTO RIMTOP 10 L	0000000000		0000	000	000000
	ALTO ALLOSIL 25 L  ALTO PHOSPHATE 25 L	00000		0 0 0 0 0		000000
	ALTO ACTIVE WAX 25 L					000000
-	Detergent ALTO ACTIVE WAX 10 L	0000000000		0000	000	000000
	ACCESSORY REMOTE INTERFACE KIT  WHEEL KIT NEP 5-54PE 7-61PE SMALL FRAME					
	ACCESSORY WATER INLET SECURITY  Accessory Kit					
	ACCESSORY WATER BREAK TANK 40 L/MIN					
	ACCESSORY STORAGE KIT					
	Option  ACCESSORY REMOTE CONTROL 6 FUNCTIONS	MC 26-120/520 T MC 26-120/520 T MC 26-130/650 M MC 26-150/650 M MC 36-150/660 M MC 36-	MC SM-2007000 MC SM-2007000 MC SM-2007000 MC SM-2007000 MC SM-2007000 MC SM-2007000 MC SM-2007130 MC SM-2207130 MC SM-2207130 MC SM-2207130 MC SM-2007130 FA	MC 44+140'6'D MC 44H-160'6'D MC 44H-180'740 MC 44H-180'740 MC 44H-180'740 MC 46H-180'740 MC 6F-170'16'0 FAXT MC 6F-120'10'0 FAXT MC 6F-200'11'0 FA	MC 7P-195/1280 FAXI MC 7P-195/1280 FBX MC 8P-160/2500 MC 8P-160/2500 T MC 8P-160/2500 T MC 8P-160/200 FAX MM 3C-145/600 PAX MM 3C-145/600 PAX MM 3C-145/600 PAX	MH 3C1807780 PAX MH MH-140780 PAX MH MH-140780 PAX MH MH-140770 PAX 40073/50 EU MH 4MH-160770 PAX 40073/50 EU MH 4MH-180780 FA MH 4MH-180780 FA

. . . . . . . . . . . . . . . .

× × ×	PS P	0-3 400/3/50 EU 0-0-3 400/3/50 EU 0-0-0-0-3 400/3/50 EU 0-0-0-0-0-0-0-0-0-0-0-0-0-0-0-0-0-0-0-	Cage LUS
MH 4M-200/960 FA MH 4M-200/960 FAX MH 4M-221/01/000 PAX MH 4M-221/01/000 PAX MH 4M-220/1000 FAX MH 5M-21/01/00 FAX MH 5M-21/01/100 FAX MH 5M-21/01/100 FAX MH 5M-21/01/100 FAX MH 5M-21/01/100 PAX MH 5M-21/01/200 PAX MH 6P-75/01/250 FAX MH 6P-75/01/250 FAX MH 6P-75/01/250 FAX MH 6P-20/1/300 FAX	MH 7P-180/1260 FAX MH 7P-180/1260 FAX MH 7P-180/1260 FAX MH 8P-180/2000 FAX SC UNO 4M-140/2000 FAX SC UNO 4M-140/200 FAX SC UNO 5M-200/1050 SC UNO 5M-200/1050 SC UNO 6P-160/2500 SC UNO 7P-180/1200 SC UNO 7P-180/1200 SC UNO 7P-180/200 SC UNO 7P-180/200 SC UNO 7P-180/200 SC UNO 7P-180/200 SC UNO 6P-160/2500 SC UNO 6P-	SC DELIA 81 100/2000 8 400/93/91 EU SH SOLAR 7P-170/1200 D SH SOLAR 7P-170/1200 E18 SH SOLAR 7P-170/1200 E18 SH SOLAR 7P-170/1200 E3 SH SOLAR 7P-170/1200 E3 SH SOLAR 7P-170/1200 E3 SH SOLAR 7P-170/1200 G SH SOLAR 7P-170/1200 G SH SOLAR 7P-170/1200 G SH AUTO SM-100/500 E MA AUTO SM-100/500 E MC 2C-160/740 PET MC 2C-160/740 PET MC 4C 220/770 PET	MC SC 250/940 PE MC SC 280/1000 PE MC SG 280/1000 PE MC SM 280/1100 PE MC SM 280/1100 PE PEUS MC 7P-220/1120 PE PEUS MH 7P-220/1120 PE MH 7P-220/1300 DE
	0 0000000		10737102
	0000000000		10737102
	000000000		10737102
	0 0000000		10737102
	0 0000000		10737103
			o 10626807
0000	00000000000000	000000000000	0 0 0 8117
0 0 0 0	0 0 0	0 0	8122
00000	00000000000000		8120
	00000000		8123
0 0 0 0 0	000000000000000	000000000000	0 0 0 8093
		0000000000	0 0 0 8115
			2500021
0 0 0 0 0			2300021
0 0 0 0 0			2500021
0000			30800015

<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

# **Detergents – Vehicle Cleaning**



	Product	Soiling	Fields of application	Tecl	hniqu	e	Size	Item No.
	RIM TOP SV1	•	Cleaning of steel and light alloy wheel rims.	À	<b>*</b>		10 L	105301660
	Basic rim cleaner.	•						
	Dilution: 5-10%; pH: 2-3 (1% solution)		-		***************************************	•		
			_					
			_					
				_		_		
	ALLOSIL SV1	•	Precleaning or main cleaning of cars, trucks,	<i>.</i> ∕₹		=1	40 L	105301630
	Coarse dirt remover.		busses, fork-lift trucks, etc.	۸,			25 L	105301629
	Dilution: 1-5%; pH: 12.5-13.5 (1% solution)							
			-					
	• • • • • • • • • • • • • • • • • • • •		• • • • • • • • • • • • • • • • • • • •	<b>.</b>	• • • • •	• • • • •		
	ACTIVE SHAMPOO SV1		Cleaning of cars, particularly in brush washing		1/4		25 L	105301625
	Foam cleaner – neutral.			4	DI-28	FI	231	105501025
	Dilution: 0.1-0.5%; pH: 11-11.4 (1% solution)		installations, but also in high-pressure and self-service car washes, etc.	. Air	•			
	Diation. 0.170.570, pri. 11-11.4 (170 3000001)		SCH SCHROOL CALL WASHES, CIC.					
	SUPER PLUS SV1		Cleaning of cars, trucks, busses and commercial	À		1	4 x 2.5 L	105301670
	Foam cleaner – alkaline.	<b>-</b>	vehicles in self-service car washes or by high	X.		W-58	10 L	105301666
	Dilution: 0.1-0.5%; pH: 12.5-13.5 (1% solution)		pressure washer.			•	25 L	105301667
			<u></u>				220 kg	105301668
					•••••		1000 kg	105301669
	-		-					
	AUTOACTIVE SV1	•	Cleaning of cars, trucks, busses and commercial	À		3/4	10 L	105301634
	Shampoo.	•	vehicles in self-service car washes or by high	λ.			25 L	105301635
	Dilution: 0.1-0.5%; pH: 10-11 (1% solution)		pressure washer.				220 L	105301636
					_	100		
	ACTIVE FOAM SV1	•	Cleaning of cars in brush washing installations	_171		16	25 L	105301624
	Shampoo and wax effect – neutral.		with feeble or too short drying zone.		λ.			
	Dilution: 0.1-0.5%; pH: 4-5 (1% solution)		-					
	CARRUIDE CV/1		Cleaning of care trucks because of course in	h	=	571	4 v 2 E I	105201661
	SAPPHIRE SV1 Shampoo and wax effect – alkaline.		Cleaning of cars, trucks, busses and commercial	-//T		à(A	4 x 2.5 L	105301661
	· · · · · · · · · · · · · · · · · · ·		vehicles in self-service car washes or by high	/i•			10 L 25 L	105301662
	Dilution: 0.1-0.5%; pH: 6.5-8 (1% solution)		pressure washer.				Z) L	105301663
	ACIDO SV1	•	Rust transformer/rust dissolver, lime/cement haze	À	Ŋ.		10 L	105301622
	Special cleaner.		remover in trade and industry; disinfectant	-/-		-	25 L	105301623
	Dilution: 1-3%; pH: <1 (1% solution)		agent in foodstuffs related sectors.					
					•••••			
				<del>.</del>				
• •	•••••		·····	· · • · · · ·				
				_				
	QUICK DRY SV1	□	For care and quick drying of vehicles in self-service		3/4		25 L	105301656
	Drying aid – concentrated.		and brush washing installations.					
	Dilution: 0.05-0.2%; pH: 6.5-8 (1% solution)							
					100	_		
	ACTIVE WAX		For care and quick drying of vehicles in self-service		3/4		10 L	81177
	Conservation agent with waxes.		and brush washing installations.		•		25 L	81222
	Dilution: 0.1-0.2%; pH: 3 (1% solution)		•					

# **Detergents – Industrial & Buildings**




Product	Soiling	Fields of application	Tech	nique	Size	Item No.
ACIDO SV1	•	Rust transformer/rust dissolver, lime/cement haze	)s	ж. 📹	10 L	105301622
All-round cleaner – acid.	•	remover in trade and industry; disinfectant	-4	/1• 📟	25 L	105301623
Dilution: 1-10%; pH: <1 (1% solution)		agent in foodstuffs related sectors.			231	10301023
UNIVERSAL SV1		Various cleaning tasks on a wide range of particularly	às.		4 x 2.5 L	105301681
All-round cleaner – neutral.			- 4	<b>■ ⊿</b> 1	4 X Z.3 L	105301681
•		delicate surfaces in trade and industry.	//ie	P7/		
Dilution: 0.5-10%; pH: 7-8 (1% solution)		-			25 L	105301679
-		•				
J 25 MULTI SV1	•	Cleaning of industrial and commecial floors, motor			4 x 2.5 L	105301651
All-round cleaner – alkaline.		vehicles, steel parts, motors/machines, walls, facades,	λ.		10 L	105301649
Dilution: 1-10%; pH: 10.5-11.5 (1% solution)		working surfaces, etc.			25 L	105301650
					220 kg	105301648
		•				
COMBI ACTIVE SV1	•	Cleaning of sturdy industrial floors, steel parts,	À		4 x 2.5 L	105301640
All-round cleaner – strongly alkaline.		motors/machines, working surfaces, etc.	λ.		10 L	105301638
Dilution: 1-10%; pH: 13-14 (1% solution)					25 L	105301639
					220 kg	105301637
		•				
DES 3000 SV1		Floor and hard surface cleaning in slaughterhouses,	)s		25 L	105301641
Disinfection cleaner.		bakeries, butchers' shops, cheese-making plants,	- 4	= =1	27.	1-010561
Dilution: 1-5%; pH: 7.5-8.5 (1% solution)	<b>=</b>	canteens, agriculture, pharmaceuticals plants, etc.	//ie			
υπατιοπ. 1-2 /υ, μπ. 7.2-0.2 (176 Solution)	Ц	canceris, agriculture, phalliaceuticals platits, etc.				
ALKAFOAM SV1		Hard surface cleaning of machines, walls, working	À	<b>⋒</b>	25 L	105301626
Foam cleaner.		surfaces and tiles, etc., particularly in slaughterhouses	=A	//i•	220 kg	105301627
Dilution: 1-5%; pH: >13.5 (1% solution)		and butchers' shops.			1000 L	105301627
•						
PHOSPHAT		Temporary corrosion protection for iron parts in	34		25 L	81232
Phosphating agent.	•	metal processing plants.				
Dilution: 0.5-1%; pH: 5.5 (1% solution)						
UNIKAL PLUS SV1		Metal processing plants and workshops.	À	<b>λ</b> .	10 L	105301684
Solvent-based cold cleaner.					25 L	105301685
Dilution: apply neat; pH: not applicable						
#1000000000000000000000000000000000000				•		
SUPER BLAST P	▼	Rust and paint removal and smoothing of sturdy			25 kg	8379
Sandblasting agent for high-pressure units.		industrial and commercial surfaces.				
Dilution: apply neat via wet spraying						
attachment; pH: not applicable						
	_	Carandhara kada asil 10		-	257	F240047
		Cars and buses, trucks and vans, hard floor, metal industry and special purpose.			25 kg	5218617
Ahrasiye agent for "Soft Blasting" baking		mean maasay ana special parpose.				
ARMEX Abrasive agent for "Soft Blasting", baking soda and slightly alkaline.		•				
Abrasive agent for "Soft Blasting", baking						
Abrasive agent for "Soft Blasting", baking soda and slightly alkaline.						

<sup>\*</sup> Suitable, but not for continuous use. Please read the product description carefully!



# **Detergents – Floor Care**

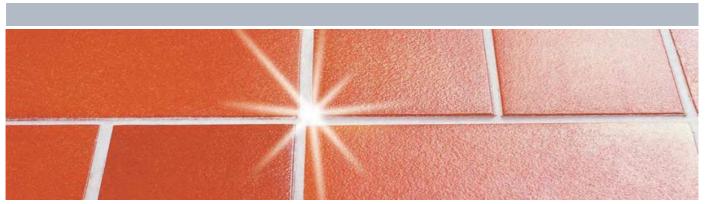

	Product	Soiling	Fields of application	Tech	nique	Size	Item No
	QUICK FRESH SV1		Daily floor cleaning in hotels, restaurants, car	عا	<b>%</b>	4 x 2.5 L	105301659
	Maintenance cleaner with refreshing effect.		showrooms, office buildings, supermarkets, schools,			10 L	10530165
	Dilution: 1-5%; pH: 6.5-8 (1% solution)		exhibition rooms, DIY markets, etc.		•	25 L	105301658
	Diation: 1 370, pri. 0.3 0 (170 solution)		exhibition rooms, or markets, etc.				103301030
				·····		-	
	WAX CLEAN SV1	•	Daily floor cleaning in hotels, restaurants, car	=1	<b>7. . .</b>	10 L	10530168
	Maintenance cleaner with gloss effect		showrooms, office buildings, supermarkets, schools,				
	Dilution: 1-3%; pH: 8-9 (1% solution)		exhibition rooms, DIY markets, etc.				
	INTENSIVE SV1	•	Various cleaning applications on a wide range of	1		4 x 2.5 L	10530164
S	All-round cleaner.	•	surfaces in trade and industry.	۸,	•	10 L	10530164
ō	Dilution: 3-10%; pH: 10.5-11.4 (1% solution)		•			25 L	10530164
윤	-		•		•	220 kg	10530164
, 0			•	•••••	•	1000 kg	10530164
Hard floors							
_					- 4		
	TORNADO SV1		Basic cleaning of sturdy commercial and industrial	-71	<b>=1</b>		1053016
	Basic cleaner.		floors for removing coatings, films or very			10 L	1053016
	Dilution: 3-10%; pH: 13-14 (1% solution)		severe soiling.			25 L	10530167
						220 kg	10530167
	SPOT-EX SV1		Floor cleaning in warehouses, workshops,	À	λ.	6 x 1 L	10530166
	Rubber scuff mark remover.		DIY markets, supermarkets, industrial buildings			10 L	10530166
	Dilution: apply neat; pH: 6.5-8 (1% solution)		with stacker and rubber markings.			•	
	······································		•••••	• • • • • • •	• • • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • • •	· · · • · · · · · · · · · · · ·
	TOP WASH SV1		Textile and hard floor cleaning in office buildings,	À		4 x 2.5 L	10530167
	Spray extraction cleaner.		schools, hotels, restaurants, banks, exhibition	A† Àn	7.	6 x 1 L	10530167
ō	Dilution: 1-5%; pH: 8.5-9.5 (1% solution)		rooms, etc.			10 L	10530167
<u>.</u>			•				
Textile floors	-		•		•		
∄			•	•	•	•	•
Ğ.					•	•	•
-							-
• • • • •	••••••		•••••	• • • • • • •	•••••	• • • • • • • • • • • • • • • • • • • •	· · · • · · · · · · · · · · · · · · · ·
	PRO GLOSS SV1	П	Floor sealing with gloss effect in schools, hotels,	λ,	7	10 L	10530165
	Floor gloss emulsion.		car showrooms, restaurants, supermarkets,				
	Dilution: apply neat; pH: 8-9 (1% solution)		medical practices, etc.				
ē						•	
Care	PROTECTOR SV1		Floor sealing for lasting protection in schools,	λ.	A	10 L	1053016
_	Floor polymer dispersion.		hotels, car showrooms, restaurants, supermarkets,				
	Dilution: apply neat; pH: 8-9 (1% solution)		medical practices, etc.				
				<u>-</u>		-	
· · · • · ·	••••••		•••••	• • • • • • •	• • • • • • • • • • • • • • • • • • • •	•••••	· · · • · · · · · · · · · · · · · · · ·
	FOAM STOP SV1		Foam combating for cleaning tasks with extreme	=i	À	6 x 1 L	10530164
LS S	Anti-foaming agent.		foam development in the recovery tank.				
	Dilution (waste water tank): 0.05%;		•			•	
Š	pH: 7.5-8 (1% solution)						
cnc							
procuc							
y procucts							
lary procuc							
cillary procuc							
Ancillary procuc							

**Explanation of symbols:** \* Suitable, but not for continuours use. Please read the product description carefully!

■ Greases, oils, soot, proteins, blood

 Sand, dirt, light oil and grease ▼ Lime, rust,

☐ Bacteria, viruses, fungi  Care, conservation, gloss, machine protection

# **Detergents – Care & Maintenance of machines and plants**



Product	Soiling	Fields of application	Technique	Size	Item No.
ANTI STONE SV1		Mobile and stationary high pressure washers and		6 x 1 L	105301631
Scaling protection agent. Dilution:		comparable systems.		10 L	105301632
Pour neat into the scaling protection				25 L	105301633
agent tanks; pH: 6.5-7.5 (1% solution)		-			
STONE EX			<u> </u>	10 L	81191
Descaling agent. Dilution:	······································	Mobile and stationary high pressure washers and comparable systems.	_ 🖳	25 L	81236
Pour neat into the water tank;		comparable systems.		23 L	81230
pH: 2.7 (1% solution)					
pri 2 (170 Jonaton)					
-					
MACHINE PROTECTOR SV1		Mobile and stationary hot water pressure		6 x 1 L	105301652
Boiler and machine protection agent against		washers with steel coils.			
corrosion of steel coils by soft, acidic water.		•			-
Dilution:		•			-
Pour neat into the scaling protection agent tanks		•			•
pH: <13 (1% solution)		*			

<sup>\*</sup> Suitable, but not for continuours use. Please read the product description carefully!





### Nilfisk SO4500 - Professional steam cleaners







#### The simplest way to steam

- 4.5 bar steam pressure, with 1.8L boiler and 5L reserve tank
- Maximum continuous use: 6 hours, with continuous-fill boiler
- Locking front wheels and automatic safety shut-off
- Durable, powder-coated steel construction


A compact, user-friendly solution for commercial use, the SO4500 excels at light- to medium-duty cleaning tasks. Suitable for all industry sectors, and all environments where vacuum recovery isn't a requirement, it is ideal for steam-only applications that don't require additional chemicals for sanitization.



TECHNICAL DATA	NILFISK SO4500 EU-UK
Voltage/phase/frequency/current (V/~/Hz/A)	230-240/1/50/10
Vacuum function	No
Steam temperature boiler (°C)	150
Water tank capacity (I)	5,0
Boiler volume (I)	1,8
Detergent tank (I)	No
Dimensions, L x W x H (mm)	420x320x460
Weight (kg)	12
Hose length (m)	4,0
El cable (m)	10
FEATURES	
Stainless steel frame	•
Single-phase	•
Steam function	•
Continuous fill boiler	•
Steam control switch	•
Automatic safety shut off	•
STANDARD EQUIPMENT	
55MM ROUND BRUSH	450000067
CURVED NOZZLE	450000063
DETAIL BRUSH NOZZLE	450000064
EXTENSION TUBE	450000057
FLOOR BRUSH	450000058
LARGE BRUSH ELBOW	450000060
LONG NOZZLE	450000062
MATRIX 4 METRE HOSE FOR STEAM ONLY	450000056
TRIANGULAR BRUSH	450000059
WINDOW SQUEEGEE	450000061
ITEM NO.	45000000

### Nilfisk SV8000 - Professional steam cleaners





- 8 bar steam pressure, with 3.3L boiler and 5L reserve tank
- Maximum continuous use: 12 hours, with continuous-fill boiler
- Removable waste-water tank with locking lid
- Wide accessory range included

Ideal for chemical-free cleaning in situations requiring minimal drying time, the vacuum-equipped SV8000 provides optimal hygiene at an optimal pace. It leaves any workspace sanitized, dry, and ready for use in less time, with significant recovery capacity, maneuverability, and runtime allowing it to handle the requirements of the largest zones.







TECHNICAL DATA	NILFISK SV8000 EU-UK
Voltage/phase/frequency/current (V/~/Hz/A)	230-240/1/50/13
Vacuum function	Yes
Steam temperature boiler (°C)	170
Water tank capacity (I)	5
Boiler volume (I)	3.3
	No.
Detergent tank (I)	8
Steam pressure (bar)	
Dimensions, L x W x H (mm)	800x400x820
Weight (kg)	25,0
Hose length (m)	4
El cable (m)	10
FEATURES	
Stainless steel frame	•
Single-phase	•
Steam function	•
Vacuum function	•
Continuous fill boiler	•
Steam control switch	•
Automatic safety shut off	•
STANDARD EQUIPMENT	
150MM STEAM AND VAC BRUSH	450000047
150MM STEAM AND VAC NOZZLE	450000046
150MM STEAM AND VAC SQUEEGEE	450000048
250MM GLASS WASHER	450000036
400MM CARPET INSERT	450000044
400MM FLOOR BRUSH INSERT	450000042
400MM FLOOR BRUSH NOZZLE	450000041
400MM SQUEEGEE INSERT	450000043
CREVICE TOOL	450000049
EXTENSION TUBE SINGLE	45000031
HOSE STEAM VAC AND DETERGENT	450000045
LONG STEAM LANCE	45000050
SHORT STEAM LANCE	450000051

450000037

45000002

ITEM NO.

UPHOLSTERY SUCTION TOOL

### Nilfisk SDV - Professional steam cleaners







### The ultimate steam-cleaning machine

- 4.5 bar pressure (SDV4500) or 8 bar pressure (SDV8000), with 1.8L or 3.3L boiler capacity respectively
- Maximum continuous use: 6 hours (SDV4500) or 8 hours (SDV8000) with continuous-fill boiler
- Detergent-injection system for lab-certified sanitization
- Removable waste-water tank with locking lid

Chemical-ready and vacuum-equipped, the lab-certified SDV models are built for heavy-duty, multi-purpose cleaning and disinfection. By offering detergent-injection in addition to standard steam-cleaning, both models make it easier to disinfect and dry the toughest, most hazardous environments. The smaller-capacity 4500 is ideal for shorter-duration use, while the full-size 8000 can run for up to 12 hours without a break.





TECHNICAL DATA	NILFISK SDV4500 EU-UK	NILFISK SDV8000 EU-UK
Voltage/phase/frequency/current (V/~/Hz/A)	230-240/1/50/13	230-240/1/50/13
Vacuum function	Yes	Yes
Steam temperature boiler (°C)	150	170
Water tank capacity (I)	2.5	5
Boiler volume (I)	1.8	3.3
Detergent tank (I)	2.5	2.5
Steam pressure (bar)	4.5	8
		700x450x970
Dimensions, L x W x H (mm)	700x450x880	
Weight (kg)	30	40
Hose length (m)	2.5	4
El cable (m)	10	10
FEATURES		
Single-phase	•	•
Steam function	•	•
Detergent function	•	•
Vacuum function	•	•
Continuous fill boiler	•	•
STANDARD EQUIPMENT		
150MM STEAM AND VAC BRUSH	450000047	450000047
150MM STEAM AND VAC SQUEEGEE	450000048	450000048
250MM GLASS WASHER	45000036	450000036
CARPET INSERT	450000035	450000044
FLOOR BRUSH INSERT	450000033	450000042
FLOOR BRUSH NOZZLE	450000032	450000041
SQUEEGEE INSERT	450000034	45000043
CREVICE TOOL	450000049	450000049
EXTENSION TUBE SINGLE	450000031	45000031
HOSE STEAM VAC AND DETERGENT	450000030	450000045
LONG STEAM LANCE	450000050	45000050
SHORT STEAM LANCE	450000051	45000051
UPHOLSTERY SUCTION TOOL	45000037	450000037
ITEM NO.	4500004	45000006



# **VP100 – Commercial dry vacs**





# Simple and easy-to-use vacuum cleaner – for general everyday cleaning

- Intuitive on/off switch
- Compact cable storage
- Accessory storage
- Simple dust bag replacement

VP100 offers you simple cleaning solution. Intuitive design with simple operation ensures that VP100 can be used with very little instruction.







TECHNICAL DATA	VP100
Rated power (W)	880
Suction power end of tube (W)	192
Airflow (l/sec.)	30
Dust bag capacity (I)	10
Length x width x height (mm)	340x320x340
Cable length (m)	8
Weight (kg)	5.2
FEATURES	
Storage of accessories	•
Cable storage	•
STANDARD EQUIPMENT	
HOSE CPL D32	147 0765 500
BRUSH NOZZLE D32	140 8244 500
CREVICE NOZZLE D32 L153 BLACK	147 0146 500
COMBI NOZZLE RD277 KIT	107411677
DSU8 AND DSU10 MAIN FILTER ASSEMBLY KIT	VA81235
EAGLE2 MOTR FRONT FILTER PLATE KIT	VA85064
EXTENSION TUBE STEEL D32	140 8246 040
ITEM NO.	50000470

### **VP300series – Commercial dry vacs**







# The reliable everyday vacuum cleaner – in an ergonomic and light-weight design

- Best-in-class filling capacity which means less time spent changing dust bags
- Weighs from just 5 kg making it easy to move from place to place
- Low sound pressure level from 58 dB(A) makes the machine suitable for daytime cleaning
- High filtration level with HEPA exhaust filter
- Secure and easy to reach accessory and power cord storage
- Dual speed on selected variants for tailored use in a wider variety of applications
- Detachable orange cord on selected variants
- VP300 can be carried safely and comfortably in one hand

The Nilfisk VP300 series is a basic, well-built and durable machine that can be relied upon to do the job day in and day out. It is ideal for cleaning offices, hotel rooms, retails outlets and similar light to medium duty applications.

The Nilfisk VP300 series has a top rated filtration level with a H13 HEPA exhaust filter as standard on all variants. This helps maintain a high quality of air within the cleaning environment.







TECHNICAL DATA	VP300 ECO HEPA EU	VP300 HEPA BASIC EU	VP300 HEPA NORDIC	VP300 HEPA EU1	VP300 HEPA EU2
Rated power (W)	400	800	800/400	800/400	800/400
Suction power end of tube (W)	110	215	215/110	215/110	215/110
Airflow (l/sec.)	25	32	32/25	32/25	32/25
Dust bag capacity (I)	10	10	10	10	10
Length x width x height (mm)	395x340x390	395x340x390	395x340x390	395x340x390	395x340x390
Cable length (m)	10	10	15	15	10
Weight (kg)	5	5.5	5.5	5.5	5.5
FEATURES					
Detachable cord			•	•	•
Dust bag 1 pcs.	•	•	•	•	•
With fixed cable	•	•			
Hepa filtration	•	•	•	•	•
Two speed			•	•	•
H13 Exhaust filter	•	•	•	•	•
STANDARD EQUIPMENT					
HOSE CPL D32	147 0765 500	147 0765 500	147 0765 500	147 0765 500	147 0765 500
EXTENSION TUBE ALUMINIUM					011 6431 500
TELESCOPIC TUBE ACC.	107403804				
TELESCOPIC TUBE ALUMINIUM			011 8130 500	011 8130 500	
CREVICE NOZZLE	107408039	107408039	107408039	107408039	107408039
BRUSH NOZZLE D32		140 8244 500	140 8244 500	140 8244 500	140 8244 500
CREVICE NOZZLE D32 L153 BLACK			147 0146 500	147 0146 500	147 0146 500
COMBI NOZZLE RD295P W.CLIP		107417790			107417790
NA38 COMBI NOZZLE WO CLICK KIT	107418965				
NOZZLE MULTI SURFACE 32 MM			140 6700 540	140 6700 540	
SACK FILTER	147 1432 500	147 1432 500	147 1432 500	147 1432 500	147 1432 500
HEPA FILTER H13	147 1250 600	147 1250 600	147 1250 600	147 1250 600	147 1250 600
DETACH CORD SET 10M ORANGE EU					107402676
DETACH CORD SET 15M ORANGE EU			107402901	107402901	
EXTENSION TUBE STEEL D32		140 8246 040			
ITEM NO.	107415311	107415322	1074142284	41600870	41600871

# GD 930 / VP930 - Commercial dry vacs







# A famous and well-known workhorse – efficient and durable for large area cleaning

- Excellent sound level
- Outstanding durability with sturdy steel container
- High quality components
- High filling capacity, 15 litre dust bag
- HEPA H13 exhaust filtration as standard
- Nozzle parking
- Dual speed function on selected variants

Nilfisk VP930 is the reliable partner for demanding cleaning applications in hotels, schools, offices and hospitals. Rugged and stable with a large dust bag capacity of 15 litres.

The ingenious design optimises air flow patterns and reduces energy losses to an absolute minimum, offering one of the quietest professional vacuum cleaners in the world





TECHNICAL DATA	VP930 ECO HEPA EU A++	VP930 HEPA Basic EU	VP930 HEPA EU S2	VP930 PRO HEPA BLUE
Rated power (W)	400	760	760/400	760/400
Suction power end of tube (W)	120	240	240	240
Airflow (I/sec.)	26	33	33/26	33/26
Dust bag capacity (I)	15	15	15	15
Length x width x height (mm)	440x390x330	440x390x330	440x390x330	440x390x330
Cable length (m)	15	15	15	15
Weight (kg)	7.9	7.9	7.9	7.9
FEATURES				
Dust bag, 5 pcs.			•	•
Inside painted container	•	•	•	•
Two speed			•	•
Downstream HEPA filter	•	•	•	
Upstream HEPA filter				•
STANDARD EQUIPMENT				
HOSE ALU.HANDLE D32 1.9 m	140 2782 500	140 2782 500	140 2782 500	140 2782 500
EXTENSION TUBE ALUMINIUM		011 6431 500	011 6431 500	011 6431 500
TELESCOPIC TUBE ALUMINIUM	011 8130 500			
COMBI NOZZLE RD295P W.CLIP		107417790	107417790	107417790
NA38 COMBI NOZZLE WO CLICK KIT	107418965			
CREVICE NOZZLE	010 3098 500		010 3098 500	010 3098 500
SMALL COMBI NOZZLE	011 3104 500	011 3104 500	011 3104 500	011 3104 500
FILTER MAIN FOAM GD930	140 1515 500	140 1515 500	140 1515 500	140 1515 500
MOTOR FILTER	140 1535 510	140 1535 510	140 1535 510	140 1535 510
HEPA FILTER H13	147 1250 600	147 1250 600	147 1250 600	140 2666 010
DUST BAG 5-PCS			140 7015 020	140 7015 020
ITEM NO.	107415450	107415451	107415453	107420590

### **VP600 – Commercial dry vacs**







# Efficient and environmentally friendly cleaning – with innovative and flexible features

- 330/550W or 730/330 fan unit with energy rating ranging from A++ to A
- Dual speed function for optimized power consumption and cleaning performance
- HEPA exhaust filter as standard
- New magnetic closing of dust compartment securing high reliability and ease of use
- Available with standard cord, detachable cord or cord rewind
- Best in class sound quality

Nilfisk VP600 is the efficient and advanced choice ensuring cost-effective cleaning of applications such as hotels, contract cleaning, restaurants, offices and institutions.

VP600 offers a wide range of features to choose from and you can find exactly the variant that fits your specific cleaning job. Choose the cord solution that suits you and helps you reduce cleaning time and improve the cleaning process. Great user benefits and clever design offers you what you'd expect from a Nilfisk vacuum cleaner.



TECHNICAL DATA	VP600 ECO HEPA	VP600 HEPA BASIC EU	VP600 HEPA STD 2 EU	VP600 HEPA STD 3 EU
Sound power level dB(A) IEC/EN 60335-2-69	70/74	62	74/70	74/70
Rated power (W)	330/550	730	730/330	730/330
Suction power end of tube (W)	75/155	200	200/75	200/75
Airflow (I/sec.)	24/28	30	30/24	30/24
Dust bag capacity (I)	10	10	10	10
Length x width x height (mm)	480x300x270	480x300x270	480x300x270	480x300x270
Cable length (m)	15	10	15	10
Weight (kg)	7	7	7	7
FEATURES	,	,	,	,
Detachable cord	•		•	
Dust bag 1 pcs.	•	•	•	•
Dual power	•		•	•
Hepa filtration	•	•	•	•
Cable rewind				•
Ergonomic handle	•	•	•	•
STANDARD EQUIPMENT				
HOSE CPL D32	147 0765 500	147 0765 500	147 0765 500	147 0765 500
EXTENSION TUBE ALUMINIUM		011 6431 500		
TELESCOPIC TUBE ALUMINIUM	011 8130 500		011 8130 500	011 8130 500
CREVICE NOZZLE	107408039	107408039	107408039	107408039
BRUSH NOZZLE D32	140 8244 500	140 8244 500	140 8244 500	140 8244 500
NE10 NOZZLE			107413075	107413075
NA38 COMBI NOZZLE WO CLICK KIT	107418965			
NOZZLE MULTI SURFACE 32 MM		140 6700 540		
HEPA FILTER H13	147 1250 600	147 1250 600	147 1250 600	147 1250 600
SACKFILTER BASIC	107413056	107413056	107413056	107413056
DETACH CORD SET 15M ORANGE EU	107402901		107402901	
POWER MODULE DETACH EU	107413044		107413044	
POWER MODUL FIXED EU		107413043		
POWER MODUL REWINDER EU				107413048
ITEM NO.	107418540	107418541	41600860	41600861

### **VP600 BATTERY – Commercial dry vacs**







#### Cordless vacuum cleaning at its powerful best

- High productivity with up to 60 minutes runtime on a fully charged battery
- Fast battery charging in just 40 minutes offers continous cleaning with the use of two batteries
- Excellent cleaning performance with power boost function for heavy duty cleaning
- Battery driven cleaning offers greater freedom and mobility to clean just about anywhere with no need for electricity and trailing or rewind of cables
- Safe cleaning environment with no risk of guest or operator tripping over a cord
- Optimized battery capacity: Intelligent Nilfisk technology monitors the 36V Lithium batteries during both operation and charging
- Best in class sound pressure level from just 56 db(A) enabling cost-effective daytime cleaning
   HEPA H13 exhaust filter as standard ensuring
- HEPA H13 exhaust filter as standard ensuring a clean environment for the user and the surroundings

The Nilfisk VP600 Battery vacuum cleaner is a flexible dual-speed machine boosting your productivity – thanks to its cordless mobility and runtime of up to 60 minutes. With a charge time of only 40 minutes the machine offers you non-stop cleaning performance by switching between two 36V Lithium batteries.



TECHNICAL DATA	VP600 Battery	VP600 BATTERY EU (2 BATTERIES)	VP600 BATTERY – EXCL CHARGER
Rated power (W)	650	650	650
Suction power end of tube (W)	45/116	45/116	45/116
Airflow (l/sec.)	21.7/26.7	21.7/26.7	21.7/26.7
Dust bag capacity (I)	10	10	10
Length x width x height (mm)	480x300x270	480x300x270	480x300x270
Weight (kg)	7.2	7.2	7.2
Battery charge time (min.)	≤ 40	≤ 40	n/a
Battery run time (min.)	60/30	60/30	60/30
Filter type	H13	H13	H13
FEATURES			
Dust bag 1 pcs.	•	•	•
Battery version	•	•	•
HEPA H13 main filter	•	•	•
STANDARD EQUIPMENT			
HOSE CPL D32	147 0765 500	147 0765 500	147 0765 500
TELESCOPIC TUBE ALUMINIUM	011 8130 500	011 8130 500	011 8130 500
CREVICE NOZZLE	107408039	107408039	107408039
BRUSH NOZZLE D32	140 8244 500	140 8244 500	140 8244 500
COMBI NOZZLE RD295P W.CLIP	107417790	107417790	107417790
NOZZLE MULTI SURFACE 32 MM	140 6700 540	140 6700 540	140 6700 540
HEPA FILTER H13	147 1250 600	147 1250 600	147 1250 600
SACKFILTER BASIC	107413056	107413056	107413056
BATTERY FAST CHARGER LI 500W – EU	41600864	41600864	
BATTERY LI 36V 10S4P + VP600B BATT COVER	41600869	41600869	41600869
ITEM NO.	41600821	41600901	41600900

### **GD5/10 BACK - Commercial dry vacs**







#### Efficient cleaning with convenience

- Low sound level for operator comfort and cleaning in noise-sensitive areas
- Lightweight vacuum cleaner and a harness that is ergonomically designed to reduce fatigue
- Good filtration with HEPA exhaust filter
- Durable construction for longer working life
- Containers in different sizes to fit the application
- 15 metre detachable cable with safety release saves
   \*ima
- Easy to store as it stands on the floor or can be wall hung
- Suitable for left or right handed use
- Exhaust air designed so that it does not interfere with the operator

The Nilfisk GD 5/GD 10 backpack vacuums surpass all criteria, with technical advancement that shows in every Nilfisk product, making fast productive cleaning at a price that won't bust your budget.

There are many things that should be present in a good backpack vacuum cleaner. It should be light in weight, with even weight distribution, and the noise level must be as low as possible. Without these basics, a backpack vacuum cleaner is uncomfortable and impractical to operate





TECHNICAL DATA	GD10 BACK HEPA EU	GD5 BACK HEPA BASIC EU	GD5 BACK HEPA EU
Rated power (W)	780	780	780
Suction power end of tube (W)	225	225	225
Airflow (I/sec.)	33	33	33
Dust bag capacity (l)	10	5	5
Length x width x height (mm)	380x260x570	380x260x570	380x260x570
Cable length (m)	15	15	15
Weight (kg)	5	4.5	4.5
FEATURES			
Outlet for electro nozzle			•
STANDARD EQUIPMENT			
HOSE CONICAL COMPLETE	147 1236 500	147 1236 500	147 1236 500
EXTENSION TUBE ALUMINIUM		011 6431 500	
TELESCOPIC TUBE ALUMINIUM	011 8130 500		011 8130 500
BRUSH NOZZLE D32	140 8244 500		140 8244 500
CREVICE NOZZLE BLACK	22302100		22302100
COMBI NOZZLE RD295P W.CLIP	107417790	107417790	107417790
SACK FILTER 10L	147 1099 500		
SACK FILTER 5 L		147 1100 500	147 1100 500
HEPA FILTER H13	147 1250 600	147 1250 600	147 1250 600
HARNESS PREMIUM CPL	147 1246 510		147 1246 510
HARNESS STD.CPL		147 1090 510	
DUST BAG KIT 5L 5-PCS			147 1098 500
ITEM NO.	107417927	107417934	107417935

### **GD 5 Battery – Commercial dry vacs**







TECHNICAL DATA

#### Backpack vacuum that requires no electrical connections

- Maximum freedom and mobility thanks to the cordless and ergonomic backpack design
- High productivity with up to 60 minutes of runtime on a fully charged 36V Lithium battery
- Best in class charge time of only 40 minutes offers continuous cleaning with the use of two batteries
- Safer cleaning environment for guests, visitors and the operator with no cord to trip over
- Optimal performance with boost function adds suction power for heavy duty cleaning
- Low sound pressure level enabling cost-effective daytime cleaning
- Optional HEPA filter available for optimized air quality

CDE D-44-

The Nilfisk GD 5 Battery vacuum cleaner offers all you need to get the job done faster – leaving the need for cords and power outlets behind you.

The backpack design will let you work with ease! Being compact and mobile, the Nilfisk GD 5 Battery will deal effectively with dust in facilities with limited space between seats, tables, and shelves. The machine is an ideal choice for cafes, restaurants, shops, cinemas, auditoriums and conference rooms, as well as transportation.



TECHNICAL DATA	GD5 Battery
Rated power (W)	650
Suction power end of tube (W)	45/116
Airflow (I/sec.)	21.7/26.7
Dust bag capacity (I)	5
Length x width x height (mm)	240x330x755
Weight (kg)	5.3
Sack filter area (cm²)	1397
Battery charge time (min.)	≤ 40
Battery run time (min.)	60/30
FEATURES	
Dust bag 1 pcs.	•
Battery version	•
STANDARD EQUIPMENT	
HOSE CONICAL COMPLETE	147 1236 500
TELESCOPIC TUBE ALUMINIUM	011 8130 500
CREVICE NOZZLE	107408039
BRUSH NOZZLE D32	140 8244 500
COMBI NOZZLE RD295P W.CLIP	107417790
NOZZLE MULTI SURFACE 32 MM	140 6700 540
PRE FILTER	147 1095 500
SACK FILTER 5 L	147 1100 500
BATTERY FAST CHARGER LI 500W – EU	41600864
BATTERY LI 36V 10S4P + BATTERY HANDLE	41600872
ITEM NO.	41600841

# VU500 – Upright vacs







## Exceptional cleaning performance for medium and low cut piles

- Quick release cord clip
- Detachable power cable removal for quick service
- Tools-free brush removal
- Non-marking, tear resistant bumper
- Convenient handle for lifting
- Standard certified H13 HEPA filter

VU500 delivers exceptional cleaning performance in an easy to use, easy to maintain upright vacuum that is designed to withstand stringent environmental requirements.

Automatic, self-adjusting brush height ensures proper cleaning performance and maximum productivity especially when cleaning on the medium and low cut piles.





TECHNICAL DATA	VU500 12-300MM EU	VU500 15-380MM EU
C		
Sound power level dB(A) IEC/EN 60335-2-69	80	80
Rated power (W)	900	900
Suction power end of tube (W)	130	130
Airflow (l/sec.)	27	27
Dust bag capacity (l)	3.5	3.5
Length x width x height (mm)	330x318x1180	330x390x1180
Cable length (m)	10	10
Weight (kg)	8	8.5
FEATURES		
Detachable cord	•	•
Compact design	•	•
Cable storage	•	•
No tool brush removal	•	•
Ergonomic handle	•	•
Hose storage holders	•	•
STANDARD EQUIPMENT		
HOSE STRETCHABLE	147 0950 500	147 0950 500
CREVICE NOZZLE D35	147 1203 500	147 1203 500
HEPA FILTER H13	147 1250 600	147 1250 600
BRUSH 12INCH RED	107407697	107407697
BRUSH 15 INCH		147 0930 510
EXTENSION TUBE 35MM	147 0851 500	147 0851 500
ITEM NO.	107418426	107418433

# **GU700A – Upright vacs**







## The heavy-duty upright vac for easy and efficient cleaning

- 64 cm cleaning path 2 vacuum motors ensuring a high vacuuming performance
- 1 brush motor
- Built in hose and tube for hard to reach areas

GU700A is an optimal upright solution for daily vacuum cleaning of large carpet areas. This heavy-duty machine makes operations easy and efficient.

The separate motors for the brush and vacuum, provide high performance and durability together with an in depth cleaning of even solid mud and other dirt




TECHNICAL DATA	GU700A
Rated power (W)	2250
Tank capacity (l)	35
Suction power end of tube (W)	na
Airflow (l/sec.)	52
Dust bag capacity (I)	35
Length x width x height (mm)	1040x750x970
Cable length (m)	23
Weight (kg)	51
FEATURES	
Motor-driven brush	•
ITEM NO.	56330910

# VL200 - Commercial wet & dry vacs







## Compact and handy wet & dry vacuum cleaner

- Push & Clean filter cleaning technology
- Washable PET fleece filter
- Certified HEPA filter available as an accessory
- MultiFit accessory system with telescopic tube
- Convenient accessory and cable storage
- Exhaust air blow function
- Stainless steel container option

The Nilfisk VL200 is a compact and easy-to-use wet and dry vacuum cleaner with Push & Clean filter cleaning system and convenient accessory storage. A mobile machine available also with a stainless steel container for the extra tough environments.





TECHNICAL DATA	VL200	VL200 inox
Rated power (W)	1200	1200
Tank capacity (l)	20	30
Suction power end of tube (W)	250	250
Airflow (I/sec.)	48	48
Dust bag capacity (I)	14	14
Cable length (m)	10	10
Length x width x height (mm)	380x390x510	390x400x640
Weight (kg)	9.5	11
FEATURES		
Stainless steel container		•
Washable PET fleece filter	•	•
Push&Clean filter cleaning	•	•
Storage of accessories	•	•
Cable storage	•	•
Hose holder	•	•
Fleece filter bag 1 pcs.	•	•
STANDARD EQUIPMENT		
HOSE D32 1.9M CPL	107407308	107407308
TELESCOPIC TUBE 1130MM D32	81906500	81906500
FLOOR NOZZLE D32 RUBBER STRIP	107407310	107407310
FLOOR NOZZLE D32 BRUSH	107407311	107407311
BRUSH NOZZLE D32	107407312	107407312
CREVICE NOZZLE D32	107407334	107407334
FILTERELEMENT ATTIX	302000490	302000490
TELESCOPIC TUBE HOLDER KIT D32	107409978	107409978
ITEM NO.	107406660	107420060

# VL100 – Commercial wet & dry vacs





- Stainless steel tubes
- Drain hose
- Foam & Dry filters
- Stainless steel containers

The VL100 is the perfect choice when what you need is fast efficient cleaning with no frills attached. Strong, robust and reliable – all your basic wet & dry cleaning needs covered in this straight forward product line.







TECHNICAL DATA	VL100-35 EU GO	VL100-55 EU GO	VL100-75 EU GO
Rated power (W)	1000	2000	2000
Suction power end of tube (W)	210	380	380
Airflow (l/sec.)	31	52	52
Dust bag capacity (I)	18.2	28.1	44.4
Cable length (m)	8	8	8
Weight (kg)	10	20	20.5
FEATURES			
Tube holder		•	•
Dual filter system		•	•
Storage of accessories		•	•
Cable storage	•	•	•
Drain hose		•	•
STANDARD EQUIPMENT			
HOSE D32 1.9M CPL	107407308		
HOSE D40 2.5M CPL		107407336	107407336
WET FLOOR NOZZLE Ø32 RUBBER STRIP	VA82025		
WET FLOOR NOZZLE Ø40 RUBBER STRIP		VA81845	VA81845
FLOOR NOZZLE D32 BRUSH	107407311		
FLOOR NOZZLE D40 BRUSH		107407339	107407339
BRUSH NOZZLE D32	107407312		
CREVICE NOZZLE D32	107407334		
CREVICE NOZZLE D40		107408850	107408850
55L ABSORBING DUST FILTER		VA80119	VA80119
CLOTH FILTER ASSEMBLY	VA81990		
EXTENSION TUBE D32 – SS	107407309		
EXTENSION TUBE D40 – SS		107407337	107407337
ITEM NO.	50000340	50000350	50000360

# VL500-35 - Commercial wet & dry vacs







## The future of wet and dry vacuum cleaning

- The dual filtration system allows the machine to clean both wet and dry applications without the need to change filter
- Multi fit hose connector, stainless steel tube, accessory storage and nozzle parking
- Easy changing of filters with a hinged motor head to protect the machine and speed up the process

The VL500 series of wet and dry vacuum cleaners is offering performance and reliability that ensure low total cost of ownership and at the same time, has features making daily cleaning tasks easier, faster and safer.



TECHNICAL DATA	VL500 35 BSF	VL500 35 EDF
Rated power (W)	1350	1350
Tank capacity (I)	35	35
Suction power end of tube (W)	250	250
Airflow (l/sec.)	48	48
Dust bag capacity (I)	18	18
Length x width x height (mm)	460x420x730	460x420x730
Weight (kg)	11.5	12.5
Cartridge filter area (cm²)	-	2070
Sack filter area (cm²)	1051	-
Wet filter area (cm²)	-	1051
FEATURES		
Tube holder	•	•
Dual filter system		•
Storage of accessories	•	•
STANDARD EQUIPMENT		
HOSE D32 1.9M CPL	107407308	107407308
HARDFLOOR NOZZLE 300MM x Ø32MM – KIT	107416575	107416575
FLOOR NOZZLE D32 BRUSH	107407311	107407311
BRUSH NOZZLE D32	107407312	107407312
CREVICE NOZZLE D32	107407334	107407334
CARTRIDGE FILTER		107407297
SACK FILTER	107407296	
WET FILTER		107407299
EXTENSION TUBE D32 – SS	107407309	107407309
ITEM NO.	107405155	107405160

# VL500-55 - Commercial wet & dry vacs







## The future of wet and dry vacuum cleaning

- Empty the container without having to remove the motor head makes operation fast and easy without risk of damage to critical components
- By transferring the weight as you lift the container, the Nilfisk Ergo Tipping system enables you to empty a completely filled container of fluid without excessive effort
- Easy changing of filters with the hinged motor head protects the machines and speeds up the process
- With the dual filtration system, the VL500 can be used in both wet or dry applications without the need to change filters

The VL500 series of wet and dry vacuum cleaners is offering performance and reliability that ensure low total cost of ownership and at the same time has features making daily cleaning tasks easier, faster and safer.



TECHNICAL DATA	VL500 55-1 BDF	VL500 55-1 BSF	VL500 55-1 EDF	VL500 55-2 BDF	VL500 55-2 BSF	VL500 55-2 EDF
Rated power (W)	1350	1350	1350	2500	2500	2500
Tank capacity (I)	55	55	55	55	55	55
Suction power end of tube (W)	200	200	200	200	200	200
Airflow (l/sec.)	48	48	48	72	72	72
Dust bag capacity (I)	28	28	28	28	28	28
Length x width x height (mm)	840x620x1000	840x620x1000	660x620x890	840x620x1000	840x620x1000	660x620x890
Weight (kg)	24.5	23.5	26.5	25.5	24.5	27.5
Cartridge filter area (cm²)	4410	-	4410	4410	-	4410
Sack filter area (cm²)	-	1840	-	-	1840	-
Wet filter area (cm²)	1840	-	1840	1840	-	1840
FEATURES						
Dual power				•	•	•
Dual filter system	•		•	•		•
Folding transport handle			•			•
Adjustable handle			•			•
Storage of accessories	•	•	•	•	•	•
Drain hose	•	•	•	•	•	•
Ergo tipping			•			•
STANDARD EQUIPMENT						
HOSE D40 2.5M CPL	107407336	107407336	107407336	107407336	107407336	107407336
HARDFLOOR NOZZLE 400MM x Ø40MM – KIT	107416577	107416577	107416577	107416577	107416577	107416577
FLOOR NOZZLE D40 BRUSH	107407339	107407339	107407339	107407339	107407339	107407339
CREVICE NOZZLE D40	107408850	107408850	107408850	107408850	107408850	107408850
CARTRIDGE FILTER	107407300		107407300	107407300		107407300
SACK FILTER		107407304			107407304	
WET FILTER	107407302		107407302	107407302		107407302
TUBEHOLDER D40	107407335	107407335	107407335	107407335	107407335	107407335
EXTENSION TUBE D40 – SS	107407337	107407337	107407337	107407337	107407337	107407337
ITEM NO.	107407459	107405156	107405161	107407460	107405157	107405162

## VL500-75 - Commercial wet & dry vacs







## The future of wet and dry vacuum cleaning

- Quick release adjustable push handle for easy and ergonomic maneuvering of the machine
- Emptying the container without having to remove the motor head makes operation fast and easy without risk of damage to critical components
- By transferring the weight as you lift the container, the Nilfisk Ergo Tipping system enables you to empty a completely filled container of fluid without excessive effort
- Easy changing of filters with the hinged motor head protects the machines and speeds up the process
- The VL500 can be used in both wet or dry applications without the need to change filters

The VL500 series of wet and dry vacuum cleaners is offering performance and reliability that ensure low total cost of ownership and at the same time has features making daily cleaning tasks easier, faster and safer.



TECHNICAL DATA	VL500 75-1 BSF	VL500 75-1 EDF	VL500 75-2 BDF	VL500 75-2 BSF	VL500 75-2 EDF
Rated power (W)	1350	1350	2500	2500	2500
Tank capacity (I)	75	75	75	75	75
Suction power end of tube (W)	200	200	200	200	200
Airflow (l/sec.)	48	48	72	72	72
Dust bag capacity (I)	44	44	44	44	44
Length x width x height (mm)	840x620x1000	660x620x1030	840x620x1000	840x620x1000	660x620x1030
Cable length (m)	10	10	10	10	10
Weight (kg)	26	27.5	28	27	28.5
Sack filter area (cm²)	1840	-	-	1840	-
Wet filter area (cm²)	-	1840	1840	-	1840
FEATURES					
Dual power			•	•	•
Dual filter system		•	•		•
Folding transport handle		•			•
Adjustable handle		•			•
Storage of accessories	•	•	•	•	•
Drain hose	•	•	•	•	•
Ergo tipping		•			•
STANDARD EQUIPMENT					
HOSE D40 2.5M CPL	107407336	107407336	107407336	107407336	107407336
HARDFLOOR NOZZLE 400MM x Ø40MM – KIT	107416577	107416577	107416577	107416577	107416577
FLOOR NOZZLE D40 BRUSH	107407339	107407339	107407339	107407339	107407339
CREVICE NOZZLE D40	107408850	107408850	107408850	107408850	107408850
CARTRIDGE FILTER		107407300			107407300
SACK FILTER	107407304			107407304	
WET FILTER		107407302			107407302
TUBEHOLDER D40	107407335	107407335	107407335	107407335	107407335
EXTENSION TUBE D40 – SS	107407337	107407337	107407337	107407337	107407337
ITEM NO.	107405158	107405163	107407462	107405159	107405164

## **Overview of accessories**



**Nozzles**Upholstery nozzle, round brush, crevice nozzle



**Floor nozzles**Combination and multi surface nozzles



**Electro nozzle**For use on carpets



**Dust bag**Synthetic



**Dust bag** Paper bags



Wet and dry filter For VL500 series



Sack filter



**Tubes**Chrome, steel, aluminium.
Telescopic or basic



**Cover HEPA**For VL500 series



**HEPA filter** For VP930



**Hose** For VP930



## **SALTIX 10 – Commercial vacuum cleaners**





## Your reliable and compact choice for everyday use

- Weighs just 5.5 kg making it easy to move from place to place
- Large 10 litre container with 8 litre dust bag net filling
- Detachable orange cord
- Entire machine, including hose and wand, can be carried safely and comfortably in one hand
- Certified HEPA filter as standard
- Lightweight aluminium tube

The SALTIX 10 is ideal for cleaning of hotels, offices, shops or similar light to medium duty applications. With a sound pressure of just 62 dB(A), it makes this vacuum suitable for daytime cleaning of noise-sensitive areas as it causes minimum disturbance to people who are within the cleaning vicinity.

The powerful motor and high quality nozzle ensures superior efficiency and the durable design makes sure that the machine can be relied upon day in and day out.



TECHNICAL DATA	SALTIX 10
Airflow rate (I/min.)	1940
Vacuum (mbar/kPa)	220/22
Power Piec (W)	800
Sound pressure level (dB(A) BS 5415)	62
Dust bag capacity (I)	8
Volt/frequency (V/Hz)	220/50-60
Weight (kg)	5.5
Cable length (m)/ plug type	10
Hose length (m)	1.9
Length x width x height (mm)	395x340x390
Sound pressure level DB(A) IEC/EN 60335-2-69	62
FEATURES	
Detachable cord	•
Dust bag (1 pcs)	•
STANDARD EQUIPMENT	
HEPA FILTER H13	147 1250 600
SACK FILTER	147 1432 500
DETACH CORD SET 10M ORANGE EU	107402676
HOSE CPL D32	147 0765 500
EXTENSION TUBE ALUMINIUM	011 6431 500
NOZZLE MULTI SURFACE D32	140 6700 570
BRUSH NOZZLE D32	140 8244 500
CREVICE NOZZLE D32 L153 BLACK	147 0146 500
ITEM NO.	107415328

# MAXXI II 35 WD – Commercial wet & dry vacs





## Simple and powerful wet & dry vacuum cleaner

- Dual filter system to handle different substances without human intervention
- Easy emptying (with motor head fitted)
- Stainless steel tube
- Intuitive single handed locking mechanisms
- Wet sack filter protecting the motor from foam ingress
- Flexible and handy mounting of tools and accessories

MAXXI II 35 offers easy and efficient wet & dry use without filter changing. The unique dual filter allows the machine to be used for both wet and dry applications without the need to change filters. Thanks to MulitFit connection the MAXXI II tools are compatible with all ATTIX accessories.



TECHNICAL DATA	MAXXI II 35 WD
Airflow rate (I/min.)	2880
Vacuum (mbar/kPa)	200/20
Power Piec (W)	1250
Sound pressure level (dB(A) BS 5415)	62
Tank capacity (I)	35
Dust bag capacity (I)	18
Volt/frequency (V/Hz)	220-240/50-60
Weight (kg)	12.5
Cable length (m)/ plug type	10/EU
Hose length (m)	1.9
Length x width x height (mm)	460x420x740
FEATURES	
Tube holder	•
Dual filter system	•
Accessory holders	•
STANDARD EQUIPMENT	
BRUSH STRIPS FOR 60356	60358
CARTRIDGE FILTER	107407297
WET FILTER	107407299
HOSE D32 1.9M CPL	107407308
EXTENSION TUBE D32 - SS	107407309
HARDFLOOR NOZZLE 300MM x Ø32MM - KIT	107416575
FLOOR NOZZLE D32 BRUSH	107407311
BRUSH NOZZLE D32	107407312
CREVICE NOZZLE D32	107407334
ITEM NO.	107405165

# MAXXI II 55 WD - Commercial wet & dry vacs





## Simple and powerful wet & dry vacuum cleaner

- Dual filter system to handle different substances without human intervention
- Easy emptying (with motor head fitted)
- Stainless steel tube
- Intuitive single handed locking mechanisms
- Wet mesh sack filter protecting the motor from foam ingress
- Flexible and handy mounting of tools and accessories
- Fixed steel push handle
- Standard tipping mechanism
- Transparent drain hose for indication of water level in the container
- The containers can be easily lifted off the trolley for cleaning or maintenance
- When tipping, the container pivots on the steel push handle





TECHNICAL DATA	MAXXI II 55-2 WD
Airflow rate (I/min.)	2880
Vacuum (mbar/kPa)	210/21
Power Piec (W)	2400
Sound pressure level (dB(A) BS 5415)	66
Tank capacity (I)	55
Dust bag capacity (l)	28
Volt/frequency (V/Hz)	220-240/50-60
Weight (kg)	25.5
Cable length (m)/ plug type	10/EU
Hose length (m)	2.5
Length x width x height (mm)	840x620x1000
FEATURES	
Tube holder	•
Dual filter system	•
Cable storage	•
Accessory holders	•
Drain hose	•
Dual motor	•
STANDARD EQUIPMENT	
CARTRIDGE FILTER	107407300
WET FILTER	107407302
HOSE D40 2.5M CPL	107407336
EXTENSION TUBE D40 - SS	107407337
HARDFLOOR NOZZLE 400MM x Ø40MM - KIT	107416577
FLOOR NOZZLE D40 BRUSH	107407339
CREVICE NOZZLE D40	107408850
ITEM NO.	107405167

## MAXXI II 75 WD - Commercial wet & dry vacs





## Simple and powerful wet & dry vacuum cleaner

- Dual filter system to handle different substances without human intervention
- Easy emptying (with motor head fitted)
- Stainless steel tube
- Intuitive single handed locking mechanisms
- Wet mesh sack filter protecting the motor from foam ingress
- Flexible and handy mounting of tools and accessories
- Fixed steel push handle
- Standard tipping mechanism
- Transparent drain hose for indication of water level in the container
- The containers can be easily lifted off the trolley for cleaning or maintenance
- When tipping, the container pivots on the steel push handle

MAXXI II 75 offers easy and efficient wet & dry use without filter changing. The unique dual filter makes it possible to clean both wet and dry applications without the need of changing filters. Thanks to MulitFit all MAXXI II tools are compatible with the ATTIX accessories.





TECHNICAL DATA	MAXXI II 75-1 WD	MAXXI II 75-2 WD
Airflow rate (I/min.)	2880	2880
Vacuum (mbar/kPa)	200/20	210/21
Power Piec (W)	1250	2400
Sound pressure level (dB(A) BS 5415)	64	66
Tank capacity (I)	75	75
Dust bag capacity (I)	44	44
Volt/frequency (V/Hz)	220-240/50-60	220-240/50-60
Weight (kg)	27	28
Cable length (m)/ plug type	10/EU	10/EU
Hose length (m)	2.5	2.5
Length x width x height (mm)	840x620x1000	840x620x1000
FEATURES		
Tube holder	•	•
Dual filter system	•	•
Cable storage	•	•
Accessory holders	•	•
Drain hose	•	•
Dual motor		•
STANDARD EQUIPMENT		
CARTRIDGE FILTER	107407300	107407300
WET FILTER	107407302	107407302
HOSE D40 2.5M CPL	107407336	107407336
EXTENSION TUBE D40 - SS	107407337	107407337
HARDFLOOR NOZZLE 400MM x Ø40MM - KIT	107416577	107416577
FLOOR NOZZLE D40 BRUSH	107407339	107407339
CREVICE NOZZLE D40	107408850	107408850
ITEM NO.	107405168	107405169

## - Compact single-phase wet & dry vacs





## Compact wet&dry vacuum cleaner with filter cleaning and simple features

- Washable PET fleece filter with minimum 99.9% filtration efficiency
- MultiFit accessory system for ultimate flexibility
- Convenient accessory and cable storage Exhaust air blow function
- Stabile wheels and ergonomic design for safe

AERO 21 is the smallest model in the AERO series with compact design and easy to use features such as Push&Clean filter cleaning system and convenient accessory storage. The 20 liter machine has efficient suction performance and is found with optional INOX stainless steel container with robust trolley and lifting handle. Power socket with AutoOnOff is found on (-21) models, which activates the machine by the connected drilling, sanding or cutting tool. AERO 21 offers great help keeping both air and surroundings clean and reducing the overall sound level.







TECHNICAL DATA	AERO 21-01 PC	AERO 21-01 PC INOX	AERO 21-21 PC	AERO 21-21 PC INOX	AERO 21-0H PC
Airflow rate (I/min.)	3600	3600	3600	3600	3600
Vacuum (mbar/kPa)	210/21	210/21	210/21	210/21	210/23.5
Power Pmax (W)	1250	1250	1250	1250	1200
Power Piec (W)	1000	1000	1000	1000	1000
Working sound level (dB(A))	64	64	64	64	61
Container volume (I-max)	20	20	20	20	20
Mains connection (V/~/Hz/A)	230/1/50-60/16	230/1/50-60/16	230/1/50-60/16	230/1/50-60/16	230V/50-60/16
ength x width x height (mm)	375x385x505	390x400x525	375x385x505	390x400x525	375x390x530
Weight (kg)	7.5	8.5	7.5	8.5	8.5
El cable (m)	5	5	5	5	5
Main filter type	PET	PET	PET	PET	PFTE H14
Filter cleaning system	Push&Clean	Push&Clean	Push&Clean	Push&Clean	Push&Clean
FEATURES					
Stainless steel container		•		•	
Automatic On/Off-elec. tools			•	•	
Extra socket for tool			•	•	
Hose holder			•	•	
Fleece filter bag 1 pcs	•	•	•	•	•
Container lift/tilt handle		•	•	•	•
STANDARD EQUIPMENT					
SUCTION HOSE D32x1800 CPL.	107405600	107405600			107405600
SUCTION HOSE D32X2500 CPL.			107405599	107405599	
EXTENSION TUBE D36 2X500MM ALU	107400032	107400032	107400032	107400032	
EXTEN.TUBE STEEL D35X505MM CR					302000529
TOOL ADAPTER WITH SUCTION REGULATION D32			107409977	107409977	
FLOOR NOZZLE D36x300MM W/D KIT	107402706	107402706	107402706	107402706	
FLOOR NOZZLE D36 W/D					107402331
SUCTION BRUSH D36 BLACK					302002509
JNIVERSAL NOZZLE D36X115	14295	14295	14295	14295	14295
CREVICE NOZZLE D36X200	29541	29541	29541	29541	29541
Filter cartridge D185x140 PTFE HEPA H-Class					107420373
FILTERELEMENT ATTIX	302000490	302000490	302000490	302000490	
ITEM NO.	107406600	107406602	107406601	107406603	107420062

## AERO 26 – Compact single-phase wet & dry vacs





# Compact wet&dry vacuum cleaner with filter cleaning and ergonomic design

- Washable PET fleece filter with minimum 99.9% filtration efficiency
- MultiFit accessory system for ultimate flexibility
- Convenient accessory/cable storage and tool deposit
- Exhaust air blow function
- Flexible rubber strap for hose storage
- Optional cable rewind model
- L-class model with variable speed control

AERO 26 is the featuring model of the AERO series with high focus on application and end-user needs. Push&Clean filter cleaning system and exhaust air blow function is found on all models together with flexible and convenient accessory storage. The 25 liter machine has efficient suction performance and is available with optional cable rewind system. Power socket with AutoOnOff is found on (-21) models, which activates the machine by the connected drilling, sanding or cutting tool. The AERO 26 offers great help keeping both air and surroundings clean and reducing the overall sound level.







TECHNICAL DATA	AERO 26-01 PC X	AERO 26-21 PC	AERO 26-2L PC
Airflow rate (I/min.)	3600	3600	3700
Vacuum (mbar/kPa)	210/21	210/21	245
Power Pmax (W)	1250	1250	1500
Power Piec (W)	1000	1000	1200
Working sound level (dB(A))	64	64	61
Container volume (I-max)	25	25	25
, ,	230/1/50-60/16	230/1/50-60/16	230/1/50-60/16
Mains connection (V/~/Hz/A)			
Length x width x height (mm)	375x390x530	375x390x530	375x390x530
Weight (kg)	9	9	10
El cable (m)	5	5	7.5
Main filter type	PET	PET	PET
Filter cleaning system	Push&Clean	Push&Clean	Push&Clean
FEATURES			
Softstart			•
Motor speed control			•
Automatic On/Off-elec. tools		•	•
Cable rewind	•		
L-class hazardous dust approval			•
Fleece filter bag 1 pcs	•	•	•
Container lift/tilt handle	•	•	•
STANDARD EQUIPMENT			
SUCTION HOSE D32x1800 CPL.	107405600		
SUCTION HOSE D32X3500 CPL.		107406115	107409976
UNIV HOSE WITH HAND TUBE D32X3500 CPL.			302002509
EXTENSION TUBE D36 2X505MM ST/CR		302000529	302000529
TELESCOPIC TUBE D36 575-930MM CR-ST	107402654		29541
TOOL ADAPTER WITH SUCTION REGULATION D32		107409977	107402331
FLOOR NOZZLE D36x300MM W/D KIT		107402706	14295
COMBI NOZZLE Ø36X260MM	302002365		302000490
BRUSH NOZZLE Ø36X230 PP/PA			
UNIVERSAL NOZZLE D36X115	14295	14295	107420459
SUCTION BRUSH D36 BLACK	302002509	302002509	133.323.32
CREVICE NOZZLE D36X200	29541	29541	107409977
Filterelement ATTIX	302000490	302000490	302000490
TOOL BOX. AERO 26/31		352555136	107409980
100L 00/1. ALIKO 20/31	107406605		107703300

# **AERO 26 – Singlephase for hazardous dust**





- The industry's first compact safety vacuum cleaner that helps you work safely and can be moved around your workshop with ease
- Upgraded with the latest technology including state-of-art air velocity measurement system and a double sealed filter enabling high performance of your vacuum cleaner
- Smart operation via Bluetooth remote control enables easier ON/OFF functionality, auto detection of power tools, alarm notification, and more convenient operation
- Protects from electric shock with fully antistatic hose system
- Reduced noise level the latest AERO SAFETY series makes significantly less noise than previous models to ensure your comfort and safety while working

The new AERO SAFETY takes compact vacuum cleaners to another level, so you can enjoy premium performance, enhanced usability, and improved safety. From independent workshops to light industry – a versatile vacuuming solution is a must to ensure your safety on the job.





TECHNICAL DATA	AERO 26-2M PC	AERO 26-W2M PC	AERO 26-2H PC	AERO 26-W2H PC
Airflow rate (I/min.)	3700	3700	3700	3700
Vacuum (mbar)	245	245	245	245
Power Pmax (W)	1500	1500	1500	1500
Power Piec (W)	1200	1200	1200	1200
Working sound level (dB(A))	61	61	61	61
Container volume (I-max)	25	25	25	25
Mains connection (V/~/Hz/A)	230/1/50-60/16	230/1/50-60/16	230/1/50-60/16	230/1/50-60/16
Length x width x height (mm)	375x390x530	375x390x530	375x390x530	375x390x530
Weight (kg)	10	10	10	10
El cable (m)	7.5	7.5	7.5	7.5
Main filter type	PET	PET	PET	PET
Filter cleaning system	Push&Clean	Push&Clean	Push&Clean	Push&Clean
FEATURES				
Anti-static system	•	•	•	•
Bluetooth remote w/ AutoSense		•		•
Auto Start Stop for power tools	•	•	•	•
Hose inlet plug	•	•	•	•
Container lifting handle	•	•	•	•
Rubber strap for cable storage	•	•	•	•
Tube parking 2-point	•	•	•	•
Non-marking rubber back wheels	•	•	•	•
STANDARD EQUIPMENT				
SUCTION HOSE D32X4000 RED AS CPL.	107413543	107413543	107413543	107413543
SUCTION HOSE HIGH END D32X3500 CPL GRAY				
SUCTION BRUSH D36 BLACK	302002509	302002509	302002509	302002509
EXTEN.TUBE STEEL D35X505MM CR	302000529	302000529	302000529	302000529
CREVICE NOZZLE D36X200	29541	29541	29541	29541
FLOOR NOZZLE D36 W/D	107402331	107402331	107402331	107402331
UNIVERSAL NOZZLE D36X115	14295	14295	14295	14295
FILTER CARTRIDGE D185X140 PET M-CLASS	302000490	302000490		
FILTER CARTRIDGE D185X140 PTFE HEPA H-CLASS			107420373	107420373
TOOLBOX	107420459	107420459	107420459	107420459
TOOL ADAPTER D27 QUICKSYSTEM AS	302000535	302000535	302000535	302000535
TOOL ADAPTER WITH RUBBER NOZZLE				
ITEM NO.	107420043	107420047	107420051	107420055

## **AERO 31 INOX – Compact single-phase wet & dry vacs**





## Stainless wet&dry vacuum cleaner with filter cleaning and big capacity

- Washable PET fleece filter with minimum 99.9% filtration efficiency
- MultiFit accessory system for ultimate flexibility
- Convenient accessory and cable storage and tool deposit
- Exhaust air blow function
- Stainless steel container
- Flexible rubber strap for hose storage

AERO 31 INOX is the big capacity model of the AERO series with high focus on application and end-user needs. Push&Clean filter cleaning system and exhaust air blow function is standard together with flexible and convenient accessory storage. The 30 liter machine has efficient suction performance and a durable stainless steel container with robust trolley. Power socket with AutoOnOff activates the machine by the connected drilling, sanding or cutting tool. The AERO 31 INOX offers great help keeping both air and surroundings clean and reducing the overall sound level.



TECHNICAL DATA	AERO 31-21 PC INOX
Airflow rate (I/min.)	3600
Vacuum (mbar/kPa)	210/21
Power Pmax (W)	1250
Power Piec (W)	1000
Working sound level (dB(A))	64
Container volume (I-max)	30
Mains connection (V/~/Hz/A)	230/1/50-60/16
Length x width x height (mm)	390x400x635
Weight (kg)	10.5
El cable (m)	5
Main filter type	PET
Filter cleaning system	Push&Clean
FEATURES	
Stainless steel container	•
Automatic On/Off-elec. tools	•
Extra socket for tool	•
Fleece filter bag 1 pcs	•
STANDARD EQUIPMENT	
SUCTION HOSE D32X3500 CPL.	107406115
EXTENSION TUBE D36 2X505MM ST/CR	302000529
TOOL ADAPTER WITH SUCTION REGULATION D32	107409977
FLOOR NOZZLE D36x300MM W/D KIT	107402706
UNIVERSAL NOZZLE D36X115	14295
SUCTION BRUSH D36 BLACK	302002509
CREVICE NOZZLE D36X200	29541
FILTERELEMENT ATTIX	302000490
ITEM NO.	107406607

# ATTIX 30 – Single-phase wet & dry vacs





# Silent and mobile wet & dry industrial vacuum cleaners with superior suction power

- Low working sound level
- SilentPower high performance that is seen, but not heard
- MultiFit accessory system for the ultimate in task flexibility
- Washable PET fleece filter with minimum 99.9% filtration efficiency
- Accessory storage and tool deposit

ATTIX 30 series represent our compact and powerful range of all purpose Wet&Dry vacuum cleaners - a perfect solution for craftsmen on the move.

The ergonomic design and low noise level emphasise our focus on real user benefits and longer working time.



TECHNICAL DATA	ATTIX 30-01	ATTIX 30-01 PC	ATTIX 30-11 PC	ATTIX 30-21 PC
Airflow rate (I/min.)	3700	3700	3700	3700
Vacuum (mbar/kPa)	250/25	250/25	250/25	250/25
Power Pmax (W)	1500	1500	1500	1500
Power Piec (W)	1200	1200	1200	1200
Working sound level (dB(A))	59	59	59	59
Container volume (I-max)	30	30	30	30
Mains connection (V/~/Hz/A)	230/1/50-60/16	230/1/50-60/16	230/1/50-60/16	230/1/50-60/16
Length x width x height (mm)	450x380x595	450x380x595	450x380x595	450x380x595
Weight (kg)	10	10	10	10
El cable (m)	7.5	7.5	7.5	7.5
Main filter type	PET	PET	PET	PET
Filter cleaning system		Push&Clean	Push&Clean	Push&Clean
FEATURES				
Softstart			•	•
Anti-static system			•	•
Motor speed control				•
Automatic On/Off-elec. tools				•
Storage of accessories	•	•	•	•
Extra socket for tool			•	•
Fleece filter bag 1 pcs	•	•	•	•
STANDARD EQUIPMENT				
UNIV HOSE WITH HAND TUBE D32X3500 CPL.	107409976	107409976	107409976	107409976
EXTENSION TUBE D36 2X500MM ALU	107400032	107400032	107400032	
EXTENSION TUBE D36 2X505MM ST/CR				302000529
TOOL ADAPTER WITH SUCTION REGULATION D32			107409977	107409977
FLOOR NOZZLE D36x300MM W/D KIT	107402706	107402706	107402706	
FLOOR NOZZLE D36X400MM W/D				302003666
UNIVERSAL NOZZLE D36X115			14295	
CREVICE NOZZLE Ø36X300 PP	6084	6084	6084	6084
FILTERELEMENT ATTIX	302000490	302000490	302000490	302000490
ITEM NO.	107413590	107413591	107413592	107407544

# ATTIX 40 INOX – Single-phase wet & dry vacs





# The perfect combination of high performance and robustness in moist applications

- High quality stainless steel container
- Low working sound level SilentPower high performance that is seen, but not heard
- MultiFit accessory system for the ultimate in task flexibility
- Washable PET fleece filter with minimum 99.9% filtration effciency
- Accessory storage and tool deposit

ATTIX 40 is the ideal Wet&Dry vacuum cleaner, if you need high performance in combination with a compact quality stainless steel container. The robust and easy to clean stainless steel container and the high suction power makes ATTIX 40 the perfect solution for commercial and industrial use.





TECHNICAL DATA	ATTIX 40-01 PC INOX	ATTIX 40-21 PC INOX
Airflow rate (I/min.)	3700	3700
Vacuum (mbar/kPa)	250/25	250/25
Power Pmax (W)	1500	1500
Power Piec (W)	1200	1200
Working sound level (dB(A))	59	59
Container volume (I-max)	37	37
Mains connection (V/~/Hz/A)	230/1/50-60/16	230/1/50-60/16
Length x width x height (mm)	450x440x735	450x440x735
Weight (kg)	13	14
El cable (m)	7.5	7.5
Main filter type	PET	PET
Filter cleaning system	Push&Clean	Push&Clean
FEATURES		
Softstart	•	•
Anti-static system	•	•
Motor speed control		•
Automatic On/Off-elec. tools		•
Storage of accessories	•	•
Extra socket for tool		•
Fleece filter bag 1 pcs	•	•
STANDARD EQUIPMENT		
UNI. HOSE Ø36X3000MM W COUPLING EVA	46948	
HOSE Ø36X5000MM AS W COUPLING		302001682
CURVED HAND TUBE Ø36MM SS	46691	
EXTENSION TUBE Ø36 2X505MM SS	107408074	
TOOL ADAPTER D27 QUICKSYSTEM		302000535
FLOOR NOZZLE D36X400MM W/D	302003666	
CREVICE NOZZLE D36X200	29541	
FILTERELEMENT ATTIX	302000490	302000490
ITEM NO.	107413593	302003415

# ATTIX 50 – Single-phase wet & dry vacs





# Superior suction power for high-frequency cleaning and large container volume

- Low working sound level SilentPower high performance that is seen, but not heard
- MultiFit accessory system for the ultimate in task flexibility
- Washable PET fleece filter with minimum 99.9% filtration efficiency
- Accessory storage and tool deposit
- AntiStatic System

ATTIX 50 combines high Wet&Dry performance with big container capacity - the ideal solution for demanding customers with high frequency cleaning. The improved ergonomic design ensures functional and user-friendly operation - all in all an effcient and reliable solution.









TECHNICAL DATA	ATTIX 50-01 PC	ATTIX 50-21 PC	ATTIX 50-21 PC CLEAN ROOM	ATTIX 50-21 PC EC
Airflow rate (I/min.)	3700	3700	3200	3200
Vacuum (mbar/kPa)	250/25	250/25	230/23	230/23
Power Pmax (W)	1500	1500	1400	1400
Power Piec (W)	1200	1200	1100	1100
Working sound level (dB(A))	59	59	60	60
Container volume (I-max)	47	47	47	47
Mains connection (V/~/Hz/A)	230/1/50-60/16	230/1/50-60/16	230/1/50-60/16	230/1/50-60/16
Length x width x height (mm)	450x380x750	450x380x750	450x380x750	450x380x750
Weight (kg)	11	11	11	11
El cable (m)	7.5	7.5	7.5	7.5
Main filter type	PET	PET	HEPA	PET
Filter cleaning system	Push&Clean	Push&Clean	Push&Clean	Push&Clean
FEATURES				
Softstart	•	•	•	•
Anti-static system	•	•	•	•
Motor speed control		•	•	•
Automatic On/Off-elec. tools		•	•	•
Brushless longlife 1-ph. motor			•	•
Storage of accessories	•	•	•	•
Fleece filter bag 1 pcs	•	•	•	•
STANDARD EQUIPMENT				
UNI. HOSE Ø36X3000MM W COUPLING EVA	46948			
HOSE Ø36X5000MM AS W COUPLING		302001682	302001682	302001682
CURVED HAND TUBE D36MM ST/CR	302000528	302000528		
EXTENSION TUBE D36 2X505MM ST/CR	302000529	302000529		
TOOL ADAPTER D27 QUICKSYSTEM		302000535	302000535	302000535
FLOOR NOZZLE D36X400MM W/D	302003666	302003666		
CREVICE NOZZLE D36X200	29541	29541		
Filterelement ATTIX	302000490	302000490		302000490
FILTER ELEMENT Ø211X140 H-CLASS			302000658	
MOTOR COOLING FILTER KIT			302003721	
EXHAUST AIR COLLECTOR			302003717	
ITEM NO.	302003411	107407545	107400412	107400411

# ATTIX 33 – Single-phase wet & dry vacs







#### Superior and powerful dust extractor

- InfiniClean™ Automatic filter cleaning system with minimized performance loss
- PTFE long-life filter with non-stick membrane and minimum 99,9% filtration efficiency
- Dust class L certification
- Unique dual filter solution available with HEPA filtration.
- 30 liter container with steel castors and robust bumper.
- MultiFit accessory system for the ultimate in task flexibility
- Flexible rubber straps, tool box storage and optional trolley handle for convenient storage and transport
- Optional motor cooling filter, exhaust air collector and Long-Life filter bag

The ATTIX 33 dust extractor series sets a new standard for design and feature level of the Nilfisk wet & dry vacuum portfolio. With innovative filtration system, improved performance and robust design, this range represents a superior solution for professional customers looking for a safe and reliable machine. ATTIX 33 comes with more suction power, sealed dust system, automatic filter cleaning and several other user benefits - designed to meet the tough requirements in building & constructions and other industries.







TECHNICAL DATA	ATTIX 33-01 IC	ATTIX 33-2L IC	ATTIX 33-2L IC MOBILE
Airflow rate (I/min.)	4500	4500	4500
Vacuum (mbar/kPa)	250/25	250/25	250/25
Power Pmax (W)	1400	1400	1400
Power Piec (W)	1200	1200	1200
	60	60	60
Working sound level (dB(A))	30	30	
Container volume (I-max)			30
Mains connection (V/~/Hz/A)	230/1/50-60/16	230/1/50-60/16	230/1/50-60/16
Length x width x height (mm)	565x385x520	565x385x520	565x385x565
Weight (kg)	14.5	14.5	16
El cable (m)	7.5	7.5	7.5
Main filter type	PTFE	PTFE	PTFE
Filter cleaning system	InfiniClean	InfiniClean	InfiniClean
FEATURES			
Softstart	•	•	•
Anti-static system	•	•	•
Automatic on/off - electric tools		•	•
L-class hazardous dust approval		•	•
Disposal bag 1 pcs	•	•	•
Fleece filter bag 1 pcs.			•
Tool box storage system			•
STANDARD EQUIPMENT			
UNIV HOSE WITH HAND TUBE D32X3500 CPL.	107409976	107409976	
CURVED HAND TUBE Ø36MM SS			46691
EXTENSION TUBE Ø36 2X505MM SS		107408074	
EXTENSION TUBE D36 2X505MM ST/CR	302000529		
TOOL ADAPTER D27 QUICKSYSTEM			302000535
TOOL ADAPTER WITH SUCTION REGULATION D32		107409977	
EXTENSION TUBE D36 3X350 MM SS			107416995
FLOOR NOZZLE Ø36X300MM	302002331	302002331	302002331
UNIVERSAL NOZZLE D36X115			14295
SUCTION BRUSH D36 BLACK			302002509
CREVICE NOZZLE D36X200	29541	29541	29541
HOSE Ø32X4000MM AS RED			107413543
FLAT FILTER PTFE M-CLASS 1 PCS	107413540	107413540	107413540
ADAPTER PLATE KIT			107413551
FLEXIBLE STRAP SET 2 PCS		107413553	
TROLLEY HANDLE KIT			107413552
ITEM NO.	107412101	107412103	107412104

## ATTIX 44 - Single-phase wet & dry vacs





#### Superior and large capacity dust extractor

- InfiniClean™ Automatic filter cleaning system with minimized performance loss
- PTFE long-life filter with non-stick membrane and minimum 99.9% filtration efficiency
- Dust class L certification
- Unique dual filter solution available with HEPA filtration.
- 42 liter container with steel castors and robust bumper.
- MultiFit accessory system for the ultimate in task flexibility
- Flexible rubber straps, tool box storage and optional trolley handle for convenient storage and transport
- Optional motor cooling filter, exhaust air collector and Long-Life filter bag

The ATTIX 44 dust extractor series sets a new standard for design and feature level of the Nilfisk wet & dry vacuum portfolio. With innovative filtration system, improved performance and robust design, this range represents a superior solution for professional customers looking for a safe and reliable machine with large capacity. ATTIX 44 comes with more suction power, sealed dust system, automatic filter cleaning and several other user benefits - designed to meet the tough requirements in building & constructions and other industries when picking up bigger amounts of dust





TECHNICAL DATA	ATTIX 44-2L IC	ATTIX 44-2L IC MOBILE
Airflow rate (I/min.)	4500	4500
Vacuum (mbar/kPa)	250/25	250/25
Power Pmax (W)	1400	1400
Power Piec (W)	1200	1200
Working sound level (dB(A))	60	60
Container volume (I-max)	42	42
Mains connection (V/~/Hz/A)	230/1/50-60/16	230/1/50-60/16
Length x width x height (mm)	565x385x605	565x385x650
Weight (kg)	16	17.5
El cable (m)	7.5	7.5
Main filter type	PTFE	PTFE
Filter cleaning system	InfiniClean	InfiniClean
FEATURES		
Softstart	•	•
Anti-static system	•	•
Automatic on/off - electric tools	•	•
L-class hazardous dust approval	•	•
Disposal bag 1 pcs	•	•
Fleece filter bag 1 pcs.		•
Tool box storage system		•
STANDARD EQUIPMENT		
UNIV HOSE WITH HAND TUBE D32X3500 CPL.	107409976	
CURVED HAND TUBE Ø36MM SS		46691
EXTENSION TUBE Ø36 2X505MM SS	107408074	
TOOL ADAPTER D27 QUICKSYSTEM TOOL ADAPTER WITH SUCTION REGULATION		302000535
D32	107409977	
EXTENSION TUBE D36 3X350 MM SS		107416995
FLOOR NOZZLE D36X400MM W/D	302003666	302003666
UNIVERSAL NOZZLE D36X115		14295
SUCTION BRUSH D36 BLACK		302002509
CREVICE NOZZLE D36X200	29541	29541
HOSE Ø32X4000MM AS RED	107112510	107413543
FLAT FILTER PTFE M-CLASS 1 PCS	107413540	107413540
ADAPTER PLATE KIT	107412552	107413551
FLEXIBLE STRAP SET 2 PCS TROLLEY HANDLE KIT	107413553	107413552
	107412106	
ITEM NO.	107412106	107412107

# ATTIX 7 – Single-phase wet & dry vacs







- High quality stainless steel container with tilt and lift-off option
- Low working sound level SilentPower high performance that is seen, but not heard
- MultiFit accessory system for the ultimate in task flexibility
- Washable PET fleece filter with minimum 99.9% filtration efficiency
- Accessory storage and tool deposit
- AntiStatic system and Softstart

ATTIX 7 is perfect for users who need a big capacity and highly efficient vacuum cleaner with a robust steel chassis. This model has a high suction power with a low noise level. ATTIX 7 is a genuine solution for professional use within wet and dry applications.











TECHNICAL DATA	ATTIX 751-11	ATTIX 751-21	ATTIX 761-21 XC	ATTIX 791-21 EC
Airflow rate (I/min.)	3600	3600	3600	3800
Vacuum (mbar/kPa)	230/23	230/23	230/23	250/25
Power Pmax (W)	1500	1500	1500	1500
Power Piec (W)	1200	1200	1200	1200
Working sound level (dB(A))	57	57	57	59
Container volume (I-max)	70	70	70	70
Mains connection (V/~/Hz/A)	230/1/50-60/16	230/1/50-60/16	230/1/50-60/16	230/1/50-60/16
Length x width x height (mm)	605x580x970	605x580x970	605x580x970	605x580x970
Weight (kg)	25	25	27	25
El cable (m)	7.5	7.5	7.5	7.5
Main filter type	PET	PET	PET Nano	PET
Filter cleaning system			XtremeClean	
FEATURES				
Filter bag	•	•	•	•
Tilting container	•	•	•	•
Motor speed control		•	•	•
Automatic On/Off-elec. tools		•	•	•
Brushless longlife 1-ph. motor				•
Extra socket for tool	•	•	•	•
Disposal bag 1 pcs			•	
STANDARD EQUIPMENT				
UNI. HOSE Ø36X4000MM EVA	25537			
CURVED HAND TUBE Ø36MM SS	46691			
DIA. TUBE NOZZLE Ø36x190 MM GREY RUBBER	5067			
HOSE D27X3500 AS WITH TOOL ADAPTER		107406091	107406091	107406091
TOOL ADAPTER D27/36-24 AS		107404520	107404520	107404520
Filterelement ATTIX	302000490	302000490		302000490
FILTER ELEMENT D275X187 PET NANO M-CLASS			107400562	
ITEM NO.	302001523	302001525	302001533	302001536

# ATTIX 7 LIQUID VACUUM - Single-phase wet & dry vacs







## Big capacity with disposal pump for demanding wet applications

- Built-in disposal pump for continously and automatic liquid discharge
- Double filter sieve system in stainless steel
- IP68 plug connection
- High quality stainless steel container with tilt and lift-off option
- Low working sound level SilentPower high performance that is seen, but not heard
- MultiFit accessory system for the ultimate in task flexibility
- AntiStatic system and Softstart

ATTIX 7 LIQUID VACUUM is specially designed for demanding wet applications like flood pickup, road spills and clean up after fires. Build for users who need easy liquid discharge, high suction power and robust construction combined with high mobility.





TECHNICAL DATA	ATTIX 751-61 LIQUID VAC	ATTIX 751-71 MWF
Airflow rate (I/min.)	3600	3600
Vacuum (mbar/kPa)	230/23	230/23
Power Pmax (W)	1500	1500
Power Piec (W)	1200	1200
Working sound level (dB(A))	57	57
Container volume (I-max)	70	70
Mains connection (V/~/Hz/A)	230/1/50-60/16	230/1/50-60/16
Length x width x height (mm)	605x580x970	510x480x875
Weight (kg)	33	31
El cable (m)	7.5	10
Main filter type	Wet filter sieve	Wet filter sieve
FEATURES		
Cable holder	•	•
Softstart	•	•
Tilting container	•	•
Motor speed control	•	•
Robust steel chassis	•	•
300 l/m auto. discharge pump	•	•
Ground fault circuit breaker (PRCD)		•
STANDARD EQUIPMENT		
SUCTION HOSE Ø36X3500 HEAT/OIL-RESISTANT		302001677
CURVED HAND TUBE Ø36MM SS		46691
EXTENSION TUBE Ø36 2X505MM SS		107408074
NOZZLE ALU. 450XØ36MM WET		15349
CREVICE NOZZLE Ø36X300 PP		6084
WET FILTER SIEVE Ø143X140MM SS	15475	15475
BOX FOR SUCTION HOSE ATTIX 7		302001554
ITEM NO.	302001529	107412020

# ATTIX 961-01 - Single-phase wet & dry vacs





# Two-motor driven industrial Wet&Dry vacuum cleaners for the toughest applications

- Dual-motor industrial performance
- High quality stainless steel container with tilt and lift-off option
- Washable PET fleece filter with minimum 99.9% filtration efficiency
- MultiFit accessory system for the ultimate in task flexibility
- Accessory storage and tool deposit

The big capacity of 70 liter and stainless steel container keeps emptying to a minimum and ensures longer working time. High suction power and low sound enables ATTIX 961 to be used in a wide varity of conditions.



TECHNICAL DATA	ATTIX 961-01
Airflow rate (I/min.)	2 x 3600
Vacuum (mbar/kPa)	250/25
Power Pmax (W)	2 x 1500
Power Piec (W)	2 x 1200
Working sound level (dB(A))	67
Container volume (I-max)	70
Mains connection (V/~/Hz/A)	230/1/50-60/16
Length x width x height (mm)	580x600x970
Weight (kg)	30
El cable (m)	10
Main filter type	PET Nano
Filter cleaning system	Push&Clean
FEATURES	
Softstart	•
Tilting container	•
Anti-static system	•
Robust steel chassis	•
Fleece filter bag 1 pcs	•
STANDARD EQUIPMENT	
UNI. SUCTION HOSE Ø38X4000MM EVA	302002796
CURVED HAND TUBE D38 MM SS	302002889
EXTENSION TUBES R38 2X500 KIT	107402474
FLOOR NOZZLE D38x400 WET AND DRY	302002798
CREVICE NOZZLE Ø38x300 MM PP	302002890
FILTER ELEMENT D275X187 PET NANO M-CLASS	107400562
ITEM NO.	302002900

# ATTIX 965-21 SD XC – Single-phase wet & dry vacs





## Two-motor performance for heavy-duty cleaning

- Dual-motor industrial performance
- High quality stainless steel container with steel chassis
- Washable PET fleece filter with minimum 99.9% filtration efficiency
- MultiFit accessory system for the ultimate in task flexibility
- Accessory storage and tool deposit

The big capacity stainless steel container of the ATTIX 965-21 SD keeps emptying to a minimum and ensures longer working time. The practical SitDown container system makes emptying convenient for fast and productive cleaning.



TECHNICAL DATA	ATTIX 965-21 SD XC
Airflow rate (I/min.)	2 x 3600
Vacuum (mbar/kPa)	250/25
Power Pmax (W)	2 x 1500
Power Piec (W)	2 x 1200
Working sound level (dB(A))	67
Container volume (I-max)	50
Mains connection (V/~/Hz/A)	230/1/50-60/16
Length x width x height (mm)	615x690x990
Weight (kg)	45
El cable (m)	10
Main filter type	PET Nano
Filter cleaning system	XtremeClean
FEATURES	
Softstart	•
Anti-static system	•
Motor speed control	•
Robust steel chassis	•
Automatic On/Off-elec. tools	•
Release container system	•
Disposal bag 1 pcs	•
STANDARD EQUIPMENT	
FILTER ELEMENT D275X187 PET NANO M-CLASS	107400562
ITEM NO.	302002902

# ATTIX 115 & 125 - Single-phase wet & dry vacs





## Superior suction power in a strong and flexible three-motor vacuum

- Three-motor industrial performance
- Comfortable grip and robust steel chassis for durability and easy mobility
- MultiFit adapter included for high flexibility in accessory choice
- Storage of accessories

ATTIX 115 & 125 are powered by 3x1000 Watt independent "by-pass" motors and offer 100 litres containers. The two models have an integrated durable polyester star-filter with big surface area, and the manual filter shaker on the top of the machine is easy-to-use and ensures a high efficiency of the filter.





TECHNICAL DATA	ATTIX 115-01	ATTIX 125-01
Airflow rate (I/min.)	8100	8100
Vacuum (mbar/kPa)	230/23	230/23
Power Piec (W)	3 x 1000	3 x 1000
Working sound level (dB(A))	71	71
Container volume (I-max)	100	100
Mains connection (V/~/Hz/A)	230/1/50-60/16	230/1/50-60/16
Length x width x height (mm)	800x600x1555	800x600x1555
Weight (kg)	68	73
El cable (m)	9	9
Main filter type	PET Starfilter	PET Starfilter
Filter cleaning system	Manual filter shaker	Manual filter shaker
FEATURES		
Anti-static system	•	•
Release container system	•	•
Chassis on wheels with brakes	•	•
Independent motor/switches	•	•
L class filter	•	
M class filter		•
STANDARD EQUIPMENT		
ADAPTOR D70 CFM – D60 MULTIFIT	4072200392	4072200392
KIT STAR FILTER D460 L CLASS	40000338	
18 POCKET STAR FILTER KIT M CLASS		40000699
SMALL BASKET OBJECT KIT WITH NUTS BOLTS		40000892
REMOVABLE CYCLONE D460 FE COMPLETE BIG	Z5 60109	
ITEM NO.	4010500044	4010500045

# ATTIX 155 - Three-phase wet & dry vacs





## Ideal for heavy industrial vacuum cleaning

- Powerful and reliable double side channel blower needing no maintenance
- Comfortable grip and robust steel chassis for durability and easy mobility
- MultiFit adapter included for high flexibility in accessory choice
- Storage of accessories

Thanks to its high performances, ATTIX 155 is the ideal industrial three phase vacuum cleaner for the general cleaning in all kind of industry, especially when large quantity of dust have to be collected. The 100 liters steel container is ideal for collecting big amount of solid (e.g. metal chips) or liquids (e.g. oil and lubricants). The practical SitDown container system makes emptying convenient for fast and productive cleaning.





TECHNICAL DATA	ATTIX 155-01
Airflow rate (I/min.)	8600
Vacuum (mbar/kPa)	300/30
Power Piec (W)	4000
Working sound level (dB(A))	72
Container volume (I-max)	100
Mains connection (V/~/Hz/A)	400/3/50/16
Length x width x height (mm)	1130x600x1530
Weight (kg)	139
El cable (m)	9
Main filter type	PET Starfilter
Filter cleaning system	Manual filter shaker
FEATURES	
Anti-static system	•
Manometer	•
Release container system	•
Three phase side chanel blower	•
Chassis on wheels with brakes	•
L class filter	•
Plug with phase inverter	•
STANDARD EQUIPMENT	
ADAPTOR D70 CFM – D60 MULTIFIT	4072200392
KIT STAR FILTER D460 L CLASS	40000338
ITEM NO.	4030800366

# SELF-SERVICE (SB) VACUUMS – Single-phase dry vacs





# Make a good profit with our made-to-measure solution

- Single or dual operation
- High performance and easy to use
- Washable cloth filter with high filtration
- Available in oil company colours and special coin or card reader versions

These coin-operated Self-Service vacuum cleaners fulfil all special requirements for filling stations and are built for outdoor use in all kinds of weather. Available with either single or twin motor operation and a simpel cloth filter system for quick and easy maintenance.









TECHNICAL DATA	SB STATION	SB TANDEM
Airflow rate (I/min.)	4000	2 x 4000
Vacuum (mbar/kPa)	235/23.5	2 x 235/23.5
Power Pmax (W)	1700	2 x 1700
Power Piec (W)	1400	2 x 1400
Working sound level (dB(A))	75	75
Container volume (I-max)	30	2 x 30
Mains connection (V/~/Hz/A)	230/1/50-60/16	230/1/50-60/16
Length x width x height (mm)	822x546x2034	1183x546x2034
Weight (kg)	90	115
Main filter type	Needle felt	Needle felt
FEATURES		
Softstart	•	•
2 suction hoses		•
Robust steel chassis	•	•
Simple cloth filter system	•	•
Automatic hose retraction	•	•
Dual motor		•
STANDARD EQUIPMENT		
UNI. HOSE Ø50X5000MM SB VAC	64084	64084
CREVICE NOZZLE Ø50X370 PE	7102	7102
SPEC CLOTH FILTER Ø375X350 NEEDLE FELT	17069	17069
COINER EURO/TOKEN 12VDC	302000305	302000305
ITEM NO.	65481	65482



# Respiratory and skin diseases result in very high human costs

The handling of hazardous dust is a complex matter that demands innovative product development and competent engineering. As a specialist, Nilfisk offers proven, state-of-the-art solutions in every Hazard Class involving the demanding task of picking up health endangering dusts.

Working with hazardous dust demands the highest level of safety to ensure maximum health protection. Nilfisk offers Health and Safety vacuum cleaners for hazardous dust classes – L (light), M (medium), H (high), and asbestos, and for explosive dusts classified as ATEX Type 22. All our solutions meet the new pan-European standards and bear all the necessary statutory test symbols. The entire range is designed for professionals who also demand low noise operation, ergonomics, long-life and reliable performance.

SINCE 1997- EN 60335-2-69, IEC 6	50335-2-69	Hazard Types	disposal
Dust classe / Zone	Max. permeability		
L	1%	Removes 99% of:  • Dusts with OEL values > 1mg/m³	-
М	0.1%	Removes 99.9% of:  Dusts with OEL values > 0.1mg/m³ Wood dust	Low dust
Н	0.005%	Removes 99.995% of:  Dusts with OEL values  Carcinogenic dusts  Dusts with germs or bacteria	Dust free
Asbestos requirement	as H	Asbestos dust	
Explosive dusts (ATEX Zone 22)	Type 22 - As Dust Class L, M or H, with additional requirements	Dusts of dust explosion classes St1, St2 and St3 in ATEX Zone 22 (previously zone 11)	Basic machine for ATEX Zone 22 with test M or H



These vacuum cleaners permit picking up dusts from dust class L. These include dusts with OEL values > 1 mg/m<sup>3</sup>.



Asbestos is a group of naturally-occurring inorganic crystalline silicates which are found in the form of fibres. When subjected to mechanical loads these fibres can split, producing ever thinner fibres, which can consequently be deposited in the lungs. Asbestos is not used anymore, but a lot of materials and buildings that contain asbestos have to be renovated. Asbestos dusts are only permitted to be picked up with vacuum cleaners conforming to dust



These vacuum cleaners permit picking up dusts from dust classes L and M. These include all healthendangering, non-carcinogenic dusts with OEL values > 0.1 mg/m³ and hardwood dusts.



These vacuum cleaners permit picking up dusts from dust classes L, M and H. These include all healthendangering dusts with OEL values, all carcinogenic dusts and dusts contaminated with germs and bacteria.



These vacuum cleaners are approved to pick up explosive/ flammable dust in ATEX Zone 22 as well as dust from dust classes L, M or H. Furthermore these vacuum cleaners are approved to be used as dust extractors.

# ATEX ZONE 22 - Beware of explosive dust



With regard to Health and Safety vacuum cleaners, diseases are not the only danger. It is well-known that cotton or paper can burn, but also other materials such as flour or even metals can ignite. The presence of oxygen and an ignition source with sufficient energy and a flammable substance (gas, liquid or solid) are factors which can provoke an explosion. The finer the dust, the higher the risk of explosion!



With the ATEX directive 94/9/EC that came into force in July 2003, the removal and separation of explosive materials has become an international regulation. Many types of dust which are potentially explosive are classified as an ATEX (ATmosphere EXplosive) application and equipment must meet additional and very special requirements.

Nilfisk offers a range of safety vacuum cleaners to pick up explosive dust and separate it from the surrounding air. If dusts are to be vacuumed which are both explosive and hazardous, the vacuum must meet the requirements for both explosive and hazardous dust applications.

#### Additional test certificates and third party approvals

ATEX Directive 94/9/EC puts the burden on the manufacturer to ensure that products supplied for use in explosive atmospheres are ATEX compliant. This means that for a Health and Safety vacuum designed for use in an explosive at mosphere, the machine must be ATEX compliant with reference to the particular working environment. All Nilfisk TYPE 22 vacuum cleaners are ATEX compliant in ZONE 22, and this range of vacuum cleaners has passed a wide range of technical test requirements and third party approvals.

In addition to the normal requirements for a certified Health and Safety vacuum cleaner, some of the requirements to be met are listed below:

- Electric working materials must correspond to the regulations of the VDE 0165 "Setup of electrical equipment in explosive areas", for example EC system drives (free from sources of ignition).
- The machine must correspond to protection class IP 54 at least.
- Working materials must be marked with the occurring surface temperatures during constant use when these temperatures exceed 80°C. In addition, surface temperature must not exceed 135°C.
- Electric motors must be protected against short circuit, overheating due to overload or phase dropout.
- Air flow out of the vacuum must be directed in such a way that settled dust cannot be whirled up exhaust speed max. 1 m/s at 50 mm above the floor.
- Conductive machine parts (including attachments such as the suction hose and hand tube) must be electrostatically earthed.
- Special coupling is to be used which secures the earthing and makes confusion with non-conductive attachment parts impossible
- Earthing resistance must not be higher than 1 MQ.
- Container casing must be made of very non-flammable material.
- Vacuums should be clearly marked with a warning label stating "approved for use with flammable dusts in ZONE 22".
- The vacuum should also be marked with L-, M- or H-Class, depending on which requirements apply.

Nilfisk single-phase TYPE 22 vacuum cleaners for ATEX ZONE 22 are tested and certified with the following classification: (Ex) II 3D Ex tD A22 T 135 °C IP54

## ATTIX 33 M-H – Singlephase for hazardous dusts





## Powerful and safe dust extractor for hazardous dust

- InfiniClean<sup>™</sup> Automatic filter cleaning system with minimized performance loss
- PTFE long-life filter with non-stick membrane and minimum 99.9% filtration efficiency
- Push&Clean™ Semi-automatic filter cleaning system on selected models.
- Dust class M and H certification including Asbestos
- Unique dual filter solution available for H-class/ HEPA - including 3-stage filtration
- Flow sensor with combined acoustic and LED warning
- 30 liter container with steel castors and robust bumper.
- MultiFit accessory system for the ultimate in task flexibility
- Flexible rubber straps, tool box storage and optional trolley handle for convenient storage and transport
- Optional motor cooling filter, exhaust air collector and Long-Life filter bag

The ATTIX 33 M/H dust extractor series sets a standard for design and feature level of the Nilfisk wet & dry vacuum portfolio. With innovative filtration system, improved performance, robust design and dust class M/H certification, this range represents a superior solution for professional customers looking for a reliable machine to protect workers health and safety. ATTIX 33 M/H comes with more suction power, sealed dust system, automatic filter cleaning and several other user benefits - designed to meet the tough requirements in building & constructions and other industries when picking up hazardous dust.









TECHNICAL DATA	ATTIX 33-2H IC	ATTIX 33-2H PC	ATTIX 33-2M IC	ATTIX 33-2M PC
Airflow rate (I/min.)	4500	4500	4500	4500
Vacuum (mbar/kPa)	250/25	250/25	250/25	250/25
Power Pmax (W)	1400	1400	1400	1400
Power Piec (W)	1200	1200	1200	1200
Working sound level (dB(A))	60	60	60	60
Container volume (I-max)	30	30	30	30
Mains connection (V/~/Hz/A)	230/1/50-60/16	230/1/50-60/16	230/1/50-60/16	230/1/50-60/16
Length x width x height (mm)	565x385x520	565x385x520	565x385x520	565x385x520
Weight (kg)	14.5	14.5	14.5	14.5
El cable (m)	7.5	7.5	7.5	7.5
Main filter type	PTFE/Cellulose H-class	PTFE/Cellulose H-class	PTFE M-class	PTFE M-class
Filter cleaning system	InfiniClean	Push&Clean	InfiniClean	Push&Clean
FEATURES				
Softstart	•	•	•	•
Dual filter system	•	•		
Anti-static system	•	•	•	•
Automatic On/Off-elec. tools	•	•	•	•
Disposal bag 1 pcs			•	
Fleece filter bag 1 pcs			•	•
Safety filter bag 1 pcs	•	•		
STANDARD EQUIPMENT				
HOSE Ø36X4000 MM AS RED	107413544	107413544		
CURVED HAND TUBE Ø36MM SS	46691	46691	46691	46691
EXTENSION TUBE Ø36 2X505MM SS	107408074	107408074	107408074	107408074
TOOL ADAPTER D27 QUICKSYSTEM	302000535	302000535	302000535	302000535
FLOOR NOZZLE Ø36X300MM	302002331	302002331		302002331
FLOOR NOZZLE Ø36X360MM WET/DRY			60356	
CREVICE NOZZLE D36X200	29541	29541	29541	29541
HOSE Ø32X4000MM AS RED			107413543	107413543
FILTER ELEMENT Ø140X75 H-CLASS/HEPA	107413555	107413555		
FLAT FILTER PTFE M-CLASS 1 PCS	107413540	107413540	107413540	107413540
FLEXIBLE STRAP SET 2 PCS	107413553	107413553	107413553	107413553
ITEM NO.	107412184	107412183	107412180	107412179

## ATTIX 44 M-H – Singlephase for hazardous dusts





#### Powerful and large capacity dust extractor for hazardous dust

- InfiniClean™ Automatic filter cleaning system with minimized performance loss
- PTFE long-life filter with non-stick membrane and minimum 99.9% filtration efficiency
- Push&Clean™ Semi-automatic filter cleaning system on selected models.
- Dust class M and H certification including Asbestos
- Unique dual filter solution available for H-class/ HEPA - including 3-stage filtration
- Flow sensor with combined acoustic and LED warning
- 42 liter container with steel castors and robust bumper.
- MultiFit accessory system for the ultimate in task flexibility
- Flexible rubber straps, tool box storage and optional trolley handle for convenient storage and transport
- Optional motor cooling filter, exhaust air collector and Long-Life filter bag

The ATTIX 44 M/H dust extractor series sets a standard for design and feature level of the Nilfisk wet & dry vacuum portfolio. With innovative filtration system, improved performance, robust design and dust class M/H certification, this range represents a superior solution for professional customers looking for a reliable machine with large capacity to protect workers health and safety. ATTIX 44 M/H comes with more suction power, sealed dust system, automatic filter cleaning and several other user benefits - designed to meet the tough requirements in building & constructions and other industries when picking up bigger amounts of hazardous dust.





TECHNICAL DATA	ATTIX 44-2H IC	ATTIX 44-2M IC
Airflow rate (I/min.)	4500	4500
Vacuum (mbar/kPa)	250/25	250/25
Power Pmax (W)	1400	1400
Power Piec (W)	1200	1200
Working sound level (dB(A))	60	60
Container volume (I-max)	42	42
Mains connection (V/~/Hz/A)	230/1/50-60/16	230/1/50-60/16
Length x width x height (mm)	565x385x605	565x385x605
Weight (kg)	16	16
El cable (m)	7.5	7.5
Main filter type	PTFE/Cellulose H-class	PTPE M-class
Filter cleaning system	InfiniClean	InfiniClean
FEATURES		
Softstart	•	•
Dual filter system	•	
Anti-static system	•	•
Automatic On/Off-elec. tools	•	•
Disposal bag 1 pcs		•
Fleece filter bag 1 pcs		•
Safety filter bag 1 pcs	•	
STANDARD EQUIPMENT		
HOSE Ø36X4000 MM AS RED	107413544	
CURVED HAND TUBE Ø36MM SS	46691	46691
EXTENSION TUBE Ø36 2X505MM SS	107408074	107408074
TOOL ADAPTER D27 QUICKSYSTEM	302000535	302000535
FLOOR NOZZLE Ø36X360MM WET/DRY		60356
FLOOR NOZZLE D36X400MM W/D	302003666	
CREVICE NOZZLE D36X200	29541	29541
HOSE Ø32X4000MM AS RED		107413543
FILTER ELEMENT Ø140X75 H-CLASS/HEPA	107413555	
FLAT FILTER PTFE M-CLASS 1 PCS	107413540	107413540
FLEXIBLE STRAP SET 2 PCS	107413553	107413553
ITEM NO.	107412186	107412182

## ATTIX 7 - M-CLASS - Industrial health/safety wet & dry vacs





# For the professionals that demand low noise, ergonomics, long-life and reliable performance

- Approved for work with M-Class hazardous dust
- Low working sound level SilentPower high performance that is seen, but not heard
- MultiFit accessory system for the ultimate in task flexibility
- Washable PET fleece filter with Minimum 99.9% filtration efficiency
- Accessory storage and tool deposit

If working in applications with M-Class hazardous dust, our series of M-class certified vacuum cleaners are the perfect solution. Choose from different container sizes and other features which enhance your working efficiency like filter cleaning system, automatic start/ stop for power tools and AntiStatic hose system. The build-in FlowSensor and acoustic warning signal monitors air speed in the suction hose to make sure that is does go below the minimum 20 m/s. A safe and easy-to-use solution for demanding applications.



TECHNICAL DATA	ATTIX 761-2M XC
Airflow rate (I/min.)	3600
Vacuum (mbar/kPa)	230/23
Power Pmax (W)	1500
Power Piec (W)	1200
Working sound level (dB(A))	57
Container volume (I-max)	70
Mains connection (V/~/Hz/A)	230/1/50-60/16
Length x width x height (mm)	605x580x970
Weight (kg)	27
El cable (m)	7.5
Main filter type	PET Nano M-class
Filter cleaning system	XtremeClean
FEATURES	
Softstart	•
Anti-static system	•
Motor speed control	•
Stainless steel container	•
Automatic On/Off-elec. tools	•
Disposal bag 1 pcs	•
Fleece filter bag 1 pcs	•
STANDARD EQUIPMENT	
SUCTION BRUSH D36 BLACK	302002509
HOSE D27X3500 AS WITH TOOL ADAPTER	107406091
TOOL ADAPTER D27/36-24 AS	107404520
FILTER ELEMENT D275X187 PET NANO M-CLASS	107400562
ITEM NO.	302001535

# H-CLASS – Industrial health/safety wet & dry vacs





#### When you don't want to compromise your working safety

- Approved for work with H-Class hazadous dust and asbestos
- Certified H-Class filter with 99.995 99.999% filtration efficiency
- Low working sound level SilentPower high performance that is seen, but not heard
- MultiFit accessory system for the ultimate in task flexibility
- · Accessory storage and tool deposit

If working in applications with H-Class hazardous dust or asbestos, safe dust handling is a key parameter. Our series of certified H-class vacuum cleaners offers a convenient and easy-to-use solution with features which enhance safe working.

Choose from different container sizes and features like safety filter bag system, automatic start/stop for power tools and AntiStatic hose system. The build-in FlowSensor and acoustic warning signal monitors air speed in the suction hose to make sure that is does go below the minimum 20 m/s. A safe and easy-to-use solution for demanding applications.









TECHNICAL DATA	ATTIX 30-0H	ATTIX 30-0H PC	ATTIX 50-0H PC	ATTIX 751-0H
Airflow rate (I/min.)	3200	3700	3700	3100
Vacuum (mbar/kPa)	230/23	250/25	250/25	230/23
Power Pmax (W)	1300	1500	1500	1200
Power Piec (W)	1000	1200	1200	1000
Working sound level (dB(A))	59	59	59	57
Container volume (I-max)	30	30	47	70
Mains connection (V/~/Hz/A)	230/1/50-60/16	230/1/50-60/16	230/1/50-60/16	230/1/50-60/16
Length x width x height (mm)	450x380x595	450x380x595	450x380x750	605x580x970
Weight (kg)	10	10	11	25
El cable (m)	7.5	7.5	7.5	7.5
Main filter type	H-class	H-class	H-class	H-class
Filter cleaning system		Push&Clean	Push&Clean	
FEATURES				
Softstart	•	•	•	•
Airflow sensor	•	•	•	•
Anti-static system		•	•	•
Motor speed control				
Stainless steel container				•
Fleece filter bag 1 pcs	•			
Safety filter bag 1 pcs		•	•	•
STANDARD EQUIPMENT				
UNI. HOSE Ø36X3000MM W COUPLING EVA		46948	46948	46948
UNIV HOSE WITH HAND TUBE Ø32X3000	302000473			
CURVED HAND TUBE Ø36MM SS				46691
CURVED HAND TUBE D36MM ST/CR		302000528	302000528	
EXTEN TUBE D36 2X505MM ST/CR		302000529	302000529	
INDST.FL.NOZZ.36X400MM W/BRUS.		302003666	302003666	
BRUSH NOZZLE Ø36X230 PP/PA	6086			
CREVICE NOZZLE Ø36X300 PP	6084			
DIA. TUBE NOZZLE Ø36x190 MM GREY RUBBER		5067	5067	5067
FILTER ELEMENT Ø211X140 H-CLASS	302000658	302000658	302000658	302000658
ITEM NO.	107407546	107400405	107400407	302001519

#### ATTIX 965 H/M SD XC – Industrial health/safety wet & dry vacs





#### The most powerful vacuum for both M and H-Class hazardous dust

- Approved for both M- and H-Class hazardous dust.
- Dual motor industrial performance
- High quality stainless steel container with steel chassis
- MultiFit accessory system for the ultimate in task flexibility
- Big surface H-Class filter for high efficiency and low maintenance costs
- · Accessory storage and tool deposit

The ATTIX 965 H/M is a powerful two-motor vacuum cleaner, which is approved to be used for both M- and H-Class. Featuring XtremeClean automatic filter cleaning and stainless steel SitDown container - the perfect disposal concept for industrial use and health endangerous and carcinogenic dust.The build-in FlowSensor and acoustic warning signal monitors air speed in the suction hose to make sure that is does go below the minimum 20 m/s. A safe and easy-to-use solution for demanding applications.



TECHNICAL DATA	ATTIX 965-0H/M SD XC
Airflow rate (I/rain)	2 x 3600
Airflow rate (I/min.)	
Vacuum (mbar/kPa)	250/25
Power Pmax (W)	2 x 1500
Power Piec (W)	2 x 1200
Working sound level (dB(A))	67
Container volume (I-max)	50
Mains connection (V/~/Hz/A)	230/1/50/16
Length x width x height (mm)	615x690x990
Weight (kg)	45
El cable (m)	10
Main filter type	H-class
Filter cleaning system	XtremeClean
FEATURES	
Softstart	•
Anti-static system	•
Release container system	•
Disposal bag 1 pcs	•
Safety filter bag 1 pcs	•
STANDARD EQUIPMENT	
FILTER ELEMENT D275X187 H-CLASS	107400564
ITEM NO.	302002903



	D						1																		
		SALTIX 10	MAXXI II 35 WD	MAXXIII 55-1 WD	MAXXI II 55-2 WD	MAXXIII 75-1 WD	MAXXI II 75-2 WD	AERO 21-01 PC	AERO 21-01 PC INOX	AERO 21-21 PC	AERO 21-21 PC INOX	AERO 26-01 PC X	AERO 26-21 PC	AERO 26-2L PC	AERO 31-21 PC INOX	ATTIX 30-01	ATTIX 30-01 PC	ATTIX 30-11 PC	ATTIX 30-21 PC	ATTIX 40-01 PC INOX	ATTIX 40-21 PC INOX	ATTIX 50-01 PC	ATTIX 50-21 PC	ATTIX 50-21 PC CLEAN ROOM	
	ANIMAL CARE SET Ø27MM 4-PCS				<u>.</u>											-					_				
Mar	4-piece, 27 mm dia. connection		0	. 0	. 0	0	0	0	0	0	0	0	0	0	0	. 0	. 0	0	0	0	0	0	0	0	
<b>6</b> 6	3.5 m suction hose, universal, Ø27  Spiked currycomb, plastic, for long hair  Currycomb, plastic, for long hair  Brush currycomb, plastic, for short hair																					-			
• • • • • • • • • • • • • • • • • • • •				••••	<b></b> .		<b>.</b> '							• • • • • •							<b></b>		<b></b>		4
	HOSE SET Ø36MM 3 PCS 3-piece, 36 mm dia. connection		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	)
MAN	4 m suction hose, universal, Ø36																<u></u>					-	<u></u>		1
-	Curved hand tube, stainless steel Adapter																				<u> </u>		<u> </u>		4
•																							<u> </u>		Ĺ
•••••	CAR SET Ø36MM 3 PCS						<b></b>					• • • • • • • • • • • • • • • • • • • •		••••		• • • • • • • • • • • • • • • • • • • •			••••	• • • • • • • • • • • • • • • • • • • •					4
	3-piece, 36 mm dia. connection		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	)
	Crevice nozzle, plastic, 300 mm			•																		-			4
1	Universal nozzle, plastic, 115 mm Diagonal tube nozzle, rubber																					-			
																							<u>.</u>		
	HOME & OFFICE SET Ø36MM 5-PCS			••••	<b></b> !		<b></b> '					• • • • • • • • • • • • • • • • • • • •		• • • • • • •		• • • • • •		• • • • • • • • • • • • • • • • • • • •							4
	5-piece, 36 mm dia. connection		0	0	0	0	0	0	0	0	0	0	0	0	0	0	. 0	0	0	0	0	0	0	. 0	1
1	2 x 500 mm extension tubes, aluminium		<u></u>				4										<u> </u>					-	<u> </u>		1
14	Universal nozzle, plastic, 115 mm  Combination nozzle																						-		À
A STATE	Brush nozzle, plastic, 230 mm  Radiator brush nozzle, plastic																				-				
• • • • • • • • • • • • • • • • • • • •	TRADE AND IND. SET Ø36MM 5-PCS			• • • • • • • • • • • • • • • • • • • •			<b></b> '					• • • • • • • • • • • • • • • • • • • •		• • • • •		• • • • • •		••••		• • • • • • • • • • • • • • • • • • • •				• • • • • • • • • • • • • • • • • • • •	Ā
11	5-piece, 36 mm dia. connection		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	. 0	A
14	2 x 500 mm extension tubes, aluminium  Crevice nozzle, plastic, 300 mm																		<u>.</u>						
	Large capacity floor nozzle with brush strips, 450 mm  Replacement rubber lips, for wet vacuuming															-									À
	Flat rubber nozzle, oil and heat-resistant, 100 mm																				-				1
	WORKSHOP SET Ø36MM 6-PCS			••••		••••	!								•••••			••••		••••		••••		••••	
<u> </u>	6-piece, 36 mm dia. connection		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	À
	4 m suction hose, universal, Ø36  Curved hand tube, stainless steel			•																	_		-		À
<b>, ,</b>	2 x 500 mm extension tubes, stainless steel Professional floor nozzle, 360 mm																						<u> </u>		
	Crevice nozzle, plastic, 300 mm				<u> </u>	-	<u> </u>									-		-		-	<u> </u>	-	<u> </u>	-	À

O ATTX33-2LIC	O ATTIX 33-2LIC MOBILE	O ATTIX 44-2LIC	O ATTIX 44-2L IC MOBILE	O ATTIX 751-11	ATTIX 751-21	ATTIX 761-21 XC	ATTIX 791-21 EC	ATTIX 751-61 LIQUID VAC	1 MWF		ΟX																			
0	0	0	0	0		×	ATTIX	ATTIX 751	ATTIX 751-71 MWF	ATTIX 961-01	ATTIX 965-21 SD XC	ATTIX 115-01	ATTIX 125-01	ATTIX 145-01	ATTIX 155-01	SB STATION	SB TANDEM	ATTIX 33-2H IC	ATTIX 33-2H PC	ATTIX 33-2M IC	ATTIX 33-2M PC	ATTIX 44-2H IC	ATTIX 44-2M IC	ATTIX 761-2M XC	ATTIX 30-0H	ATTIX 30-0H PC	ATTIX 50-0H PC	АТТІХ 751-0Н	ATTIX 965-0H/M SD XC	Item no.
					0	0	0			*			•	-				0	0	0	0	0	0	0	0	0	0	0		6095
						-		-		-	-	-		-		-				-						-		-		14289
															-															6094 6092
						•		•		•		•								•			•							6093
						•				-		•					•••••••••••••••••••••••••••••••••••••••			•		• · · · · · · · · · · · · · · · · · · ·	•						<del>.</del>	
0	0	0	0	0	0	0	0	0	0	0	0	••••						0	0	0	0	0		0	0			0	0	63210
								-				•									-									03210
				•		•						•		-			•••••••••••••••••••••••••••••••••••••••			•		• · · · · · · · · · · · · · · · · · · ·	•							25537 46691
						•				*				-									•							29457
						•						•	•																	
						• • • • • •	•	• • • • •	• • • • • • • • • • • • • • • • • • • •	• • • • •	• • • • • • • • • • • • • • • • • • • •	• • • • •	• • • • •	• • • • •	• • • • • •			• • • • • •		• • • • • •	• • • • • •		• • • • • •		• • • • • •	• • • • • •		• • • • •	• • • • • • • • • • • • • • • • • • • •	
0	0	0	0	0	0	0	0	0	. 0	0	0	-		-				0	0	0	0	0	0	0	0	0	0		0	6321
						•						•		-													•			6084
				•		•		•		•		•	•	•				-		•		•	•	•		•		•		14295 5067
								-	-	•		-		-												-				
0	0	0	0	0	0	. 0	0	•		0	0	•	•	•				0	0	0	0	0	0	0	0	0	0	0	0	63212
						-						-		-												-				
_						•				•		•							•			• • • • • • • • • • • • • • • • • • • •				•				107400032 14295
				•		•		•		•		•	•	•					•	•			•			•		•		8046 6086
																														5144
						• • • • • • • • • • • • • • • • • • • •		• • • • • • • • • • • • • • • • • • • •		• • • • •	••••	••••	••••	• • • • • • • • • • • • • • • • • • • •											••••	• • • • • • • • • • • • • • • • • • • •	••••	• • • • • • • • • • • • • • • • • • • •		
0	0	0	0	0	0	0	0	0	. 0	0	0	•						0	0	0	0	0	0	0	0	0	0	0	0	63213
									-																					107408074
										•		•		•				•		•				•		•				6084 15348
						•				•		•		-								•								15352 40456
						••••	••••	• • • • •	•••••	• • • • • •	•••••	•••••		••••	• • • • • •					• • • • •	• • • • • •		•••••			• • • • •		• • • • •		
0	0	0	0	0	0	0	0	0	0	0	0							0	0	0	0	0	0	0	0	0	0		0 3	0200092
										•		•																		25537
										•		•								•		•								46691
																• · · · · · · · · · · · · · · · · · · ·			•	•		• · · · · · · · · · · · · · · · · · · ·	•			•				107408074
C		0																												

		0	.35 WD	MAXXI II 55-1 WD	MAXXI II 55-2 WD	MAXXI II 75-1 WD	MAXXI II 75-2 WD	-01 PC	AERO 21-01 PC INOX	-21 PC	AERO 21-21 PC INOX	-01 PC X	-21 PC	-2L P.C	AERO 31-21 PC INOX	1-01	1-01 PC	-11 PC	J-21 PC	ATTIX 40-01 PC INOX	ATTIX 40-21 PC INOX	J-01 PC	J-21 P.C	ATTIX 50-21 PC CLEAN ROOM	
	WORKSHOP KIT BASIC D36MM 4PCS	SALTIX 10	MAXXIII 35 WD	MAXXIII	MAXXIII	MAXXIII	MAXXIII	AERO 21-01 PC	AERO 21-	AERO 21-21 PC	AERO 21-	AERO 26-01 PC X	AERO 26-21 PC	AERO 26-2L	AERO 31-	ATTIX 30-01	ATTIX 30-01 PC	ATTIX 30-11 PC	ATTIX 30-21 PC	ATTIX 40	ATTIX 40	ATTIX 50-01	ATTIX 50-21 PC	ATTIX 50	
	WORKSHOP KIT BASIC D36MM 4PCS 4-piece, 36 mm dia. connection		0	. 0	0	. 0	0	0	0	. 0	0	. 0	0	0	0	0	0	0	0	0	0	0	0	0	
M	Curved hand tube, stainless steel  2 x 500 mm extension tubes, stainless steel  Professional floor nozzle, 400 mm								-						-										
	Crevice nozzle, plastic, 300 mm										•				-										
	WORKSHOP HOSE KIT AS SYSTEM 36 6 PCS 6 pcs.	• • • • • • • • • • • • • • • • • • • •		•••••	•••••	• • • • •						••••	•••••	•••••	••••	••••	••••• •	••••		••••			0	••••	••••
<b>&gt;</b>	Ø32x4000 mm AntiStatic Hose 3 x 350 mm Extension Tube, stainless steel 300 mm Floor Nozzle Curved hand tube, stainless steel													-		-									
	Crevice Nozzle Tool Adapter, AS	••••																		• • • • •					
2	WORKSHOP HOSE KIT SYSTEM 36 5-PCS 5 pcs.  Ø32x3500 mm Universal Hose		0	0	0	0	0	0	0		0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	2 x 500 mm Extension Tube, chrome steel 300 mm Floor Nozzle Crevice Nozzle Tool Adapter									-				-											
	WATER VACUUM SET Ø36MM 3- PCS	••••		••••		• • • • •			• • • • • •	• • • • • •	• • • • •	• • • • •			••••	••••	••••	••••		••••	••••	••••	••••	••••	
	3-piece, 36 mm dia. connection		0	0	0	. 0	0	0	0	. 0	0	. 0	0	0	0	0	0	0	0	0	0	0	0	0	
	2 x 500 mm extension tubes, stainless steel  Special floor nozzle, plastic, 400 mm  Crevice nozzle, plastic, 300 mm													-							-				
•••••	BOILER SET Ø 36MM 4-PCS	••••	••••	• • • • •	••••	• • • • •			• • • • •	• • • • •	• • • • •	• • • • •		• • • • •	••••	••••	• • • • •	• • • • •		••••			••••	••••	
	4-piece, 36 mm dia. connection	-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
1	3 m suction hose, universal, Ø36  Hand tube, stainless steel										•			-		-		•		•					
	Universal nozzle, aluminium, 150 mm  Crevice nozzle, 920 mm, crome-plated	_				-			-	-		-		-	-	-	-			-					
	INDUSTR. FLOOR SET Ø36MM 4-PCS 4-piece, 36 mm dia. connection	••••				• • • •			0		0	••••				••••	••••	••••		• • • •				••••	
5	→ 4 m suction hose, oil-resistant, Ø36													-	-									•	
	Curved hand tube, stainless steel 2 x 500 mm extension tubes, stainless steel									-					-	•	-	•		•					
	Large capacity floor nozzle with rubber lips, 450 mm						•											-					·		L

ATTIX 33-01 IC	ATTIX 33-2LIC	ATTIX 33-2L IC MOBILE	ATTIX 44-2L IC	ATTIX 44-2L IC MOBILE	ATTIX 751-11	ATTIX 751-21	ATTIX 761-21 XC	ATTIX 791-21 EC	ATTIX 751-61 LIQUID VAC	ATTIX 751-71 MWF	ATTIX 961-01	ATTIX 965-21 SD XC	ATTIX 115-01	ATTIX 125-01	ATTIX 145-01	ATTIX 155-01	SB STATION	SB TANDEM	ATTIX 33-2H IC	ATTIX 33-2H PC	ATTIX 33-2M IC	ATTIX 33-2M PC	ATTIX 44-2H IC	ATTIX 44-2M IC	ATTIX 761-2M XC	ATTIX 30-0H	ATTIX 30-0H PC	ATTIX 50-0H PC	ATTIX 751-0H	ATTIX 965-0H/M SD XC	Item no.
0	0	0	0	0	0	0	0	0	0	0	0	0		•	•				0	0	0	0	0	0	0	0	0	0	0	0	107401367
																															302000528 302000529 302003666 6084
· • · · · ·	• • • • • • • • • • • • • • • • • • • •		• • • • • •			• • • • • •			• • • • •	• • • • • •									· · · · ·								• • • • •			• • • • • • • • •	• • • • • • • • • • • • • • • • • • • •
0	0	0	0	0	0	0	0	0	0	0	0	0							0	0	0	0	0	0	0	0	0	0	0	0	107413546 107413543 107416995 302002331 46691 29541
	••••		••••						• • • • •	• • • • •					• • • • •												••••				302000535
0	0	0	0	0	0	0	0	0	0	0	0	0							0	0	0	0	0	0	0	0	0	0	0	0	107413545 107409976 302000529 107402706 29541 107409977
0	0	0	0	0	0	0	0	0	0	0	0	0		•					0	0	0	0	0	0	0	0	0	0	0	0	7727
																															107408074 5149 6084
0	0	0	0	0	0	0	0	0			0	0							0	0	0	0	0	0	0	0	0	0	0	0	60430
																															46948 46691 5145 17836
•••••	••••		••••						••••											••••		• · · · •			••••		••••				•••••
0	0		0	0	0	0	0	0	0	0	0	0		•					0	0	0	0	0	0	0	0	0	0	0	0	63214 61779 46691

		SALTIX 10	MAXXIII 35 WD	MAXXI II 55-1 WD	MAXXI II 55-2 WD	MAXXI II 75-1 WD	MAXXI II 75-2 WD	AERO 21-01 PC	AERO 21-01 PC INOX	AERO 21-21 PC	AERO 21-21 PC INOX	AERO 26-01 PC X	AERO 26-21 PC	AERO 26-21 PC	AERO 31-21 PC INOX	ATTIX 30-01	ATTIX 30-01 PC	ATTIX 30-11 PC	ATTIX 30-21 PC	ATTIX 40-01 PC INOX	ATTIX 40-21 PC INOX	ATTIX 50-01 PC	ATTIX 50-21 PC	ATTIX 50-21 PC CLEAN ROOM
	OVEN CLEANING SET 3 PCS			<u> </u>					_		_				_					_		-		
1	3-piece, 38 mm dia. connection		0	. 0	0	0	0									. 0	. 0	0	. 0	0	0	. 0	0	0
1	4 m suction hose, heat resistant, Ø36 2.5 m anodised aluminium extension tube Oven nozzle "XL", 400 mm																							
					4																			
•••••	PIPE CLEANING SET Ø 38MM 4-PCS	•		• • • • • • • • • • • • • • • • • • • •	<u> </u>	• • • • • •				• • • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • • •		••••	• • • • •			••••	<u></u>	••••			<u></u>	
_ /	4-piece, 38 mm dia. connection		0	0	0	0	0		-		-				-	0	0	0	0	0	0	0	0	0
5	4 m suction hose, universal, Ø38-Ø36 2.5 m extension tube, anodised aluminium																							
	Pipe deaning nozzles for 70-120 mm dia. pipes Pipe deaning nozzle for 120-220 mm dia. pipes																							
•••••	INDUSTRIAL SET 38				<b></b> .							• • • • • • • • • • • • • • • • • • • •							<b></b>					
	5-piece, 38 mm dia. connection		0	0	0	0	0							_	-	0	0	0	0	0	0	0	0	0
1	4 m suction hose, universal, Ø38				4				•															
	2 x 500 mm extension tubes, stainless steel				1																			
•	Curved hand tube, stainless steel				4																			
	Industrial adjustable floor nozzle, 400 mm  Crevice nozzle, plastic, 300 mm		<u> </u>		4		1										<u> </u>				<u> </u>		<u> </u>	
•••••	•		<b></b>		4									• • • • • • • • • • • • • • • • • • • •			<b>.</b>						4	
-	INDUSTR. FLOOR SET Ø50MM 6-PCS				4		4									_			4					
	6-piece, 50 mm dia. connection		0	. 0	. 0	0	. 0									. 0	. 0	0	. 0	0	. 0	. 0	. 0	0
1	4 m suction hose, universal, Ø50																							
	Curved extenstion tube, anodised aluminium		<u> </u>											-				_					<u> </u>	
	Replacement rubber lips				<u> </u>									_	_		<u>.</u>							
	Crevice nozzle, special plastic, 350 mm	_			4																			
	Coarse dirt nozzle, aluminium, 200 mm STANDARD VAC SET Ø50MM 3-PCS			• • • • •	4	••••				• • • • • •				• • • • •				• • • •					ļ!	
	3-piece, 50 mm dia. connection		0	0	0	. 0	0									0	0	0	0	0	0	0	0	0
	4 m suction hose, universal, Ø50																							
	Diagonal tube nozzle, rubber, 250 mm		ł		<b>I</b>		1		ł	-			<u> </u>		ļ		ł		1		<i>l</i>		İ	
1	Crevice nozzle, special plastic, 350 mm																							
	CHIP SET Ø50MM 2-PCS		<b></b>		4		<b>.</b>																ļ'	
1	2-piece, 50 mm dia. connection		0	0	0	0	0									0	0	0	0	0	0	0	0	0
	the invitation has a 250				4		<u> </u>																<u>.</u>	
	4 m heat resistant suction hose, Ø50  Diagonal tube nozzle, rubber, 250 mm					_	<u> </u>					•	<u>.</u>				<u> </u>							
	-				4		1							-			t	-	1		l		1	

ATTIX 33-01 IC	ATTIX 33-2L IC	ATTIX 33-2L IC MOBILE	ATTIX 44-2L IC	ATTIX 44-2L IC MOBILE	ATTIX 751-11	ATTIX 751-21	ATTIX 761-21 XC	ATTIX 791-21 EC	ATTIX 751-61 LIQUID VAC	ATTIX 751-71 MWF	ATTIX 961-01	ATTIX 965-21 SD XC	ATTIX 115-01	ATTIX 125-01	ATTIX 145-01	ATTIX 155-01	SB STATION	SB TANDEM	АТТІХ 33-2Н ІС	ATTIX 33-2H PC	ATTIX 33-2M IC	ATTIX 33-2M PC	ATTIX 44-2H IC	ATTIX 44-2M IC	ATTIX 761-2M XC	ATTIX 30-0H	ATTIX 30-0H PC	ATTIX 50-0H PC	ATTIX 751-0H	ATTIX 965-0H/M SD XC	Item no.
. 0	0	0	. 0	0	0	. 0	. 0	0	-	<u>.</u>	0	0							0	0	0	0	0	0	0	. 0	. 0	0	0	0	1434
	-	-	-	-	-	-	-		-		-				-		-	-	-		-				-		-	-	-		61779
			-		-										-				_						-						4669 10740807
			•							•							•		•	•											15349
				•			•	-		•	•	<b>-</b>			-	·	•	•	-	•					-						
	• • • •	0	0	0		0		0	•••••	••••	0	0		•••••	• • • • •	• • • • •			0			0	0			0	0	0		0	6321
															•		•														0321
				•				-			•						•	•	•											•	1536 1534
					-				-				-		-				-		-		-		-		-		-		796
•	•			•	•		•			•					•				•	•	•		-	•	•		•	•			805
• • • • •	•		• • • • •	• • • • •	• • • • •		• • • • •	• • • • •	• • • • •	• • • • •	• • • • •	• • • • •	• • • • •		• • • • •	• • • • •	• • • • •	• • • • •	• • • • •	• • • • • •	• • • • •		• • • • •		•		• • • • •	• • • • •	• • • • •	• · · · · • · · · · · · · · · · · · · ·	• • • • • • •
0	0	0	. 0	0	0	0	0	0	0	0	0	0	-			-			0	0	0	0	0	0	0	0	0	0	0	0 3	0200288
			•	•					-4.	•	•	•	•			•	•	<b></b>	•	•	***************************************		•							•	30200279 10740247
			•														•		•		***************************************	•	•	•						•	30200288
															-				-						-					•	30200279 30200289
• • • • •	• • • • •		• • • • •	• • • • •	• • • • •	• • • • • •	• • • • •	• • • • •	• • • • •		• • • • •	• • • • • •	• • • • •	• • • • •	• • • • •	• • • • • •	• • • • •	• • • • •	• • • • •		• • • • •		• • • • •	••••	• • • • •	• • • • • • • • • • • • • • • • • • • •	• • • • •		• • • • •	• •	• • • • • •
. 0	0	0	. 0	0	0	0	0	0	0	0	0	0	0	0	0	0	•		•	•	•		•	•	0		•		0	0	6321
-		-			-	-			-						-			-	-		-				-		-		-		1535
	_								_										_												1533 1534
																		-													1534
																															710 4110
		0	0	0		••••								0	0				••••						0					0	608
-														J			•		•	•	•										
	_			•	-		•				•	<u>-</u>			-	·	•		-		•				-		•				1535 786
-		-	-		-			-							-			-	-		-				-						710
			•		•				-						•		•		•		•			•	•		•				
••••	• • • • • • • • • • • • • • • • • • • •		• • • • •		• • • • •		• • • • • • • • • • • • • • • • • • • •	• • • • • •	• • • • •						• • • • •		• • • • • •		• • • • •		• • • • • •				• • • • •		• • • • • • • • • • • • • • • • • • • •		• • • • •		• • • • • • •
. 0	0	0	. 0	0	0	0	0	0	0	0	0	0	0	0	0	0									. 0				0	0	6168
			•	•	•		•		•		•		•		•		•	•	•		•		•	•	•		•		•		1518
			-				•	-	-	•	•			•					-	•	*			•	-		•				786

	SALTIX 10	MAXXI II 35 WD	MAXXI II 55-1 WD	MAXXI II 55-2 WD	MAXXIII 75-1 WD	MAXXI II 75-2 WD	AERO 21-01 PC	AERO 21-01 PC INOX	AERO 21-21 PC	AERO 21-21 PC INOX	AERO 26-01 PC X	AERO 26-21 PC	AERO 26-2L PC	AERO 31-21 PC INOX	ATTIX 30-01	ATTIX 30-01 PC	ATTIX 30-11 PC	ATTIX 30-21 PC	ATTIX 40-01 PC INOX	ATTIX 40-21 PC INOX	ATTIX 50-01 PC	ATTIX 50-21 PC	ATTIX 50-21 PC CLEAN ROOM	ATTIX 50:21 PC EC
BUS SET Ø 50MM 6-PCS																								
6-piece, 50 mm dia. connection																								
					•				-					_			-		•	-				
16 m suction hose, universal, Ø50																			-					
2 x 560 mm extension tubes, plastic	_																						_	_
Crevice nozzle, special plastic, 350 mm																								
Coarse dirt nozzle, aluminium, 200 mm																								
Suction brush, plastic	•	-							•								•		•	-				
Hose holder																								-



ATTIX 33-01 IC	ATTIX 33-2LIC	ATTIX 33-2L IC MOBILE	ATTIX 44-2L IC	ATTIX 44-2L IC MOBILE	ATTIX 751-11	ATTIX 751-21	ATTIX 761-21 XC	ATTIX 791-21 EC	ATTIX 751-61 LIQUID VAC	ATTIX 751-71 MWF	ATTIX 961-01	ATTIX 965-21 SD XC	ATTIX 115-01	ATTIX 125-01	ATTIX 145-01	ATTIX 155-01	SB STATION	SB TAND EM	ATTIX 33-2H IC	ATTIX 33-2H PC	ATTIX 33-2M IC	ATTIX 33-2M PC	ATTIX 44-2H IC	ATTIX 44-2M IC	ATTIX 761-2M XC	ATTIX 30-0H	ATTIX 30-0H PC	ATTIX 50-0H PC	ATTIX 751-0H	ATTIX 965-0H/M SD XC	Item no.	
	•		•		0	0	0	0			•										•		•		0				0		63217	
					+				-			-	-		-						•	-										
	•		•		•	•	•		•	•	•	•	•	•	•	•	• · · · · · · · · · · · · · · · · · · ·		•		•	•	•		•	•	•		•		E4E2	
					•					•		•	•					<u>.</u>		<b>-</b>		•		•				<u>.</u>			5152 7102	
	•				•						•		•		•	•					•		•		•		•		•		41100	
	•		•	•						•	•	•	•	•				•	•	•	*	•	•	•	•			•	•		40458	
								_																							65081	

		SALTIX 10	MAXXI II 35 WD	MAXXI II 55-1 WD	MAXXI II 55-2 WD	MAXXI II 75-1 WD	MAXXI II 75-2 WD	AERO 21-01 PC	AERO 21-01 PC INOX	AERO 21-21 PC	AERO 21-21 PC INOX	AERO 26-01 PC X	AERO 26-21 PC	AERO 26-2L PC	AERO 31-21 PC INOX	ATTIX 30-01	ATTIX 30-01 PC	ATTIX 30-11 PC	ATTIX 30-21 PC	ATTIX 40-01 PC INOX	ATTIX 40-21 PC INOX	ATTIX 50-01 PC	ATTIX 50-21 PC	ATTIX 50-21 PC CLEAN ROOM
	System 50 Hose Vacuum Cleaner UNIV HOSE Ø 50X1750MM		0	. 0	. 0	. 0	0		-			-				0	0	. 0	0	0	. 0	0	0	0
	UNI. HOSE Ø50X4000MM EVA/ABS		0	. 0	0		0							-		0	0		0		0		0	
)				-								-						-						-
	UNI. HOSE Ø50X5000MM SB VAC		0	. 0	. 0	. 0	. 0					-		-		-						-		-
	HOSE UNIVERSAL Ø50 EVA PER METRE		0	0	0	0	0					-												-
>	AS HOSED50X4000MM		0	0	0	0	0					-				0	0	0	0	0	0	0	0	0
	HOSE OIL RESISTANT D50X40		0	0	0	. 0	0		-			-				0	0	0	0	0	0	0	. 0	0
	HOSE HEAT RESIST. Ø 50X4000MM		0		0				-			-		-					0		0	0		0
•			_	-					-		•	-				_								
9	METAL HOSE Ø50X4000MM		0	. 0	. 0	. 0	0					-		-		0	0	. 0	0	0	0	0	0	0
	CHIPS HOSE Ø50X4000MM		0	0	0	0	0		-			-	-	-		0	0	0	0	0	0	0	0	0
	HOSE CONNECTION Ø50 PVC		0	0	0	0	0		-			-				-	-	-						_
	HOSE SLEEVE Ø50/50 ABS		0	0	. 0	0	0					-		-			-	-			-			-
	System 50 Tube	• • • • • •	••••	• • • • •	••••	• • • • •	• • • • •		• • • • •	• • • •	• • • • •	••••	• • • • •	• • • •	• • • • •	• • • • •	• • • • •	••••	• • • • •	• • • • •	• • • • •	••••	• • • • •	••••
0	CURVED HAND TUBE Ø50-36MM		0	0	0	0	0		-			-	-			0	0	0	0	0	0	0	0	0
	CURVED ALU EXT.TUBE Ø50X1000		0	0	0	0	0		-			-				0	0	0	0	0	0	0	0	0
	SUCTION TUBE Ø50 2X525MM PVC		0	0	0	. 0	0					-	-	-	-	0	0	0	0	0	0	0	0	0
-	ELBOW 90 Ø 50MM		0	0	0		0	0	0	0	0		0		0	. 0		. 0	0	0	0	0	0	0
				-								-					-	-					-	
	ADAPTOR D70 CFM – D60 MULTIFIT				•	-			•			-		-				-						-
	ADAPTER Ø50-36MMX125		0	0	0	0	0									0	0	0	0	0	0	0	0	0
	System 50 Vac Floor Nozzle FLOOR NOZZLE Ø50X350 PVC	• • • • • • • • • • • • • • • • • • • •		• • • •		• • • •				• • • • •	••••	••••		• • • • •						• · · · · · · · · · · · · · · · · · · ·				
	. COSTRUCTED DOORS IN THE										•			-										

<sup>●</sup> Standard accessories
O Supplementary accessories
□ Supplementary and mountable accessories

Item no.	ATTIX 965-0H/M SD XC	ATTIX 761-2M XC	ATTIX 44-2M IC	ATTIX 44-2H IC	ATTIX 33-2M PC	ATTIX 33-2M IC	ATTIX 33-2H PC	ATTIX 33-2H IC	SB TANDEM	SB STATION	ATTIX 155-01	ATTIX 145-01	ATTIX 125-01	ATTIX 115-01	ATTIX 965-21 SD XC	ATTIX 961-01	ATTIX 751-71 MWF	ATTIX 751-61 LIQUID VAC	ATTIX 791-21 EC	ATTIX 761-21 XC	ATTIX 751-21	ATTIX 751-11	ATTIX 44-2L IC MOBILE	ATTIX 44-2L IC	ATTIX 33-2LIC MOBILE	ATTIX 33-2L IC	ATTIX 33-01 IC	ATTIX 50-21 PC EC
19930	0	0									0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
15358	0	0		-							0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
64084	-			-					•	•	-		-		-	-			-			-	-	-	-			-
11984				-							-	•	-		-				-			-	-	-	-			-
15815		0			•						. 0	. 0	. 0	0	. 0	. 0	0	0	. 0	0	. 0	. 0	. 0	0	. 0	0	. 0	. 0
6468		0		-									0	0				0	0	0		. 0		0	. 0	0	0	
11061		0												0			0	0		0	0	0				0	0	
15013		0		-									0	0	0		0	0		0	0					0	0	
	-									-	-		-		-	-								-				-
15182	0	0		-							0		0	0	0		0	0		0	0	0		0	. 0	0	0	. 0
6330	-		-								-		-						-				-	-				-
15101		•		•						•		•			-								•		•		•	
15341	0	0			-				0	0	-		-		0	0	0	0	0	0	0		0	0	0	0	0	0
15335	0	0								-	0	0	0	0	0	0	0	0	0	0	0	0	. 0	0	. 0	0	0	. 0
5152		0										. 0	. 0	0	. 0	. 0	0	0	. 0	0	0	0	. 0	. 0	. 0	0	0	. 0
5089	0	0	0	0	0	0	0	0									0	0	0	0	0	0	. 0	0	. 0	0	0	. 0
4072200392	-													•					-				•		•			•
40452		0	0	. 0					0	. 0					. 0	0	0	0		0		. 0	. 0	0	. 0	. 0	. 0	. 0
			• • • • • •	•••••						•••••	• • • • • •	•••••	•	•••••	•••••	•••••			•	•••••		•••••	• • • • • • • • • • • • • • • • • • • •	•••••	•••••			•••••
6077	0	0													0	0	0	0	0	0	0	0	0	0	. 0	0	0	0

<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

	SALTIX 10 MAXXI II 35 WD	MAXXI II 55-1 WD	MAXXIII 55-2 WD	MAXXI II 75-1 WD	MAXXI II 75-2 WD	AERO 21-01 PC	AERO 21-01 PC INOX	AERO 21-21 PC	AERO 21-21 PC INOX	AERO 26-01 PC X	AERO 26-21 PC	AERO 26-2L PC	AERO 31-21 PC INOX	ATTIX 30-01	ATTIX 30-01 PC	ATTIX 30-11 PC	ATTIX 30-21 PC	ATTIX 40-01 PC INOX	ATTIX 40-21 PC INOX	ATTIX 50-01 PC	ATTIX 50-21 PC	ATTIX 50-21 PC CLEAN BOOM
System 50 Vac Floor Nozzle FLOOR NOZZLE Ø50x450 WET/DRY ADJ	0	0	0	0	0					-				0	0	0	0	0	0	0	0	0
FLOOR NOZZLE ALU. 500XØ50MM DRY	0	0	0	0	0		-			-				. 0	0	0	0	0	0	0	0	0
FIXED FLOOR NOZZLE Ø50X600MM ALU																						
NOZZLE ALU. 500XØ50MM WET	0	0	0	0	0					-				0	0	0	0	0	0	0	0	0
System 50 Brush/Universal Nozzle COARSE DIRT NOZZLE Ø50X175 PP	0	0	0	0	0							••••		0	0	0	0	• • • • • • • • • • • • • • • • • • • •	0	0	0	0
COARSE DIRT NOZZLE Ø50X200MM ALU	0	0	0	0	0					-				0	0	0	0	0	0	0	0	0
ROUND BRUSH NOZZLE Ø50MM	0	0	0	0	0		-			-				. 0	0	0	0	0	0	0	0	0
Sustain En Cravica (Capa Nazala				• • • • •						• • • • •				• • • • •				• • • • •	• • • • •	••••		
System 50 Crevice/Cone Nozzle  CREVICE NOZZLE Ø50X370 PE	0	0	0	0	0					-				. 0	0	0	0	. 0	0	0	0	0
DIAGONAL TUBE NOZZLE Ø50 RUBBER	0	0	0	0	0					-				. 0	0	0	. 0	. 0	0	0	0	c
ROUND NOZZLE Ø50MM RUBBER	0	0	0	0	0					-				0	0	0	0	0	0	0	0	c
FLAT NOZZLE RUBBER Ø 50MM	0	0	0	0	0					_				0	0	0	0	0	0	0	0	c
System 38 Hose Vacuum Cleaner UNIV HOSE Ø36-38X4000MM EVA		0		0						-		• • • •		0			0	•		0	0	
UNI. SUCTION HOSE Ø38X4000MM EVA	0	0	0	0	0									0	0	0	0	0	0	0	0	С
HOSE D38X5000 AS	0	0	0	0	0									0	0	0	0	0	0	0	0	o
HOSE HEAT RES. 36X4000 FOR	0	0	0	0	0									0	0	0	0	0	0	0	0	c
System 38 Tube  CURVED HAND TUBE D38 MM SS	0	0	0	0	0							••••		0	0	0	0	0	0	0	0	
EXTENSION TUBES R38 2X500 KIT	0	0	0	0	0					-			•	0	0	0	0	0	0	0	0	c

<sup>●</sup> Standard accessories
O Supplementary accessories
□ Supplementary and mountable accessories

ATTIX 965-0H/M SD XC ATTIX 966-0H/M SD AC  Item no.	ATTIX 761-2M XC ATTIX 965-0H/M SD XC	ATTIX 44-2M IC	71 117-44-71 17	ATTIX 44-2H IC	ATTIX 33-2M PC	ATTIX 33-2M IC	ATTIX 33-2H PC	ATTIX 33-2H IC	SB TANDEM	SB STATION	ATTIX 155-01	ATTIX 145-01	ATTIX 125-01	ATTIX 115-01	ATTIX 965-21 SD XC	ATTIX 961-01	ATTIX 751-71 MWF	ATTIX 751-61 LIQUID VAC	ATTIX 791-21 EC	ATTIX 761-21 XC	ATTIX 751-21	ATTIX 751-11	ATTIX 44-2L IC MOBILE	ATTIX 44-2L IC	ATTIX 33-2LIC MOBILE	ATTIX 33-2L IC	ATTIX 33-01 IC	ATTIX 50-21 PC EC
O O 3020028	0 0					•					0	0	0	0	0	0	0	0	0	0	0	0	. 0	0	0	0	0	0
O O 153	0 0				-						0	0	0	0	0	0	0	0	0	0	0	0	. 0	0	0	0	0	0
o o 3020014	0 0				-										0	0	. 0	. 0	0	0	. 0	. 0	-					-
O O 153	0 0				-						0	0	0	. 0	0	0	0	. 0	0	0	0	0	. 0	. 0	0	0	0	0
	•••••				• • • • • •			••••		•••••						• • • • • •						•••••	•••••					•••••
o o 51	0 0				-	•			0	0	0	0	0	0	0	0	0	0	0	0	0	0	. 0	0	0	0	0	0
0 0 411	0 0										0	0	0	0	0	0	0	0	0	0	0	0	. 0	0	0	0	0	0
O O 404	0 0	-			-				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
0 0 71									•	•	0	0	0	0	0	0	0	0	0	0		0		0	0	0	0	
0 0 78	0 0	-			-				0	0	0	0	0	. 0	0	0	0	. 0	0	0	. 0	0		. 0	0	0	0	0
O O 199	0 0	•	_						0	0	0	0	0	0	. 0	0	0	0	. 0	0	0	. 0		0	0	0	0	0
O O 312	0 0				•			•	0	0	0	0	0	. 0		0	. 0	0		0	. 0	. 0	. 0	. 0	0	0	0	0
					• • • • • •				••••														• • • • • •					•••••
O O 153	0 0	0	)	0	0	0	0	0							0	0	0	0	0	0	0	0	0	0	0	0	0	0
O O 3020027	0 0	0	)	0	0	0	0	0							0	•	0	0	0	0	0	0	0	0	0	0	0	0
0 0 1074013	0 0	0	)	0	0	0	0	0							0	0	0	0	0	0	0	0	0	0	0	0	0	0
0 0 60	0 0	0	>	0	0	0	0	0							0	0	0	0	0	0	0	0	0	0	0	0	0	0
O O 3020028					••••	0		0	••••	•••••				•••••	0	•	0	0		0	0	0		0		0		
								•									-											-
0 0 1074024	0 - 0	0		0	0	0	0	0							0	•	0	0	0	0	0	0		0	0	0	0	0

<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

CATENTONE THEMAL MICLIANE DISEASONAMI	STENTINE THERMAL RIGHATE SERCISSOMM  O O O O O O O O O O O O O O O O O			SALIIX 10 MAXXI II 35 WD	MAXXIII 55-1 WD	MAXXI II 55-2 WD	MAXXIII 75-1 WD	MAXXI II 75-2 WD	AERO 21-01 PC	AERO 21-01 PC INOX	AERO 21-21 PC	AERO 21-21 PC INOX	AERO 26-01 PC X	AERO 26-21 PC	AERO 26-2L PC	AERO 31-21 PC INOX	ATTIX 30-01	ATTIX 30-01 PC	ATTIX 30-11 PC	ATTIX 30-21 PC	ATTIX 40-01 PC INOX	ATTIX 40-21 PC INOX	ATTIX 50-01 PC	ATTIX 50-21 PC	ATTIX 50-21 PC CLEAN ROOM
System 38 Ver Phot Nozzie  HICOR NOZZIE DBB-850 WET AND DRY ADD  O O O O O O O O O O O O O O O O O O	System 38 Vas Files Made (SI FIRE PRODUIT AND DRY AD)  O O O O O O O O O O O O O O O O O O O			 0	0	0	0	0									0	0	0	0	0	0	0	0	c
System 38 Ver Provinced For Nazzer   System 38 Ver For Nazzer   System 38 Ver For Nazzer   System 38 Ver For Nazzer   System 38 Covered Construction   System 38 Cove	System 36 VACE FROM NOZZELE B986 MOZZELE D986 MOZZELE B986 MOZZELE B98	1	EXTEN TUBE THERMAL INSULATE Ø38X2500MM	0	0	0	0	0					-				. 0	0	0	0	0	0	0	0	C
OVEN NOZZLE 400X @ 38MM	OVEN NOZZIE 400X 6 SBMM O O O O O O O O O O O O O O O O O O O	ہ	System 38 Vac Floor Nozzle	0	0	0	0	0									0	0	0	0	0	0	0	0	c
System 38 Crevice/Cone Nozzle CREVICE NOZZLE 6388-120-200MM PP  OOOOOOOOOOOOOOOOOOOOOOOOOOOOOOOOO	System 38 Crevice/Cone Nozzle CREVICE NOZZLE 0385 RIZO-ZODMM  O O O O O O O O O O O O O O O O O O	1										-	-			-		-			-				
PRE CLEAN NOZZIE 038 R120-200MM  O O O O O O O O O O O O O O O O O O	PIPE CLEAN NOZZLE 038 R120-200MM  O O O O O O O O O O O O O O O O O O	No.		 	• • • • • • • • • • • • • • • • • • • •		• • • • • • • • • • • • • • • • • • • •					• • • • • •					• • • • • • • • • • • • • • • • • • • •		• • • • • • • • • • • • • • • • • • • •	••••	• • • • • • • • • • • • • • • • • • • •		• • • • • • • • • • • • • • • • • • • •		
TOOL ADAPTER 38/50 MM  O O O O O O O O O O O O O O O O O O	TOOL ADAPTER 38/50 MM  O O O O O O O O O O O O O O O O O O	1	CREVICE NOZZLE Ø38x300 MM PP	0	0	0	0	0									0	0	0	0	0	0	0	0	
CREVICE FLAT NOZZLE Ø38X240X65 MM  O O O O O O O O O O O O O O O O O O	CREVICE FLAT NOZZLE @38X240X65 MM  O O O O O O O O O O O O O O O O O O		PIPE CLEAN NOZZLE Ø38 R120-200MM	0	0	0	0	0					-	-			0	0	0	0	0	0	0	0	
System 36 Hose Vacuum Cleaner SUCTION HOSE D32X1800 CPL.  O O O O O O O O O O SUCTION HOSE D32X3500 CPL.  O O O O O O O O O O O O SUCTION HOSE D32X3500 CPL.  O O O O O O O O O O O O O O O O O O O	System 36 Hose Vacuum Cleaner  SUCTION HOSE D32X1800 CPL.  SUCTION HOSE D32X3500 CPL.  SUCTION HOSE D32X3500 CPL.  O O O O O O O O O O O O O O O O O O O	1	TOOL ADAPTER 38/50 MM	0	0	0	0	0					-	-		-	0	0	0	0	0	0	0	0	
System 36 Hose Vacuum Cleaner  SUCTION HOSE D32X1800 CPL.  SUCTION HOSE D32X3500 CPL.  O O O O O O O O O O O O O O O O O O O	SUCTION HOSE D32X3500 CPL.  SUCTION HOSE D32X3500 CPL.  SUCTION HOSE D32X3500 CPL.  O O O O O O O O O O O O O O O O O O O			0	0	0	0	0				-				-	0	0	0	0	0	0	0	0	
SUCTION HOSE D32X5000 CPL.  O O O O O O O O O O O O O O O O O O O	SUCTION HOSE D32X5000 CPL.  OOOOOOOOOOOOOOOOOOOOOOOOOOOOOOOOOOO	<b>O</b>	System 36 Hose Vacuum Cleaner	 	-		•		•	•	0	0	•	0	0	0			-		-				
SUCTION HOSE D32X2500 CPL.  O O • • O O O O O O O O O O O O O O O	SUCTION HOSE D32X2500 CPL.  O O O O O O O O O O O O O O O O O O O		SUCTION HOSE D32X3500 CPL.	 			-		0	0	0	0	. 0	•	0	•					-		-		
UNI. HOSE Ø36X3000MM EVA 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	UNI. HOSE Ø36X3000MM EVA  O O O O O O O O O O O O O O O O O O O		SUCTION HOSE D32X5000 CPL.	_			-		0	0	0	0	0	0	0	0	-		_		-		-		
UNI. HOSE Ø36X4000MM EVA 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	UNI. HOSE Ø36X4000MM EVA		SUCTION HOSE D32X2500 CPL.	 _			•		0	0	•	•		0	0	0	_		-		•		-		
UNI HOSE GREVANNONAMA W COURT INSERVA	UNI. HOSE Ø36X3000MM W COUPLING EVA O O O O O O O O O O O O O O O O O O O		UNI. HOSE Ø36X3000MM EVA	0	0	0	0	0	0	0	0	0	0	0	0	0		0	0	0	0	0	0	0	
UNI. HOSE Ø36X3000MM W COUPLING EVA			UNI. HOSE Ø36X4000MM EVA	0	0	0	. 0	0	0	0	0			0	0		. 0	0	. 0	0	. 0	0	. 0	0	
	UNIV HOSE WITH HAND TUBE Ø32X3000	9	UNI. HOSE Ø36X3000MM W COUPLING EVA	 . 0	0	0	. 0	0	0	0	0	. 0	. 0	0	0	. 0	. 0	0	0	0	•	0	•	0	

<sup>●</sup> Standard accessories
O Supplementary accessories
□ Supplementary and mountable accessories

0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0																													
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Item no.	ATTIX 965-0H/M SD XC	ATTIX 761-2M XC	ATTIX 44-2M IC	ATTIX 44-2H IC	ATTIX 33-2M PC	ATTIX 33-2M IC	ATTIX 33-2H PC	АТПХ 33-2Н ІС	SB TAND EM	SB STATION	ATTIX 155-01	ATTIX 145-01	ATTIX 125-01	ATTIX 115-01	ATTIX 965-21 SD XC	ATTIX 961-01	ATTIX 751-71 MWF	ATTIX 751-61 LIQUID VAC	ATTIX 791-21 EC	ATTIX 761-21 XC	ATTIX 751-21	ATTIX 751-11	ATTIX 44-2L IC MOBILE	ATTIX 44-2L IC	ATTIX 33-2L IC MOBILE	ATTIX 33-2L IC	ATTIX 33-01 IC	ATTIX 50-21 PC EC
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	153	0	0	0	0	0	0	0	0							0	0			0	0	0	0	0	0	. 0	0	0	0
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	153	0	0		0		0	0	0				-	• • • • • • • • • • • • • • • • • • • •		0	0	-		. 0	0	0	0	. 0	0		0	0	0
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				-														-				•				-			
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		•		0	0	0	0	0	0						•••••			0				•		0	0	0	0	0	0
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	3020027	0	0	0	0	0	0	0	0							0	0	0	0	0	0	. 0	0	0	0	. 0	0	0	0
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				_			•			_																			
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	633	0	0	0	0	. 0	0	0	0					•		0	0	-		0	0	. 0	0	. 0	0	. 0	0	0	0
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	2020020	•••••	••••	••••	•••••					•••••	•••••	••••			•••••											•••••			
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	3020028			-				0	0					•		0	•		0		0		0		0		0	0	0
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	80	0	0	0	0	0	0	0	0							0	0			0	0	0	0	0	0	. 0	0	0	0
1074056  1074056  1074056  1074056  1074056  1074056  1074056  1074056  1074056  1074056  1074056	3020028	0	. 0	0	. 0	0	0	0	0							0	0	0	0	0	0	. 0	0	0	0	. 0	0	0	0
1074056  1074066  1074066  1074066  1074066  1074066  1074066  1074066  1074066  1074066  1074066  107	435	-						0	0							0			0								0	0	0
1074056  1074066  107		-		-		-																				-			
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		•••••				-																-							
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				•	•		•											-				•			•	-			
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	107406	•	-	-	-											•			•			-		-	-		•		
O O O O O O O O O O O O O O O O O O O	1074021			-		•	•						•	•			•	-				-							
0       0	1074055	_		-		-																-				-			
0       0	158					. 0	0	0	0							0	0		0		0		0	. 0		. 0	0	0	0
O O O O O O O O O O O O O O O O O O O				-									•													•			
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	255	0	. 0	0	. 0	0	0	0	0							0	0	0	0	0	0	. 0	•	0	0	. 0	0	0	0
	469	0	0	0	0	0	0	0	0							0	0	0	0	0	0	0	0	0	0	. 0	0	0	0
	3020004						0	0	C								-	. 0									0		
	3020002			-					9								-				-								-
	1074099		0	0	0	0	0	0	0									0	0	0	0	0	0	0	•	0	•	•	0

<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

	SALTIX 10	MAXXI II 35 WD	MAXXIII 55-1 WD	MAXXI II 55-2 WD	MAXXI II 75-1 WD	MAXXI II 75-2 WD	AERO 21-01 PC	AERO 21-01 PC INOX	AERO 21-21 PC	AERO 21-21 PC INOX	AERO 26-01 PC X	AERO 26-21 PC	AERO 26-2L PC	AERO 31-21 PC INOX	ATTIX 30-01	ATTIX 30-01 PC	ATTIX 30-11 PC	ATTIX 30-21 PC	ATTIX 40-01 PC INOX	ATTIX 40-21 PC INOX	ATTIX 50-01 PC	ATTIX 50-21 PC
System 36 Hose Vacuum Cleaner HOSE Ø36X4000 AS EVA		0	0	. 0	0	0			•		-				. 0	0	0	0	0	0	0	0
HOSE AS D36X4000MM		0	0	0	0	. 0			•		-		-		. 0	0	0	0	0	0	. 0	0
HOSE Ø36X4000 MM AS RED		0	0	. 0	. 0	. 0			-				-		. 0	. 0	. 0	. 0	. 0	0	. 0	. 0
HOSE Ø36X5000MM AS W COUPLING		0	0	. 0	0	. 0			•		-		-		. 0	0	0	0	0	•	. 0	•
SUCTION HOSE Ø36X3500 HEAT/OIL-RESISTANT		0	0	. 0	0	. 0	0	0	0	0	0	0	0	. 0	. 0	0	0	0	0	0	. 0	0
System 36 Tube		••••		••••	••••	••••			••••	••••	• • • • •		••••	••••	• • • • •	••••	• • • • •		••••		• • • • •	
ADAPTER TUBE STRAIGHT AS Ø36MM		0	0	. 0	. 0	. 0	0	0	. 0	0	. 0	0	. 0	. 0	. 0	0	. 0	0	. 0	0	. 0	0
CURVED HAND TUBE Ø36MM SS		0	0	0	0	0	0	0	0	0	0	0	0	0	. 0	0	0	0	•	0	0	0
CURVED HAND TUBE D36MM ST/CR		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	•	•
EXTENSION TUBE D36 2X500MM ALU		0	0	0	0	0	•	•	•	•	0	0	0	0	•	•	•	0	0	0	0	0
EXTENSION TUBE Ø36 2X505MM SS	-	0	0	0	0	0	0	0	0	0	. 0	0	0	0	. 0	0	0	0	•	0	. 0	0
EXTENSION TUBE D36 2X505MM ST/CR		0	0	0	0	. 0	0	0	0	0	0	•	•	•	. 0	0	0	•	0	0	•	•
EXTENSION TUBE D36 2X515MM PLASTIC		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
TELESCOPIC TUBE D36 575-930MM CR-ST		0	0	0	0	. 0	0	0	0	0	•	0	0	0	. 0	0	0	0	0	0	0	0
TELESCOPIC TUBE Ø36X550-970 SS		0	0	0	. 0		0	0	. 0	0	. 0	0	. 0	0	. 0	0		0	. 0	0		0
TOOL ADAPTER D27/35/38		0	0	. 0	. 0	. 0			-		-		-		. 0	. 0	. 0	•	0	0	. 0	0
TOOL ADAPTER D27 QUICKSYSTEM	-	0	0	0	0	. 0	0	0	0	0	0	0	0	. 0	. 0	0	0	0	0	•		•
TOOL ADAPTER WITH SUCTION REGULATION D32		0	0	. 0	0	. 0	0	0	•	•	. 0	•	•	•	. 0	0	•	0	0	0	. 0	0
EXTENSION TUBE D36 3X350 MM SS		0	0				0	0				0								0		

<sup>●</sup> Standard accessories
O Supplementary accessories
□ Supplementary and mountable accessories

	Item no.	ATTIX 965-0H/M SD XC	ATTIX 761-2M XC	ATTIX 44-2M IC	ATTIX 44-2H IC	ATTIX 33-2M PC	ATTIX 33-2M IC	ATTIX 33-2H PC	ATTIX 33-2H IC	SB TANDEM	SB STATION	ATTIX 155-01	ATTIX 145-01	ATTIX 125-01	ATTIX 115-01	ATTIX 965-21 SD XC	ATTIX 961-01	ATTIX 751-71 MWF	ATTIX 751-61 LIQUID VAC	ATTIX 791-21 EC	ATTIX 761-21 XC	ATTIX 751-21	ATTIX 751-11	ATTIX 44-2L IC MOBILE	ATTIX 44-2L IC	ATTIX 33-2L IC MOBILE	ATTIX 33-2L IC	ATTIX 33-01 IC	ATTIX 50-21 PC EC
	63209	0	0	0	0	0	0	0	0	_				_		0	0	0	0	0	0	0	0	0	0	0	0	0	0
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	15311	0	0	0	0	0	. 0	0	0	-					•	0	. 0	0	0	. 0	0	0	0	. 0	0	0	0	0	0
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	107413544	0	0	. 0		. 0	. 0	•	•	-				-		. 0	. 0	. 0	0	. 0	0	. 0	0	. 0	0	. 0	0	. 0	0
	302001682	0	0	0	0	. 0	0	0	0	-				-		0	0	. 0	0	. 0	0	0	0	. 0	0	. 0	0	. 0	•
	302001677	0	0	0	0	0	0	0	0							0	0	•	0	0	0	0	0	0	0	0	0	0	0
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		•		•					-					-		-	-		-	-		-		-	-		-	-	0
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	46691	0	0	•	•	•	•	•	•							0	0	•	0	0	0	0	•	•	0	•	0	0	0
0	302000528	0	0	0	0	0	0	0	0	_				_		0	0	0	0	0	0	0	0	0	0	0	0	0	0
● 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	107400032	0	0	0	0	0	0	0	0	-					•	0	. 0	0	0	. 0	0	0	0	. 0	0	0	0	0	0
Color   Colo	107408074	0	0	•	•	•	•	•	•	-	-			-		0	. 0	•	0	. 0	0	0	0	. 0	•	. 0	•	. 0	0
O O O O O O O O O O O O O O O O O O O	302000529	0	0	0	0	0	0	0	0	-	•		•			0	0	0	0	. 0	0	0	0	0	0	. 0	0	•	0
0       0	40696	0	0	0	0	0	0	0	0	-				-		0	0	. 0	0	. 0	0	0	0	0	0	. 0	0	0	0
0       0	107402654	0	0	0	0	0	0	0	0	-	•			-	-	0	. 0	0	0	. 0	0	0	0	0	0		0	0	0
O O O O O O O O O O O O O O O O O O O	47109	0	0	0	0	0	0	0	0	-				-		0	0	0	0	0	0	0	0	0	0	. 0	0	0	0
O • O O O O O O O O O O O O O O O O O O	60916		0	0	0	0	0	0	0	-				-				0	0	0	0	0	0	0	0	0	0	0	0
	302000535	0	0	•	•	•	•	•	•	•				-		0	0	0	0	0	0	0	0	•	0	•	0	0	•
0 0 • 0 0 0 0 0 0 0 0 0 0 0 107416995	107409977		0	0	0	0	0	0	0	•				-				0	0	0	0	0	0	0	•	0	•	0	0
	107416995	0	0	0	0	0	0	0	0							. 0	0	. 0	0	0	0	O	0	•	0	•	0	. 0	0

<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

		SALTIX 10	MAXXI II 35 WD	MAXXIII 55-1 WD	MAXXI II 55-2 WD	MAXXIII 75-1 WD	MAXXI II 75-2 WD	AERO 21-01 PC	AERO 21-01 PC INOX	AERO 21-21 PC	AERO 21-21 PC INOX	AERO 26-01 PC X	AERO 26-21 PC	AERO 26-21 PC	AERO 31-21 PC INOX	ATTIX 30-01	ATTIX 30-01 PC	ATTIX 30-11 PC	ATTIX 30-21 PC	ATTIX 40-01 PC INOX	ATTIX 40-21 PC INOX	ATTIX 50-01 PC	ATTIX 50-21 PC	ATTIX 50-21 PC CLEAN ROOM
	System 36 Vac Floor Nozzle FLOOR NOZZLE Ø36X300MM		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	FLOOR NOZZLE Ø36X330 ALU	-			0			0	0	0						0				0	0			. 0
3	TEOGRAPH STATE OF THE STATE OF	•		-										-				-						-
	FLOOR NOZZLE Ø36X360MM WET/DRY			0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	. 0	0	0	0	0	0
	FLOOR NOZZLE Ø36X400 SPECIAL WET/DRY	-	0	0	0	0	0	0	0	0	. 0	0	0	0	. 0	0	0	. 0	. 0	0	0	0	0	0
		-		-								-		-				-						
0	FLOOR NOZZLE D36x300MM W/D KIT	-	0	0	0	0	0	•	•	•	•	0	•	•	•	•	•	•	0	0	0	0	0	0
	FLOOR NOZZLE D36X400MM W/D		0	0	0	0	0	0	0	0	0	. 0	0	0	. 0	0	0	0	•	•	0	•	•	0
•	COMBI NOZZLE Ø36X260MM PP	-			0			0	0	0			0			0	0				0		0	
•	CONDINCE E DOZEOWNIN I I			-										-										
	OFFICE COMBI NOZZLE Ø36X300MM		0	0	0	. 0	0	0	0		0	. 0	0	0	0	0	0	0	0	0	0	0	0	0
	NOZZLE ALU. 450XØ36MM DRY		0	0	0	. 0	0	0	0	0	0	. 0	0	0	0	0	0	. 0	0	0	0	0	0	
				•		•																-		-
	NOZZLE ALU. 450XØ36MM WET		0	•	0		0	0	0	0	0		0	0		0	0		0	0	0	0	0	
	COMBI NOZZLE Ø36X260MM		0	0	0	0	0	0	0	0	0	•	0	0	0	0	0	0	0	0	0	0	0	0
	WATER SUCTION NOZZLE Ø36X300				0			0	0	0						0	0				0			
		-		-					-													-		-
9	ELECTRIC TURBINE BRUSH Ø36X305MM 230V	•	•			•				0	0	•	0	0	. 0		•	0	0		0	-	0	0
	TURBINE BRUSH NOZZLE 300XØ36MM		0	0	0	0	0	0	0	0	0		0	0	. 0	0	0	. 0	. 0	0	0	0	0	. 0
					•	•					•	•	•	•										
	BRUSH STRIPS FOR 60356		•		0	•					•	•							•					
	System 36 Brush/Universal Nozzle	• • • • •				•						•		•				•		•		•		
	BRUSH NOZZLE Ø36X70		0	0	0	0	0	0	0	U	0		0		0	O	0		0		0		0	0
=	BRUSH NOZZLE Ø36X230 PP/PA		0	0	0	0	0	0	0	0	0	0	0	•	0	0	0	0	0	0	0	0	0	0
	UNIVERSAL NOZZLE D36X115		. 0		0		0	•	•	•	•	•	•	•	•	0		•		0	0	0	0	0
		•									•	•			•				•					

<sup>●</sup> Standard accessories
O Supplementary accessories
□ Supplementary and mountable accessories

ATTIX 50-21 PC EC	ATTIX 33-01 IC	ATTIX 33-2LIC	ATTIX 33-2L IC MOBILE	ATTIX 44-2L IC	ATTIX 44-2L IC MOBILE	ATTIX 751-11	ATTIX 751-21	АТПХ 761-21 XC	ATTIX 791-21 EC	ATTIX 751-61 LIQUID VAC	ATTIX 751-71 MWF	ATTIX 961-01	ATTIX 965-21 SD XC	ATTIX 115-01	ATTIX 125-01	ATTIX 145-01	ATTIX 155-01	SB STATION	SB TANDEM	АТПХ 33-2H IC	ATTIX 33-2H PC	ATTIX 33-2M IC	ATTIX 33-2M PC	ATTIX 44-2H IC	ATTIX 44-2M IC	ATTIX 761-2M XC	ATTIX 965-0H/M SD XC	Item no.
0	•	•	•	0	0	0	0	0	0	0	0	0	0	-					-	•	•	0	•	0	0	0	0	302002331
0	0	0	. 0	0	0	0	0	0	0	0	0	0	0		-		-		-	0	0	0	0	0	0	0	0	5147
0	. 0	0	. 0	0	. 0	0	. 0	0	. 0	0	. 0	0	. 0						-	. 0	0	•	0	. 0		0	0	60356
0	. 0	0	. 0	0	. 0	0	. 0	0	. 0	0	. 0	0	. 0	-		-			-	0	0	0	. 0	0	0	0	. 0	5149
0		0	. 0		. 0	0	. 0	0	. 0	0	. 0		. 0							. 0	0	0	. 0	. 0	. 0	0	. 0	107402706
																	_		-		0				-			_
0		0		•	•	0		0		0		0								0	0	0	0	•		0	0	302003666
0	. 0	0	. 0	0	. 0	0	. 0	0	. 0	0	. 0	0	. 0		-		-	-	-	0	0	0	0	0	0	0	0	302000477
0	0	0	0	0	0	0	0	0	0	0	0	0	0		-		-		•	0	0	0	0	0	0	0	0	302000259
0	0	0	. 0	0	0	0	0	0	0	0	0	0	0		_		_		_	0	0	0	0	0	0	0	0	15348
0	0	0	. 0	0	. 0	0	0	0	. 0	0		0	0						-	0	0	0	0	0	0	0	0	15349
0		0		0		0		0	. 0	0		0	. 0		_		_		_	0	0	0			0	0	0	302002365
0		0	. 0	0		0		0		0			. 0		_		_		_		0	0	0			0	0	7270
-			-								-				-		-		-									-
0	-	0	. 0	0	. 0	0	. 0	0	. 0				. 0	-		-			-	. 0	0	0	0	0	. 0	0		11664
0		0		0		0		0	0		-	0	0		-		-		-	0	0	0	0	0	0	0	0	54118
											-								-									60358
0	••••	0			••••		••••		••••				••••						•••••		0	0	0			0	0	5146
0		0	. 0			0	. 0	0	. 0	0	. 0		. 0							. 0	0	0	. 0	. 0	. 0	0	. 0	6086
											-				_		-		-									-
0		0		0		0	. 0	0	. 0	0	. 0	0	. 0							. 0	0	0	0				0	14295
-																												

<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

		SALTIX 10	MAXXIII 35 WD	MAXXIII 55-1 WD	MAXXIII 55-2 WD	MAXXIII 75-1 WD	MAXXIII 75-2 WD	AERO 21-01 PC	AERO 21-01 PC INOX	AERO 21-21 PC	AERO 21-21 PC INOX	AERO 26-01 PC X	AERO 26-21 PC	AERO 26-2L PC	AERO 31-21 PC INOX	ATTIX 30-01	ATTIX 30-01 PC	ATTIX 30-11 PC	ATTIX 30-21 PC	ATTIX 40-01 PC INOX	ATTIX 40-21 PC INOX	ATTIX 50-01 PC	ATTIX 50-21 PC	
	System 36 Brush/Universal Nozzle UNIV NOZZLE Ø36X150 ALU		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
1	TURBINE HAND BRUSH NOZZLE Ø36X150MM		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
^	RADIATOR BRUSH NOZZLE Ø36X420		0	0	0	. 0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	OVAL BRUSH NOZZLE Ø36MM		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	SUCTION BRUSH D36 BLACK		0	0	0	0	0	0	0	0	0	•	•	0	•	0	0	0	0	0	0	0	0	
	System 36 Crevice/Cone Nozzle  CREVICE NOZZLE D36X200		0	0	0	. 0	0	•	•	•	•	•	•	•	•	0	0	0	0	0	0	0	0	
•	CREVICE NOZZLE Ø36X300 PP		0	0	0	0	0	0	0	0	0	0	0	0	0	•	•	•	•	•	0	•	•	
	CREVICE NOZZLE Ø 36X15X920 ST/CR		0	0	0	0	0	0	0	0	0	. 0	0	0	0	0	0	0	0	0	0	0	0	
	DIA. TUBE NOZZLE Ø36x190 MM GREY RUBBER		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
				0	0			0	0	0	0													
	System 32 Hose Vacuum Cleaner  HOSE Ø32X4000MM AS RED		0	0	0	0	0									0	0	0	0	0	0	0	0	
	AS HOSED32X5000MM WITH TOOL		0	0	0	0	0						-			0	0	0	0	0	0	0	0	
	COAXIAL SUCTION HOSE Ø32 SET					-										-			0	-	0	-	0	
	HOSE SLEEVE Ø32 PVC		• • • • •											-	• • • • •						••••			
j.	System 27 Hose Vacuum Cleaner UNIV HOSE Ø27X3500 WITH TOOL ADAPTER EVA		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	HOSE D27X3500 AS WITH TOOL ADAPTER															0	0	0	0	0	0	0	0	
	TOOL ADAPTER D27/36-24 AS		0	0	0	. 0	0				•					0	0	0	0	0	0	0	0	

Item no.	ATTIX 965-0H/M SD XC	ATTIX 761-2M XC	ATTIX 44-2M IC	ATTIX 44-2H IC	ATTIX 33-2M PC	ATTIX 33-2M IC	ATTIX 33-2H PC	ATTIX 33-2H IC	SB TANDEM	SB STATION	ATTIX 155-01	ATTIX 145-01	ATTIX 125-01	ATTIX 115-01	ATTIX 965-21 SD XC	ATTIX 961-01	ATTIX 751-71 MWF	ATTIX 751-61 LIQUID VAC	ATTIX 791-21 EC	ATTIX 761-21 XC	ATTIX 751-21	ATTIX 751-11	ATTIX 44-2L IC MOBILE	ATTIX 44-2L IC	ATTIX 33-2L IC MOBILE	ATTIX 33-2L IC	ATTIX 33-01 IC	ATTIX 50-21 PC EC
5145	0	0	0	0	. 0	. 0	0	0	-	•	-		-		0	0	. 0	0	. 0	0	0	0	. 0	0	. 0	0	0	0
41275	0	0	0	0	0	0	0	0	-				-	-	0	0	-			0	0	0		0		0	0	0
5144	0	0	. 0	0	0	. 0	0	0	-		-		-		0	0			. 0	0	. 0	0	. 0	0	. 0	0	. 0	. 0
					-				-		-		-				-		-									
40455	0	0	0	0	. 0	. 0	0	0	-		-	•	-		. 0	0			. 0	. 0	. 0	0	. 0	0	. 0	0	. 0	. 0
302002509	0	•	0	0	0	0	0	0	-		-		-		0	0	-		0	0	0	0	•	0	•	0	0	0
	• • • • • •	• • • • •	• • • • • •		• • • • • •	• • • • • •	• • • • • •	• • • • • •	•••••		•••••		•••••		•••••		•••••	•••••	•••••		•••••	•••••	• • • • • •	•••••	• • • • • •		•••••	• • • • • •
29541	. 0	0	•	•	•	•	•	•	-				-		. 0	0	. 0	. 0	. 0	. 0	. 0	. 0	. •	•	. •	•	•	0
6084	0	0	0	0	0	0	0	0			-		-		0	0	•	0	. 0	0	0	0	. 0	0	. 0	0	. 0	0
17836	. 0	0	0	0	. 0	. 0	0	0	-				-			0			. 0	0	0	0	. 0	0	. 0	0	0	. 0
											•		•	_							-			-			•	-
5067		0	0	0	0	. 0	0	0	-		-		-		. 0	0	. 0	0	. 0	0	. 0	•	. 0	0	. 0	0	. 0	
40456	0	0	0	0	0	0	0	0	-		-		-		0	0	. 0	0	. 0	0	. 0	0	. 0	0	. 0	0	0	0
••••••	• • • • •		• • • • •		• • • • • •	• • • • •	•••••		•••••		• • • • •	•••••	•••••	•••••	•••••		•••••	• • • • • • • • • • • • • • • • • • • •	•••••	•••••	•••••	•••••	•••••	•••••	•••••		•••••	•••••
107413543	0	0	•	0	•	•	0	0	_		_				0	0	_		0	0	0	0	•	0	•	0	0	0
30657		0	0	0	0	. 0	0	0	-								0	0	. 0	0	. 0	0	. 0	0	. 0	0	. 0	0
			-					•	-		-		-		-			•			-	•		•			-	•
107400841		0	. 0	0	. 0	0	0	0	•		•		•						. 0	. 0	. 0	. 0	. 0	. 0	. 0	0	•	. 0
14682			0	0	0	0	0	0			•										•		. 0	0	. 0	0	0	
	•••••		•••••	•••••	•••••	• • • • • •		• • • • • •	•••••	•••••	•••••		•••••	•••••	•••••	• • • • • • • • • • • • • • • • • • • •	•••••		•••••		•••••	•••••	•••••	•••••	•••••	• • • • • • • • • • • • • • • • • • • •	•••••	•••••
14289		0	0	0	0	0	0	0					•				. 0	0	. 0	0	. 0	0	. 0	0	. 0	0	. 0	0
107406091		•	0	0	0	0	0	0	_								0	0	•	•	•	0	. 0	0	. 0	0	0	0
/ <del></del>			-																								•	

<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

		SALTIX 10	MAXXI II 35 WD	MAXXI II 55-1 WD	MAXXI II 55-2 WD	MAXXIII 75-1 WD	MAXXI II 75-2 WD	AERO 21-01 PC	AERO 21-01 PC INOX	AERO 21-21 PC	AERO 21-21 PC INOX	AERO 26-01 PC X	AERO 26-21 PC	AERO 26-2L PC	AERO 31-21 PC INOX	ATTIX 30-01	ATTIX 30-01 PC	ATTIX 30-11 PC	ATTIX 30-21 PC	ATTIX 40-01 PC INOX	ATTIX 40-21 PC INOX	ATTIX 50-01 PC	ATTIX 50-21 PC	ATTIX 50-21 PC CLEAN ROOM
	System 27 Brush/Universal Nozzle CURRY COMB Ø27MM		0	0	0	. 0	0	0	. 0	. 0	0	0	0	0	0	0	0	0	. 0	0	0	0	0	0
												•	•		•	•		-		•		-	•	•
	BRUSH CURRY COMB Ø 27MM		0	0	0	. 0	0	0	0	. 0	0	. 0	0	0	0	. 0	0	0	0	0	0	0	0	0
	SPIKED CURRY COMB Ø 27MM		. 0	0	0	. 0	0	0	0	0	0	. 0	0	0	0	. 0	0	0	0	0	0	0	0	0
	Filter	· · • · · · · ·		• • • • •		• • • • •				• • • • •		• • • • •		• • • • •		• • • • •		•		• • • • •		• · · · ·		•
>	Filterelement ATTIX							•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	0
	FILTER ELEMENT Ø275X185 PET M-CLASS			-		-				-		-		-		-				-		-		-
2		•		-								_							_			_		•
	FILTER ELEMENT D275X187 PET NANO M-CLASS	•										•				•						•	•	
	FILTER ELEMENT Ø211X140 H-CLASS															. 0	0	0	0	0	0	0	0	
		•		-					-	-		-		-		-		-	-	-		-		
	FILTER ELEMENT D275X187 H-CLASS											-		-		-		-		-		-	-	
				-		-		_						-								-		
	FILTER ELEMENT Ø185X140 HEPA H14			•	•			0	0		0		0		0		0	0	0	0	0	0	0	0
	ABSOLUTE FILTER KIT T22-T40 T40W-VHC200			-						-		-		-				-				-		-
				-								-								•		-		-
	KIT STAR FILTER D460 L CLASS	·····•	<b>.</b>	•		•			<u>.</u>	•	•	•		•	•	•		•		•		•		•
	18 POCKET STAR FILTER KIT M CLASS			•		•				•		•		•		•		•		•		•		•
				•		•			-	•				•		•		-			-			•
	ABSOLUTE FILTER KIT M.125/1216		_	•		•				•									_					•
	CARTRIDGE FILTER	•	•	-		-						-		-		-		-				-		
				-					<u> </u>	•		-		•		•		-		•		-		•
	CARTRIDGE FILTER			•	•	•	•				•	-			•	•				•		-	•	•
				•						•	•	•		•		•		-		•		-		
	HEPA CARTRIDGE FILTER		. 0	-						•		-										-		•
	HEPA CARTRIDGE FILTER			0	0	. 0	0							•								•		
	•			•	•	•				•		•		•		•				•		•	•	•
	FILTER ELEMENT Ø140X75 H-CLASS/HEPA			•		•				•	•	•		•	•			-				•	•	
				•				ļ				•				•								•

<sup>●</sup> Standard accessories
O Supplementary accessories
□ Supplementary and mountable accessories

							ı																						
ATTIX 50-21 PC EC	ATTIX33-01 IC	АТПХ 33-2L IC	ATTIX 33-2L IC MOBILE	ATTIX 44-2L IC	ATTIX 44-2L IC MOBILE	ATTIX 751-11	ALIA / 21-11	ATTIX 751-21	ATTIX 761-21 XC	ATTIX 791-21 EC	ATTIX 751-61 LIQUID VAC	ATTIX 751-71 MWF	ATTIX 961-01	ATTIX 965-21 SD XC	ATTIX 115-01	ATTIX 125-01	ATTIX 145-01	ATTIX 155-01	SB STATION	SB TANDEM	ATTIX 33-2H IC	ATTIX 33-2H PC	ATTIX 33-2M IC	ATTIX 33-2M PC	ATTIX 44-2H IC	ATTIX 44-2M IC	ATTIX 761-2M XC	ATTIX 965-0H/M SD XC	Item no.
0	0	0	. 0	0	. 0	0	)	0	0	0		-		-		-					0	0	0	0	0	0	0	-	6092
0	. 0	0	. 0	0	. 0	0	)	0	0	0								-			0	0	0	0	. 0	0	0	-	6093
. 0		0	. 0	. 0	. 0	0		0	0	0		-		-		-					0	0	0	. 0			. 0		6094
	•••••	•••••	•••••	••••	•••••						•••••	•••••	•••••	•••••	•••••	•••••	•••••	••••	• • • • • •	• • • • • •		••••		•••••	•••••	•••••	•••••	• • • • •	• • • • • • • • • •
•			-			•	•	•		•		-		-		-												-	302000490
			-		_				0			-		-	-	-	-	-						-		-	0	-	302000751
			-						•			-	•	•		-		-									•	0	107400562
0			-			0	) )	0		0		-		-	-	-		-	•									-	302000658
			-						0			-	0	0				-										•	107400564
0						0	)	0		0		-		-	-			-							-		-		302001095
												-		-	-	-	0	0									-	-	4056000523
			-									-		-	•	0	•	•										-	40000338
			-					-				-		-	. 0	•	0	0						-			-	-	40000699
			-									-		-	-	0		-										-	Z5 60357
	-											-		-			-	-									-	-	107407297
				_												_												-	107407300
		-															-												107409006
														-													-		107409007
	0	0		0	0		<u>-</u>												•	-	•	•	0	0	•	0			107413555

<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

		SALTIX 10	MAXXI II 35 WD	MAXXI II 55-1 WD	MAXXI II 55-2 WD	MAXXI II 75-1 WD	MAXXI II 75-2 WD	AERO 21-01 PC	AERO 21-01 PC INOX	AERO 21-21 PC	AERO 21-21 PC INOX	AERO 26-01 PC X	AERO 26-21 PC	AERO 26-21 PC	AERO 31-21 PC INOX	ATTIX 30-01	ATTIX 30-01 PC	ATTIX 30-11 PC	ATTIX 30-21 PC	ATTIX 40-01 PC INOX	ATTIX 40-21 PC INOX	ATTIX 50-01 PC	ATTIX 50-21 PC	ATTIX 50-21 PC CLEAN ROOM
,	Filter FLAT FILTER PTFE M-CLASS 1 PCS	<u> </u>		_		-			-					-				-		•		-		-
~	HEPA FILTER COVER KIT										-	-		-	-	-		-		-		-		-
	HEPA FILTER	•										-		-		-		-				-		
	Sack Filter CLOTH FILTER INSERT					•••••										• · · · · ·	•••••	•····		••••	••••	••••		• • • • • • • • • • • • • • • • • • • •
	SPEC CLOTH FILTER Ø375X350 NEEDLE FELT								-			-	-											
0000	SPECIAL CLOTH FILTER NEEDLE FELT			-												. 0	0	0	0	. 0	. 0	0	0	0
	CLOTH FILTER ATTIX 5/7 POLY NEEDLE FELT								-		-	-	-	-	-		-			•	-	-		-
•	SACK FILTER	•										-		-		-		-				-		
	Special Filter MOTOR COOLING AIR FILTER					•••••											•••••	-		••••				
	MOTOR COOLING FILTER KIT			-		-								-		. 0	0	0	0	0	0	0	0	•
	MOTOR COOLING AIR FILTER ATTIX9/IVB9					-						-		-		-		-		-		-		-
	FILTER FOR MOTOR COOLING 30/40/50										-	-	-	-	-	. 0	0	0	0	0	0	0	0	0
	FILTER FOR COOLING AIR 0.7X150X100 5 PCS											-												
	FILTER PROTECTIVE COVER Ø185X200					-		0	0	0	. 0	0	0	0	. 0	0	0	0	0	0	0	0	0	0
	WET FILTER SIEVE Ø143X140MM SS							0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
2)	WET FILTER SIEVE Ø218X176MM SS																							
	MOTOR COOLING AIR FILTER PET 1 PCS			•													-					-		
	WET FILTER	-	•																					

						ı																								
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	ATTIX 50-21 PC EC	ATTIX 33-01 IC	ATTIX 33-2LIC	ATTIX 33-2L IC MOBILE	ATTIX 44-2L IC		ATTIX 44-2L IC MOBILE	ATTIX 751-11	ATTIX 751-21	ATTIX 761-21 XC	ATTIX 791-21 EC	ATTIX 751-61 LIQUID VAC	ATTIX 751-71 MWF	ATTIX 961-01	ATTIX 965-21 SD XC	ATTIX 115-01	ATTIX 125-01	ATTIX 145-01	ATTIX 155-01	SB STATION	SB TANDEM	ATTIX 33-2H IC	ATTIX 33-2H PC	ATTIX 33-2M IC	ATTIX 33-2M PC	ATTIX 44-2H IC	ATTIX 44-2M IC	ATTIX 761-2M XC	ATTIX 965-0H/M SD XC	ltem no.
		•	•	•	•	)	•				-		_				-				_	•	•	•	•	•	•		-	107413540
o			0	. 0	. 0	)	0				-		-				-				-	0	0	. 0	0	0	0			107413542
• 17909  o		_			_	·····•					_		_				_				_		-		_				_	147 1250 600
• 17909  o	• • • • • • • •	• • • • • • • • • • • • • • • • • • • •		••••					•••••		• • • • • • • • • • • • • • • • • • • •		• • • • • •	•••••	•••••	•••••	• • • • • •	•••••	• • • • • • • • • • • • • • • • • • • •	•••••	• • • • • •	•••••	•••••	•••••	• • • • • • • • • • • • • • • • • • • •	•••••	• • • • • • • • • • • • • • • • • • • •	•••••	• • • • • • • • • • • • • • • • • • • •	
0 300000055  0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		-				·····•	_				-		-	0			-				-			-	-		-			302002894
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		-									-		-				-			•	•						-		•	17069
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0	-		-							-		-				-				-			-						302000606
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		-		•				0	. 0	0							-		-			-			-	-	-		•	302000525
O O O O O O O O O O O O O O O O O O O											-		-				-				-			-	-		-			
0		-		•	-						-						-										-		-	147 1432 500
O O O O O O O O O O O O O O O O O O O				••••		••••		0		0	0						• • • • • • •											0	• • • • • • • • • • • • • • • • • • • •	302000491
o	0	-		-													-										-		-	302003721
o		-						•			-		-				-				-				-		-		-	
O O O O O O O O O O O O O O O O O O O		-												0	0												-		-	107400041
O O O O O O O O O O O O O O O O O O O	0	-				•					-		-				-						-	-					-	107400453
O O O O O O O O O O O O O O O O O O O								0	. 0	0	0		-															0		302001871
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0							0	. 0		0		•								•	-		-		_		_		11801
0 0 0 0 0 0 107413541	0							0	0		0	•	•																	15475
0 0 0 0 0 0 107413541		•		•	_			•••••			•		•				•				•		•					-		302002665
107407299		0	0	0	0		0				•		•				•				•	0	0	0	0	0	0		•	107413541
					_																									107407299

<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

		0	135 WD	MAXXI II 55-1 WD	MAXXI II 55-2 WD	MAXXIII 75-1 WD	MAXXI II 75-2 WD	-01 PC	AERO 21-01 PC INOX	-21 PC	AERO 21-21 PC INOX	AERO 26-01 PC X	-21 PC	-2L PC	AERO 31-21 PC INOX	1-01	0-01 PC	)-11 PC	)-21 PC	ATTIX 40-01 PC INOX	ATTIX 40-21 PC INOX	0-01 PC	J-21 PC	
	Special Filter WET FILTER	SALTIX 10	MAXXI II 35 WD	• MAXXIII	•		MAXXIII	AERO 21-01 PC	AERO 21-	AERO 21-21 PC		AERO 26	AERO 26-21 PC	AERO 26-2L PC		ATTIX 30-01	ATTIX 30-01 PC	ATTIX 30-11 PC	ATTIX 30-21 PC	ATTIX 40		ATTIX 50-01 PC	ATTIX 50-21 PC	
	Filter BAG AERO 4 PCS							0	0	0				0				-						
1	FLEECE FILTER BAG PU 5 PCS			0	0	0	0		-			-		-				-		•	-			
	FLEECE FILTER BAG 5 PCS ATTIX 30															0	0	0	0				_	_
	FLEECE FILTER BAG 5 PCS ATTIX 40/50		0			•												•		0	0	0	0	
	FILTER BAG ATTIX 7 5 PCS											-						_				-		
	FILTER BAG SUPPORT SQ6																					-		
	DUST BAG 5-PCS	0		-					-	-		-	-	-			-	-		-		-		
	DUST BAG 10L 10PCS  SYNTHETIC DUST BAG 10L -10 PCS	0				-	-			-		-		-				-		-		-		
	FLEECE FILTER BAG 5 PCS ATTIX 33/44					-			-	-		-	-	-				-		-			-	_
	LONG LIFE FILTER BAG 1 PCS ATTIX 33/44											-		-				-				-		
	Disposal Bag				••••		••••					••••		• • • • •			••••	••••						
	DISPOSAL BAG ATTIX 3/30/40 5 PCS							0	0	0	0	0	0	0	0	0	0	0	0	0	0	-		_
	DISPOSAL BAG ATTIX 5/50 5 PCS								-	-		-		-				-		-			0	
	DISPOSAL BAG ATTIX 7 5 PCS																	-						
	DISPOSAL BAG FOR FILTER E LEMENT							0			0	0	0		υ	O			0		0			

I PC EC	IIC	JI.	ATTIX 33-2LIC MOBILE	JI.	ATTIX 44-2L IC MOBILE	_	1	11 XC	11 EC	ATTIX 751-61 LIQUID VAC	1 MWF	10	21 SD XC	10	01	10	10			HC	1 PC	MIC	M PC	J. T.	M IC	M XC	ATTIX 965-0H/M SD XC	ó
ATTIX 50-21 PC EC	ATTIX 33-01 IC	ATTIX 33-2LIC	ATTIX 33-2L	ATTIX 44-2L IC	ATTIX 44-21	ATTIX 751-11	ATTIX 751-21	ATTIX 761-21 XC	ATTIX 791-21 EC	ATTIX 751-6	ATTIX 751-71 MWF	ATTIX 961-01	ATTIX 965-21 SD XC	ATTIX 115-01	ATTIX 125-01	ATTIX 145-01	ATTIX 155-01	SB STATION	SB TANDEM	ATTIX 33-2H IC	ATTIX 33-2H PC	ATTIX 33-2M IC	ATTIX 33-2M PC	ATTIX 44-2H IC	ATTIX 44-2M IC	ATTIX 761-2M XC	ATTIX 965-(	Item no.
 					•••••		•••••																					107407302
																									_			107419590
						0	0	0	0			0														0		302002892
0																									-			107419591 107419592
						. 0	. 0	0	. 0		-			•		•			-	-					-	0	••••••	302001484
					-	0	0	0	0	-	-	0							-						-	0		302000200
									-																			82367810
									-		-														_			140 8618 000 82367820
	0	0	0	0	0		-		-										-	0	0	0	0	0	0			107419593
 	0	0	0	0	0		-		-		-								-	0	0	0	0	0	0			107413556
									-		-		-				•••••											302000804
0					-		-	-	-										-						-			302000728
						0	0	0	0				0											-	-	0	0	302001480
0	0	0	0	0	0	0	. 0		0											0	0	•	0		0			30082 107417821
	,	J				•		•									-		-									10717021

<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

### APPLIED RECORD RECO										×		X				×					X	X		
AMETY FILTER BOCK ATTURES STEET  MATTY FILTER BOCK NO. ATTURES STEET  MINE MINE MADE OF IS ASSESSMENDER  MINE MADE OF IS ASSES		Safety Filter Bag	SALTIX 10	MAXXIII 35 WD	MAXXIII 55-1 WD	MAXXIII 55-2 WD	MAXXI II 75-1 WD	MAXXIII 75-2 WD	AERO 21-01 PC	AERO 21-01 PC INOX	AERO 21-21 PC	AERO 21-21 PC INO	AERO 26-01 PC X	AERO 26-21 PC	AERO 26-2L PC	AERO 31-21 PC INOX	ATTIX 30-01	ATTIX 30-01 PC	ATTIX 30-11 PC	ATTIX 30-21 PC	ATTIX 40-01 PC INOX	ATTIX 40-21 PC INOX	ATTIX 50-01 PC	ATTIX 50-21 PC
ENALIST AN COLLECTOR EARLY DEBOLDED  Assembly  HOSE HOLDER KIT  SMALLE ASSET CREET KET WITH MUTS BOUTS  GROUND VALVE DAMAGE COMPLETE  ENALIST AN COLLECTOR  ENALIST AN COLLECTOR ATTIK 5/7  DISALUST AN COLLECTOR ATTIK 5/7  CHIP COLLECTOR ATTIK 5/7  CHIP COLLECTOR BASKET CREED STATE COMPLETE  CHIP COLLECTOR BASKET CREED STATE COMPLETE  THIN BASKET ATTION BASKET  ACCESSORY BASKET  THIN BASKET ATTION BASKET  MOSE HOLDERS		SAFETY FILTER BAG ATTIX/IVB 7 SETS																						-
Assembly HOSE HOLDER RIT  SMALL BASET POLICET KIT WITH NUTS BOLES  CRED AND VALUE DAGGET COMMETTE  CONJUST AIR COLLECTOR  CONJUST AIR COLLECTOR ATTIX SP  CHIP COLLECTOR ADDRESS TO SECURITY SP  CHIP		SAFETY FILTER BAG 5 PCS ATTIX 33/44																	-		-			
HOSE HOLDER KIT  SMALL BASKET OBJECT KIT WITH BUTS BOLTS  GRID AND VALVE DAGG PE COMPLETE  DEMANDS AND COLLECTIOR  DEMANDS AN COLLECTIOR  DEMANDS AN COLLECTIOR  DEMANDS AN COLLECTIOR ATTIX 577  DEMANDS AN COLLECTION BASKET DESPEKSORY  CHIP COLLECTION BASKET DESPEKSORY  ACCESSORY BASKET ATTIMS BASKC  TRANSBASKET KITD AGOLTOGO  TRANSBASKET KITD AGOLTOGO  HOSE HOLDER  HOSE HOLDER	· · · · · · · · · · · · · · · · · · ·	•																			• • • • • •		• • • • • • • • • • • • • • • • • • • •	
GRID AND VALVE D460 FE COMPLETE  EARNIST AIR COLLECTOR  EDIALIST AIR COLLECTOR O O O O O O O O O O O O O O O O O O		HOSE HOLDER KIT																						
Exhaust air collector  EXHAUST AIR COLLECTOR  EXHAUST AIR COLLECTOR ATTIX 5/7  EXHAUST AIR ADAPTER KIT  EXHAUST HITING KIT D50 ATTIX 9  Other  CHIP COLLECTION BASKET Ø392X390 SS  CHIP BASKET ATTIX9 BASIC  ACCESSORY BASKET  TRIM BASKET KIT D460 L100  HOSE HOLDER																								
EXHAUST AIR ADAPTER KIT  EXHAUST FITTING KIT DSO ATTIX 9  Other CHIP COLLECTION BASKET Ø392X390 SS  CHIP BASKET ATTIX9 BASIC  ACCESSORY BASKET  TRIM BASKET KIT D460 L100  HOSE HOLDER	4	Exhaust Air Collector			•												0	0	0	0	0	0	0	0
Other CHIP COLLECTION BASKET Ø392X390 SS  CHIP BASKET ATTIX9 BASIC  ACCESSORY BASKET  TRIM BASKET KIT D460 L100  HOSE HOLDER																								
Other CHIP COLLECTION BASKET Ø392X390 SS  CHIP BASKET ATTIX9 BASIC  ACCESSORY BASKET  TRIM BASKET KIT D460 L100  HOSE HOLDER																								
ACCESSORY BASKET  TRIM BASKET KIT D460 L100  HOSE HOLDER		Other CHIP COLLECTION BASKET Ø392X390 SS																			-			-
HOSE HOLDER																								
					-								0	0	•	0			-		-			-

<sup>●</sup> Standard accessories
O Supplementary accessories
□ Supplementary and mountable accessories

				BILE		BILE					D VAC			· ·														) XC	
	ATTIX 50-21 PC EC	ATTIX 33-01 IC	ATTIX 33-2LIC	ATTIX 33-2LIC MOBILE	ATTIX 44-2L IC	ATTIX 44-2L IC MOBILE	ATTIX 751-11	ATTIX 751-21	ATTIX 761-21 XC	ATTIX 791-21 EC	ATTIX 751-61 LIQUID VAC	ATTIX 751-71 MWF	ATTIX 961-01	ATTIX 965-21 SD XC	ATTIX 115-01	ATTIX 125-01	ATTIX 145-01	ATTIX 155-01	SB STATION	SB TANDEM	ATTIX 33-2H IC	ATTIX 33-2H PC	ATTIX 33-2M IC	ATTIX 33-2M PC	ATTIX 44-2H IC	ATTIX 44-2M IC	ATTIX 761-2M XC	ATTIX 965-0H/M SD XC	Item no.
					-	-				-		-	-													-	0		302001486
					-					-		-		-						-						-	-	0	302003473
																					0	0	0	0	0	-			107413549
					-	-				-		-	-	-	0	0	0	0		-						-			4084001017
• • • •		•••••					•••••	••••		•••••		•••••			0	0	0	0										-	40000856
										-				-	0	•										-			40000892
						-				-		-	-	-	0	0	0	0		-						-	-		Z5 60034
• • • •	0	•••••	•••••										•••••		•••••					-						•••••			302003717
							0	. 0	0	0		-														-	. 0	_	302000522
		0	0	0	0	0															0	0	0	0	0	0			107417865
										-		-	0	. 0						-						-			107409036
• • • •	•••••						0	0	0	0	•••••			0	•••••				•••••	-						•••••	0	0	302001612
										-		-	. 0	-		_				-		_				-	-		302003003
														0												-	-		302002624
										-		-			0	0	0	0								-	-		40000915
							0		0	0	0		-													-	0		65081

<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

	SALTIX 10	MAXXI II 35 WD	MAXXIII 55-1 WD	MAXXIII 55-2 WD	MAXXIII 75-1 WD	MAXXIII 75-2 WD	AERO 21-01 PC	AERO 21-01 PC INOX	AERO 21-21 PC	AERO 21-21 PC INOX	AERO 26-01 PC X	AERO 26-21 PC	AERO 26-2L PC	AERO 31-21 PC INOX	ATTIX 30-01	ATTIX 30-01 PC	ATTIX 30-11 PC	ATTIX 30-21 PC	ATTIX 40-01 PC INOX	ATTIX 40-21 PC INOX	ATTIX 50-01 PC	ATTIX 50-21 PC
Other TUBE HOLDER KIT D36							0	0	0	0		0		. 0			-					
AIRBOX 230V 50 HZ EU									•								-	0				. 0
AIRBOX 230/1/50 EU		-	-					-			-						-			-	-	
									-		-						-		-			-
FORKLIFT ACCESSORY		-	-												-		-			-		
SPARK EXTINGUISHER Ø50		•	-				0	0	0	0		0	0			0	0	0				0
DISCHARGE KIT MS2-53-T30S	-	-	-					-	-		-				-		-					
KIT MECANICAL FLOAT S3B SS	•		-						-		-						-				-	-
COINER EURO/TOKEN 12VDC									•					•			•		•			
TOKENS Ø26.0x2.3 SET-50 Ø6 HOLE									•													
GEKA THREADED FITTING		-	-		-				-		-						-		-		-	
PIPE COUPLING KIT	•	-	-		-				-		-				-		-			-	-	-
DETACH CORD SET 10M ORANGE EU	•		-		-				•					•			-		-			
DETACH CORD SET 10M ORANGE UK	0		-	-	-			-			-				-		-	-			-	
		-	-					-	-		-				-		-		-		-	
DETACH CORD SET 15M ORANGE EU		_	-											•			-				-	
NUMATIC ADAPTER 20PCS									•								-				-	
TELESCOPIC TUBE HOLDER KIT D32			-				0	0	0	0	. 0	0	0	0								
BOX FOR SUCTION HOSE ATTIX 7		-	-		-			-	-		-				-		-		-		-	
C-HOSE 15 M WITH CONNECT.		-	-						•								-		-		-	
							T															

<sup>●</sup> Standard accessories
O Supplementary accessories
□ Supplementary and mountable accessories

	SD XC														ŷ		ų.	ATTIX 751-61 LIQUID VAC					JIIBC		OBILE			U
ė	2-0H/M	I-2M XC	-2M IC	-2H IC	2M PC	ZM IC	2H PC	2H IC	Σ	z	2-01	2-01	2-01	-01	5-21 SD.)	1-01	1-71 MW	1-61 LIQI	1-21 EC	1-21 XC	1-21	Ξ	-2L IC MI	-21 IC	2LIC M	-21 IC	-01 IC	-21 PC E
Item no.	ATTIX 965-0H/M SD XC	ATTIX 761-2M XC	ATTIX 44-2M IC	ATTIX 44-2H IC	ATTIX 33-2M PC	ATTIX 33-2M IC	ATTIX 33-2H PC	ATTIX 33-2H IC	SB TANDEM	SB STATION	ATTIX 155-01	ATTIX 145-01	ATTIX 125-01	ATTIX 115-01	ATTIX 965-21 SD XC	ATTIX 961-01	ATTIX 751-71 MWF	TIX 75	ATTIX 791-21 EC	ATTIX 761-21 XC	ATTIX 751-21	ATTIX 751-11	ATTIX 44-2L IC MOBILE	ATTIX 44-2L IC	ATTIX 33-2L IC MOBILE	ATTIX 33-2L IC	ATTIX 33-01 IC	ATTIX 50-21 PC EC
107409979			-		•						-		-		·-			-	<u>.</u>	<u>-</u>	•		-		-		•	
107400079													-			•									-			0
107400075			•	•									•								•						•	-
302001192		0		•				•		•			-	•	0	•	•		0	0	0	0			-		-	
			_						_								-		-				_				_	
302002622															. 0													
																											•	
34591		0	0	0	0	0	0	0			_		-						0	0	0	0	0	0	0	0	0	0
			•	•					•				•								•						•	
4056000468											0	0	0	0			_		_			_	•		•	_		_
4056000519				-							0	0	0	0	_						-		-		-		-	
													-															
302000305									•	•			•			•									•		•	
				•	• • • • • • • • • • • • • • • • • • • •			•••••		•			-				-		- <del>-</del>				•		-		•	
5544									0	0			-														•	
																•	-											
7729			-	-	•		_		-		-		-		-		0	0	<u>.</u>	<u> </u>			-		-		•	
107402618													-				0	0	-						-			_
107402018			•								•		•								•						•	
107402676				•	•			•		•			-	•		•	•		··•		•						-	
																	-		-				_				_	
107402677			•	•									•														•	
107402901																-									-		-	
107404													•														•	
107401199																												
107409978				•				•••••		•			-								-							·····
-													•															
302001554																		0										
				-					_												-							
7567																	0	0									•	
																												-
107413551			0	0	0	0	0	0	_				_					<u> </u>				_	•	0	•	0	0	
-													•															
<u> </u>			•	•					•	•								1		L								

<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

		SALTIX 10	MAXXIII 35 WD	MAXXI II 55-1 WD	MAXXI II 55-2 WD	MAXXIII 75-1 WD	MAXXI II 75-2 WD	AERO 21-01 PC	AERO 21-01 PC INOX	AERO 21-21 PC	AERO 21-21 PC INOX	AERO 26-01 PC X	AERO 26-21 PC	AERO 26-2L PC	AERO 31-21 PC INOX	ATTIX 30-01	ATTIX 30-01 PC	ATTIX 30-11 PC	ATTIX 30-21 PC	ATTIX 40-01 PC INOX	ATTIX 40-21 PC INOX	ATTIX 50-01 PC	ATTIX 50-21 PC	ATTIX 50-21 PC CLEAN ROOM
Q	Other FLEXIBLE STRAP SET 2 PCS TROLLEY HANDLE KIT																	-		-		-		
<b>}</b>	STORAGE L-BOXX KIT W. DUSTBAGS																	-						
•••••	Option REMOVABLE CYCLONE D460 FE COMPLETE BIG Hose Vacuum Cleaner												-					-		• • • • •	••••			
0	HOSE CPL ANTISTATIC BLACK HOSE CPL D32	•																						
99	HOSE D32 1.9M CPL  HOSE D40 2.5M CPL		•	•	•		•																	
7	Tube EXTENSION TUBE ALUMINIUM	•		•	• • • •											• • • • •								•••
	EXTENSION TUBE D32 - SS  EXTENSION TUBE D40 - SS		•	•	•	•	•																	
/	TELESCOPIC TUBE ALUMINIUM	0																						
•••••	TELESCOPIC TUBE ACC.  Vac Nozzle Wet FLOOR NOZZLE D32 RUBBER STRIP	0	0															-						
	FLOOR NOZZLE D40 RUBBER STRIP			0	0	0	0																	
	HARDFLOOR NOZZLE 300MM x Ø32MM - KIT  HARDFLOOR NOZZLE 400MM x Ø32MM - KIT		0													-		-						

<sup>●</sup> Standard accessories
O Supplementary accessories
□ Supplementary and mountable accessories

	ATTIX 50-21 PC EC	ATTIX 33-01 IC	ATTIX 33-2LIC	ATTIX 33-2L IC MOBILE	ATTIX 44-2L IC	ATTIX 44-2L IC MOBILE	ATTIX 751-11	a participation of the partici	ATTIX 751-21	ATTIX 761-21 XC	ATTIX 791-21 EC	ATTIX 751-61 LIQUID VAC	ATTIX 751-71 MWF	ATTIX 961-01	ATTIX 965-21 SD XC	ATTIX 115-01	ATTIX 125-01	ATTIX 145-01	ATTIX 155-01	SB STATION	SB TANDEM	ATTIX 33-2H IC	ATTIX 33-2H PC	ATTIX 33-2M IC	ATTIX 33-2M PC	ATTIX 44-2H IC	ATTIX 44-2M IC	ATTIX 761-2M XC	ATTIX 965-0H/M SD XC	Item no.
		0	•	0	•	0				<u>.</u>					-		-	_			_	•	•	•	•	•	•			107413553
		0	0	•	0	•									-		-		-		-	0	0	0	0	0	0	-		107413552
		0	0	. 0	0	. 0									-							0	0	0	0	. 0	0			107413554
															-	•	0	0	0		-									Z5 60109
••••											•••••									•••••	-						-			107415116
																														147 0765 500
-															-												-			107407308
			•••••	•••••	••••		•••••		• • • •		•••••	•••••	•••••	•••••	•••••	•••••	••••	•••••		•••••	••••	•••••			• • • • •	•••••	•••••	•••••	• • • • •	011 6431 500
																														107407309
															-															107407337
																														011 8130 500
																	• • • • • •					•					-			107403804
																														107407310 107407338
																														107416575
																											-			107416576


<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

		SALTIX 10	MAXXI II 35 WD	MAXXI II 55-1 WD	MAXXI II 55-2 WD	MAXXI II 75-1 WD	MAXXI II 75-2 WD	AERO 21-01 PC	AERO 21-01 PC INOX	AERO 21-21 PC	AERO 21-21 PC INOX	AERO 26-01 PC X	AERO 26-21 PC	AERO 26-2L PC	AERO 31-21 PC INOX	ATTIX 30-01	ATTIX 30-01 PC	ATTIX 30-11 PC	ATTIX 30-21 PC	ATTIX 40-01 PC INOX	ATTIX 40-21 PC INOX	ATTIX 50-01 PC	ATTIX 50-21 PC	
	Vac Nozzle Wet HARDFLOOR NOZZLE 400MM x Ø40MM - KIT			•	•	•	•																	
	Hard Floor Nozzie FLOOR NOZZLE D32 BRUSH		•	•••••	••••	••••	•••••	••••	•••••		•••••				••••	••••	•••••	••••	•••••	•••••	••••	•••••		
				-																		-		
	FLOOR NOZZLE D40 BRUSH			•	•	•	•		-									-		-		-		•
1	NOZZLE MULTI SURFACE D32	•		-						•												-	-	•
	HARDFLOOR NOZZLE 350MM KIT	0		-								-										-		•····
		•				•				•					•	•				•••		-		
1=	HARDFLOOR NOZZLE 495MM KIT	0										-												
	Round Brush Nozzle		•••••	••••	••••	• • • • • • • • • • • • • • • • • • • •	•••••		••••	• • • • •	••••	•••••			••••	• • • • • • • • • • • • • • • • • • • •		••••	••••	••••	•••••	••••	• • • • •	••
10	BRUSH NOZZLE D32	•							•													•		•
	BRUSH NOZZLE D32	•	•	-								-						-				-	-	
• • • • • • • • • • • • • • • • • • • •	Crevice Nozzle		••••	•••••	••••	••••			• • • • • • • • • • • • • • • • • • • •	• • • • •	•••••	• • • • •			••••	••••		••••	••••	•••••	••••	•••••	• • • • •	••
	CREVICE NOZZLE D32	•	•						-	•														
	CREVICE NOZZLE D32 L153 BLACK	•		-						•						•				•		-		• · · ·
	CREVICE NOZZLE D40	•		•	•	•	•								•				-			-		-
				• • • • •		••••				• • • • •						••••		• • • • • • • • • • • • • • • • • • • •		• • • • • • • • • • • • • • • • • • • •		• • • • •		
~	Combination Nozzle  COMBI NOZZLE RD295 D32	0		-						-		-		-								-		•
	COMBI NOZZLE RD295P W.CLIP	0		-						-		-						-				-	_	
		•		-		•				•				•	•	•				•••		-		•
	Squeegee, Blade, Skirt and Splash Guard SQUEEGEE COMPLETE ANTHRACIT			0	0	0	0																	
· · · •	LEDA Eilea			•••••		••••	••••		••••		••••	• • • • •			••••	••••	••••	• • • • •	• • • • •	• • • • •	••••	••••	• • • • •	
	HEPA FILTER H13	•		_																				
	Extension Tube		• • • • • • • • • • • • • • • • • • • •	• • • • •	••••	••••	• • • • •		••••	• • • • •	•••••	••••			••••	••••	• • • • • • • • • • • • • • • • • • • •	••••	••••	• • • • • •	• • • • • • • • • • • • • • • • • • • •	••••	• • • • •	
1	EXTENSION TUBE STEEL D32	0							•	•					•									

### A PART OF THE																												
10040577  10040575  10040575  10040575  10040575  10040575  10040575  10040575  10040575  10040575  10040575  10040575  10040575  10040575																												
10040577  10040575  10040575  10040575  10040575  10040575  10040575  10040575  10040575  10040575  10040575  10040575  10040575  10040575																		Q,										
10040577  10040575  10040575  10040575  10040575  10040575  10040575  10040575  10040575  10040575  10040575  10040575  10040575  10040575	0.0	2M XC -OH/M SD XC	PM IC	SH IC	SM PC	O W	EH PC	D H	5	_	10.	01	10.	10.	-21 SD XC	10-	71 MWF	-61 LIQUID VA	-21 EC	21 XC	21	11	2L IC MOBILE	ST IC	ILIC MOBILE	ILIC	01 IC	11 PC EC
107407339 107407339 107407339 107407330 107413000 107413000 107413000 107413000 107413000 107413000 1074130000 10741300000 10741300000 107413000000 1074130000000000000000000000000000000000	Item n	ATTIX 761	ATTIX 44:	ATTIX 44-:	ATTIX 33-2	ATTIX 33-2	ATTIX 33-2	ATTIX 33-2	SB TANDE	SB STATIO	ATTIX 155	ATTIX 145	ATTIX 125	ATTIX 115-	ATTIX 965	ATTIX 961	ATTIX 751	ATTIX 751	ATTIX 791	ATTIX 761	ATTIX 751	ATTIX 751	ATTIX 44-:	ATTIX 44-;	ATTIX 33-;	ATTIX 33-2	ATTIX 33-0	ATTIX 50-;
160 KRR 579  160 K	107416577						-		-				-		-		-										-	
160 KRR 579  160 K			•••••		•••••		•••••	•••••	•••••	•••••	••••		•••••	•••••	•••••		•••••	•••••		• • • • • •	•••••		•••••		••••		•••••	• • • • • • • • • • • • • • • • • • • •
166 600 500  100413080  100423080  100423130  100423130  100423130  100423130  100423130  100423130  100423130  100423130  100423130  100423130	107407311		<u>-</u>		-		-						-		-		-		-									
107417000  107417001  107407312  107407312  107407314  107407334  107407334  107407334  107407334  107407334  107407334	107407339						-								-												-	
107407312  107407312  107407314  107407324  117 0146 500  1107407850  1107407551	140 6700 570						-												-									
149.8244.500  1107407312  1107407334  147 0146.500  140.8492.520  140.8492.520  1107407951	107413080		-	-	-		-	-					-		-		-		-								-	
107407312  107407334  147 0146 500  107408850  1107408850  1107417790  1107407051	107413081												-		-													
107407312 107407334 147 0146 500 117408850 1107407851 1107417790				•••••	•••••	•••••	•••••	•••••	•••••	•••••	••••		•••••	•••••	•••••	•••••	•••••	•••••	•••••	• • • • • •	•••••	•••••	•••••	•••••	•••••	•••••	•••••	
107407334  147 0146 500  107408850  107417790  107417790	140 8244 500		-				-						-		-		-											
147 0146 500  107408850  140 8492 520  107417790  107407051	107407312				•				-																•			
147 0146 500  107408850  140 8492 520  107417790  107407051	107407224				• • • • • •		•••••	•••••	•••••		••••		•••••	• • • • • •	•••••		•••••										•••••	
107408850  140 8492 520  1107417790  1107407051	107407334		_				-						•				•		-		-						-	
140 8492 520  107417790  107407051  147 1250 500	147 0146 500		-		•	•	•																		•		•	
107417790 107407051 107407051	107408850				-		-						-		-													
107417790 107407051 117407051	140 8492 520			•••••	•••••	•••••	•••••	•••••	•••••			••••	•••••	•••••	•••••		•••••	•••••			•••••	•••••		•••••		•••••	•••••	• • • • • • •
107407051	-		_				•																					
147 1250 500	10/417790						-																					
147 1250 500	107407051																											
			•••••	• • • • • • • • • • • • • • • • • • • •	• • • • •	••••	• • • • • •	•••••	••••		•		•••••	•••••	• • • • • •		•••••	•••••	••••	• • • • • •	••••		••••	•••••	••••		••••	• • • • • • • • • • • • • • • • • • • •
140 8246 040	147 1250 500									_										-								
	140 8246 040				•••••		•••••		•••••		••••	••••	•••••	•••••	•••••		•••••				••••						•••••	

<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

## Hose connection and distributors - EXCEPT Type 22 Vacuums

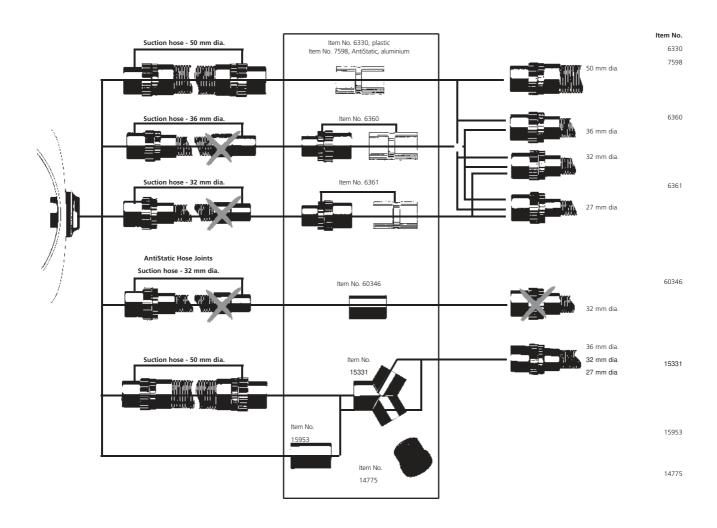

### **Suction hoses**





Universal

Silver metalic, Ø27, Ø32, Ø36, Ø38, Ø50 Colour: Temperature at -50 to +60°C

Antistatic

Black, Ø27, Ø32, Ø36, Ø50 To use: Temperature at -50 to +60°C

Oil-resistant

Brown, Ø36, Ø50 Temperature at -60 to +120°C Colour To use: (short term +150°C) Ø27 r = 60 mm, Ø32 r = 70 mm, Ø36 r = 75 mm, Ø50 r = 120 mm Bend radius:





Heat-resistant

Brown, Ø36, Ø50 Colour: Temperature at -60 to +120°C (short term +150°C) Ø36 r = 75 mm, Ø50 r = 120 mm Bend radius:





Chips, abrasive

Transparent, Ø50 Colour: Temperature at -40 to +90°C (short term +125°C)

Bend radius: Ø60 r = 60 mm

Special for metal shavings, glass, sliver and other materials, oil-resistant, antistatic, aluminium sleeves and steel wire coil



Metal

Colour: Galvanized, Ø50 To use: Temperature at -50 to +120°C

r = 180 mm Bend radius:

High wear-resistant. Not suitable for acid and lye.



## Suction hose systems — EXCEPT Type 22 Vacuums

		$\rightarrow$			((0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0		<b>A →</b>	ø			
Lengths as	required	Nozzle side sleeve	•••••	• • • • • • • • • • • • • • • • • • • •	By the metre – max 20 m	Vac	cum side sleeve	Complete			
						:		•			
		:		Item No.	Item No.	:	Item No.	Length m		Item No.	
System 70	Universal		<u></u>	42419	34947***	Ø70	34955	•			
		:			•	:		•			
-			-	-		:		•		***************************************	
••••••		· · · · · · · · · · · · · · · · · · ·	• • • • • •	•••••	•	:		•			• • • • • • • • • • • • • • • • • • • •
System 50	Universal		∑B	15101	11984	: A	15101	1.75	BA	19930 15358	
	Oil-resistant		∑B	15101	14238	. A	15101	•		6468	
	Heat-resistant Antistatic	Aluminium	<b>∑B ∑B</b>	7162 15811	14238 7599	: A	7162 15811	•		11061 15815	
	Chips	Aluminium	∑B	33435	15309	(A)	14630	•		15182	
	Metal					:		. 4		15013	
•••••		:		• · · · · · · · · · · · · · · · · · · ·		<u>.</u> 		- - -			
System 38	Universal	•	<b>∑</b> C	302002887	107400052	: : <b>A</b> >	107400049	. 4	>C A>	302002796	
	-		-	-	(only available in	•	-	•			
	-	:		-	roll of 20 m)	:	-	:		-	
	Antistatic		Œ	107410009		<b>A</b>	107401525	5	∑C A>	107401368	
•		•	∑G	107417868*	•	:	•	•			
	Universal		∑H _	11597	11985	(A)		3	∑H A>	15805	
System 36		•	∑G	107417867*	11985	: A	•	3 4	G A	46948* 25537*	
						:		•			
	Oil-resistant Heat-resistant	Aluminium	<b>∫G</b>	46690* 7674**	6429 6429	: A	15102 7673	3.5	G A	302001677* 6070**	
		Anti-kink spring	∑ <b>E</b> ]	14194**		:		•			
	AntiStatic	•	<b>∑G</b>	107417867*	15312	: : <b>A</b> >	15812	: : 3	G A	60781*	
	-		-	-		•	-	4	∑G A >	63209*	
	-	•		-	:	:	<u>-</u>	5	G A	302001682* 107413544*	
			∑H	14243	15312	•	15812	. 4	>H A>	15311	
•	Electric tool	: Connection DN 33-36	∑ <b>K</b> ]	48070	: *	Type	22 43960	•			
		DIN 44717, DN 35-40 AS		48750	•	:		•			
			• • • • • •	•••••	·	<u>.</u>		•	•••••••		
System 32	Universal		∑G	107417866*	14240****	<b>A</b>	15103	•			
		: Hand tube	∑H]	60911	14240****	: : <b>A</b> >	15103	3	∑H A>	302000473	
	Antistatic	•	∑G	107417866*	•	: <b>A</b> >	30928	4	∑G A>	107413543*	
	-	: Electric tool	<u></u>	107404564	43502	: : <b>A</b> >	30928	5	∑K A >	30657	
•••••		· · · · <del>.</del>	• • • • • • • • • • • • • • • • • • • •	•••••	:	<u>:</u>		•			• • • • • • • • • • • • • • • • • • • •
System 27	Universal	: Electric tool	<b>∑K</b> ]	107404520	15307	: : (A)	15104	3.5	∑K A>	14289	
	Antistatic	Electric tool	∑K	107404520	15326	<b>A</b>	15369	3.5	∑K A>	107406091	
				-	•	:	•	•		***************************************	
	•		•			:		•			
•		•	•			•	•				

## TYPE 22 - Industrial health/safety wet & dry vacs



### Build to pick-up combustible/flammable dust in ATEX Zone 22

- Approved for cleaning and dust extraction in ATEX Zone 22 environments with explosive dust
- Brushless long life EC motors for ignition source-free performance
- High quality stainless steel container
- Washable PET fleece filter with minimum 99.9% filtration efficiency
- A full range of TYPE 22 accessories is available to tailor your machine to your application

The ATTIX 40 TYPE 22 and ATTIX 7 TYPE 22 machines are powerful vacuum cleaners with stainless steel containers approved to be used for both M-class dust and ATEX Zone 22 environments. The build-in FlowSensor and acoustic warning signal monitors air speed in the suction hose to make sure that is does go below the minimum 20 m/s. The perfect concept for Industrial use where safety is a must.





TECHNICAL DATA	ATTIX 40-0M PC TYPE 22	ATTIX 791-2M/B1
Airflow rate (I/min.)	3200	3800
Vacuum (mbar/kPa)	230/23	250/25
Power Pmax (W)	1400	1500
Power Piec (W)	1100	1200
Working sound level (dB(A))	60	59
Container volume (I-max)	37	70
Mains connection (V/~/Hz/A)	230/1/50-60/16	230/1/50-60/16
Length x width x height (mm)	450x440x750	605x580x970
Weight (kg)	13	25
El cable (m)	7.5	7.5
Main filter type	PET	PET
Filter cleaning system	Push&Clean	
FEATURES		
Softstart	•	•
Anti-static system	•	•
Motor speed control		•
Automatic On/Off-elec. tools		•
Brushless longlife 1-ph. motor	•	•
Extra socket for tool		•
Fleece filter bag 1 pcs	•	•
STANDARD EQUIPMENT		
HOSE 27X3500 CONDUCTIVE TYPE22		107404779
HOSE Ø36X4000MM W COUPLING TYPE 22	44193	
TOOL ADAPTER D27/36-24 TYPE 22		107404521
CURVED HAND TUBE TYPE22 Ø36MM SS	44188	
DIAGONAL TUBE NOZZLE TYPE22 Ø36 RUBBER	302000227	
FILTER ELEMENT Ø185X140 PET M-CLASS	302000490	302000490
MOTOR COOLING AIR FILTER		302000491
MOTOR COOLING FILTER KIT	302003721	
ITEM NO.	107400410	302001537

## **Accessories for Vacuum cleaners**

	ATTIX 40-0M PC TYPE 22	ATTIX 791-2MB1	ATTIX 995-0H/M SD XC TVPE 22	Item no.
System TYPE 22 (ATEX) Hose Vacuum Cleaner HOSE 27X3500 CONDUCTIVE TYPE22	0	•		107404779
HOSE Ø50X4000MM CONDUCTIVE TYPE 22	0	0	0	43245
				42025
HOSE Ø50X4000MM CHIP TYPE 22	0	0	0	42825
HOSE Ø50X8000MM CHIP TYPE 22	0	0	0	63710
			-	
HOSE Ø36X4000MM W COUPLING TYPE 22	•	0	0	44193
TOOL ADAPTER D27/36-24 TYPE 22	0	•		107404521
TOTAL TENDETTOP 4 THE LE	0			10/404321
System TYPE 22 (ATEX) Tube/Nozzle			•	
EXTENSION TUBE TYPE22 Ø36X950MM SS	0	0	0	46982
CURVED EXTENSION TUBE TYPE22 Ø50x1100 S	0	0	0	33609
CURVED HAND TUBE TYPE22 Ø36MM SS		0	0	44188
DIAGONAL TUBE NOZZLE TYPE22 Ø36 RUBBER		0	0	302000227
DIAGONAL TUBE NOZZLE TYPE22 Ø50 RUBBER	0	0	0	42836
CREVICE NOZZLE TYPE 22 Ø36 L290MM PLAST	O	0	0	44192
CREVICE NOZZLE TYPE22 Ø50X350 PE	0	0	0	42837 
PIPE CLEAN NOZZLE TYPE22 Ø36 R70-120MM	0	0	0	48066
			•	
PIPE CLEAN NOZZLE TYPE22 Ø36 R120-200MM	0	0	0	48067
FLOOR NOZZLE TYPE22 Ø36X450MM	0	0	0	302000369
TOOTHOLEEL THE EZE DOUA-JUNIN		<b>J</b>		302000303
FLOOR NOZZLE TYPE22 Ø 50X500MM	0	0	0	42834
	•			
BRUSH NOZZLE TYPE22 Ø36X230MM PE	0	0	0	44191
			_	<u> </u>

## **Accessories for Vacuum cleaners**

	1				
	The state of the s			55	
		22		CTYPE	
	20	CTYPE	<u>18</u>	X QS W	
		0-0 M	.91-2M/	195-0H/	90
		ATTX 40-0M PC TYPE 22	ATTIX 791-2M/B1	ATTIX 995-0H/M SD XC TYPE 22	Item no.
	System TYPE 22 (ATEX) Tube/Nozzle				
	ROUND BRUSH NOZZLE TYPE22 Ø 50MM	0	0	0	42831
	FLAT NOZZLE TYPE22 Ø50MM RUBBER	0	0	0	42839
	COARSE DIRT NOZZLE TYPE22 Ø50x200MM ALU	0	0	0	42835
	System 50 Vac Floor Nozzle FIXED FLOOR NOZZLE Ø50X600MM ALU				302001481
100	FIXED FLOOR NOZZEE ØSOXBOUMIN ALU		0	0	302001481
		•			
-400000	Safety Filter Bag SAFETY FILTER BAG ATTIX 40/50 SET5	0			107400236
- 1111					
-	SAFETY FILTER BAG ATTIX/IVB 7 SET5	•	0		302001486
- 11111					
and the same	SAFETY FILTER BAG ATTIX/IVB 9 SET5			0	302003473
	Filter	• · · · · · · · · · · · · · · · · · · ·			•••••
	FILTER ELEMENT Ø185X140 PET M-CLASS	•	•		302000490
Carlotte Control of the Control of t					<u> </u>
					-
	FILTER ELEMENT D275X187 H-CLASS			•	107400564
				•	
	Filter Bag			•	107400564
٥			0	•	
	Filter Bag FLEECE FILTER BAG PU 5 PCS			•	107400564 302002892
	Filter Bag	0		•	107400564
	Filter Bag FLEECE FILTER BAG PU 5 PCS FLEECE FILTER BAG 5 PCS ATTIX 40/50	0	0	•	302002892 302004004
	Filter Bag FLEECE FILTER BAG PU 5 PCS	0		•	107400564 302002892
	Filter Bag  FLEECE FILTER BAG PU 5 PCS  FLEECE FILTER BAG 5 PCS ATTIX 40/50  FILTER BAG ATTIX 7 5 PCS	0	0	•	302002892 302004004
	Filter Bag FLEECE FILTER BAG PU 5 PCS FLEECE FILTER BAG 5 PCS ATTIX 40/50	0	0		302002892 302004004
	Filter Bag  FLEECE FILTER BAG PU 5 PCS  FLEECE FILTER BAG 5 PCS ATTIX 40/50  FILTER BAG ATTIX 7 5 PCS  Disposal Bag		0	•	302002892 302004004 302001484
	Filter Bag  FLEECE FILTER BAG PU 5 PCS  FLEECE FILTER BAG 5 PCS ATTIX 40/50  FILTER BAG ATTIX 7 5 PCS  Disposal Bag		0	0	302002892 302004004 302001484
	Filter Bag  FLEECE FILTER BAG PU 5 PCS  FLEECE FILTER BAG 5 PCS ATTIX 40/50  FILTER BAG ATTIX 7 5 PCS  Disposal Bag  DISPOSAL BAG ATTIX 3/30/40 5 PCS		0		302002892 302004004 302001484
	Filter Bag  FLEECE FILTER BAG PU 5 PCS  FLEECE FILTER BAG 5 PCS ATTIX 40/50  FILTER BAG ATTIX 7 5 PCS  Disposal Bag  DISPOSAL BAG ATTIX 3/30/40 5 PCS		0		302002892 302004004 302001484
	Filter Bag FLEECE FILTER BAG PU 5 PCS  FLEECE FILTER BAG 5 PCS ATTIX 40/50  FILTER BAG ATTIX 7 5 PCS  Disposal Bag DISPOSAL BAG ATTIX 3/30/40 5 PCS  DISPOSAL BAG ATTIX 7 5 PCS	0	0		302002892 302002892 302004004 302001484 302001480
	Filter Bag FLEECE FILTER BAG PU 5 PCS  FLEECE FILTER BAG 5 PCS ATTIX 40/50  FILTER BAG ATTIX 7 5 PCS  Disposal Bag DISPOSAL BAG ATTIX 3/30/40 5 PCS  DISPOSAL BAG ATTIX 7 5 PCS	0	0		302002892 302002892 302004004 302001484 302000804
	Filter Bag  FLEECE FILTER BAG PU 5 PCS  FLEECE FILTER BAG 5 PCS ATTIX 40/50  FILTER BAG ATTIX 7 5 PCS  Disposal Bag  DISPOSAL BAG ATTIX 3/30/40 5 PCS  DISPOSAL BAG ATTIX 7 5 PCS	0	0		302002892 302002892 302004004 302001484 302001480
	Filter Bag FLEECE FILTER BAG PU 5 PCS  FLEECE FILTER BAG 5 PCS ATTIX 40/50  FILTER BAG ATTIX 7 5 PCS  Disposal Bag DISPOSAL BAG ATTIX 3/30/40 5 PCS  DISPOSAL BAG ATTIX 7 5 PCS  DISPOSAL BAG FOR FILTER E LEMENT  Special Filter	0	0		302002892 302002892 302004004 302001484 302001480
	Filter Bag FLEECE FILTER BAG PU 5 PCS  FLEECE FILTER BAG 5 PCS ATTIX 40/50  FILTER BAG ATTIX 7 5 PCS  Disposal Bag DISPOSAL BAG ATTIX 3/30/40 5 PCS  DISPOSAL BAG ATTIX 7 5 PCS  DISPOSAL BAG FOR FILTER E LEMENT  Special Filter	0	0		302002892 302002892 302004004 302001484 302001480
	Filter Bag FLEECE FILTER BAG PU 5 PCS  FLEECE FILTER BAG 5 PCS ATTIX 40/50  FILTER BAG ATTIX 7 5 PCS  Disposal Bag DISPOSAL BAG ATTIX 3/30/40 5 PCS  DISPOSAL BAG ATTIX 7 5 PCS  Special Filter MOTOR COOLING AIR FILTER	0	0		302002892 302002892 302004004 302001484 302001480 302001480

# **Accessories for Vacuum cleaners**

	Special Filter	ATTX 40-0M PC TYPE 22	ATTIX 791-2M/B1	ATTIX 995-0H/M SD XC TYPE 22	Item no.
	MOTOR COOLING AIR FILTER ATTIX9/IVB9			•	107400041
				_	
	FILTER FOR MOTOR COOLING 30/40/50	0			107400453
				•	
· · · · · · · · · · · · · · · · · · ·				• • • • • • • • • • • • • • • • • • • •	<mark>.</mark>
	Other AIRBOX 230/1/50 EU			•	302001192
	AIRBOX 230 IF30 E0			•	302001132
				•	-
Po	FORKLIFT ACCESSORY			0	302002622
	ACCESSORY BASKET			. 0	302002624
• • • • • • • • • • • • • • • • • • • •	Exhaust Air Collector			• • • • • • • • • • • • • • • • • • • •	······································
	EXHAUST AIR COLLECTOR	0		•	302003717
				-	
	EXHAUST FITTING KIT D50 ATTIX 9			0	107409036
				•	
			• • • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • • •	· · · · · · · · · · · · · · · · · · ·
	Vacuum Accessory Set				
	TYPE 22 VACUUM SET Ø36MM 6-PCS	0	0	0	48907
	-				•



## **Single Phase Industrial Vacuums**

### VHS120





The most compact and powerful ever
2 Kw power, model VHS120 is suitable for the recovery of wet and dry materials. It is very compact, but it is equipped with a 37 liters container and it ensures excellent performances. Available in M and H class with Longopac® system for the recovery of toxic material. Available also as ACD version, for the recovery of combustible dust.







TECHNICAL DATA	TECHNICAL DATA Unit		VHS120 MC	VHS120 HC	
Voltage	V	230	230	230	
Frequency	Hz	50	50	50	
Protection class	IP	44	44	44	
Insulation class	Class	I	I	1	
Rated power	kW	2	2	2	
Airflow without hose	L/min	5500 – 330	5500 – 330	5500 – 330	
Vacuum max	kPa	21 – 210	21 – 210	21 – 210	
Sound pressure level	dB(A)	74	74	74	
Container capacity	L	37	-	-	
Longopac capacity	L	-	25	25	
Main filter type		L Class Polyester	M Class Polyester with glued seams	M Class Polyester with glued seams	
Main filter area	cm <sup>2</sup>	16000	16000	16000	
Upstream hepa filter H14 area	cm <sup>2</sup>	-	-	16000	
Inlet	mm	50	50	50	
Length x Width x Height	cm	56x57x101.5	63x62.8x130	63x62.8x130	
Weight	kg	38	51	51	

## **All-In-One Industrial Vacuums**



**Simplicity is the main concept behind the all-in-one range**We are talking about the simplicity of receiving the right combination for your application.
You can now choose between different models built according to the main needs of different segments and equipped with the best accessory kit which enhances the efficiency of your vacuum cleaner making it become the perfect solution for you.





Your task? Just plug and play... and continue doing your job without any thought.







Segment	PN Description		Application	Accessory Kit
	4012300135	VHS120 CC GV	For chips and liquids, 37 liters, singlephase (intermediate use)	Machinery Cleaning Kit (with 5 meters hose)
	4010400054	VHO200 with chips basket	For 75L liquids and 22L chips, with diverting valve for suction or discharge, singlephase (intermediate use)	Oil-proof Kit (with 5 meters hose)
METAL	4010500125	S3B L100 CC GV	For chips and liquids, 100 liters, singlephase	Machinery Cleaning Kit (with 5 meters hose)
WETAL	4012300187	VHS110 Z22 EXA AU FM	For combustible dust (St1, St2) in ATEX Zone 22	EXA Oil-proof machinery kit
	4030600522	T30S L100 CC with chips basket	For chips and liquids, 100 liters, threephase (continuous use)	Machinery Cleaning Kit (with 5 meters hose)
	4030500517	T40W L100 FM GV CC	For chips and liquids, 100 liters, threephase, 99,9% filtration	Machinery Cleaning Kit (with 5 meters hose)
	4012300188	VHS120 LC ACD PBS	For combustible dust in non-classified zones, singlephase (intermediate use)	Antistatic food-grade accessories kit
	4012300136	VHS120 FN	For the recovery of hot material, singlephase (intermediate use)	Ovens accessories kit
FOOD & BEVERAGE	4012300189	VHS110 Z22 EXA FM PBS	For combustible dust in ATEX zone 22, singlephase (intermediate use)	EXA food grade accessories kit
	4010400053	VHO200 X	For liquids, singlephase (intermediate use)	Alimentary Kit
	4030600523	CTS22 LC L100 ACD PBS	For combustible dust in non-classified zones, threephase (continuous use)	Antistatic food-grade accessories kit
	4012300068	VHS120	For general cleaning, 37 liters, singlephase (intermediate use)	Industrial Accessory Kit
MANUFACTURING	4012300187	VHS110 Z22 EXA AU FM	For combustible dust in ATEX zone 22, singlephase (intermediate use)	EXA Accessory Kit
MANUFACTURING	4010300474	S3 L100 LC FM	For general cleaning, 100 liters, singlephase (intermediate use)	Industrial Accessory Kit
	4030600524	T30S L100 FM	For general cleaning, 100 liters, threephase (continuous use)	Industrial Accessory Kit
B&C	4012300070	VHS120 HC	H-Class with Longopac®, for the safe recovery of fine dust, singlephase (intermediate use)	Antishock accessories kit

## **Single Phase Industrial Vacuums**





### Power, simplified

3 kW power with three independent motors, S3B industrial vacuum can collect wet and dry materials. In particular it is designed to be used in metal manufacturing production sites to extract metal chips, metal filings, oil and lubricant solutions.










The first digital and fully modular industrial vacuums
3 kW power with "by-pass" motor, model S3 can collect wet and dry materials. It is equipped with a practical electronic dashboard for an easy use and a constant monitoring of the vacuum efficiency. Available with 50 or 100 L bin or with Longopac® disposal system.





TECHNICAL DATA Unit		S3B	53
Voltage	V	230	230
Frequency	Hz	50-60	50-60
Protection class	IP	43	44
Insulation class	Class	I	I
Rated power	kW	3	3
Airflow without hose	L/min	8100	8100
Vacuum max	kPa	21	21.1
Sound pressure level	dB(A)	75	71
Container capacity	L	50-100	50-100
Main filter area	cm <sup>2</sup>	19500	19500
Inlet	mm	70	70
Length x Width x Height	cm	79.5x60x127.5-157	80x60x130-158
Weight	kg	67-70	68-71

## **Single Phase Industrial Vacuums**



### VHS110 ATEX



When a singlephase is ATEX certified

1.1 kW, suitable for the recovery of dry materials. VHS110 ATEX is suitable for Atex Z22 locations. Thanks to the brushless motor, this machine ensures high performance, it needs less maintenance and is suitable for continuous use. The innovative PullClean system effectively cleans the antistatic star filter while the vacuum is running. The optional HEPA14/ULPA15 upstream filter is the perfect choice when collecting fine dusts.







TECHNICAL DATA	Unit	VHS110 ATEX
Voltage	V	230
Frequency	Hz	50
Protection class	IP	64
Insulation class	Class	F
Rated power	kW	1.1
Airflow without hose	L/min	3600
Vacuum max	kPa	22
Sound pressure level	dB(A)	76
Container capacity	L	37
Main filter area	cm <sup>2</sup>	10000
Inlet	mm	50
Length x Width x Height	cm	56x57x124
Weight	kg	42

## **Threephase Industrial Vacuums**







### When power is essential


3 kW power, suitable for the recovery of wet and dry materials, it is the right choice for production companies looking for a vacuum with a good price/quality ratio. Available in three different versions: with 50 or 100 liters  $container \ and \ with \ gravity \ unload \ system \ through \ polyethylene \ LDPE \ bag \ or \ Longopac^{\circledast}, \ the \ "endless" \ bag \ for \ longopac \ bag \ longopac \ bag \ for \ longopac \ longopac \ bag \ for \ longopac \ longop$ dust collection.

CTS 22 - CTS 40 - CTT 40









2.2 and 4 kW power, the CTS-CTT series is suitable for the recovery of dry materials.

CTS models are equipped with side channel blower ensuring a higher vacuum performance while CTT models mount a turbine, providing an excellent airflow performance. The compact size assures ease of movement, manoeuvrability, and allows to reach any place.










TECHNICAL DATA	Unit	T30S	CTS22	CTS40	CTT40 (available only in Z1 version)	
Voltage	V	400	400	400	400	
Frequency	Hz	50	50	50	50	
Protection class	IP	55	55	55	55	
Insulation class	Class	F	F	F	F	
Rated power	kW	3	2.2	4	4	
Airflow without hose	L/min	5830	5300	7000	8900	
Vacuum max	kPa	31	30	23	18	
Sound pressure level	dB(A)	70	62	65	71	
Container capacity	L	50-100	50	50	50	
Main filter area	cm <sup>2</sup>	19500	19500	19500	19500	
Inlet	mm	70	70	70	70	
Length x Width x Height	cm	60x98x125-153	105x60x125	105x60x125	105x60x125	
Weight	kg	100-103	100	114	119	

## **Threephase Industrial Vacuums**





### **Tailored for metal production**

From 2.2 up to 7.5 kW, suitable for wet and dry materials. Different models for different needs, in particular the 4 kW model is available with double stage side-channel blower connected in series for a greater vacuum (model T40) or connected in parallel for an highest airflow (T40W). Ideal for the cleaning and maintenance of the plants.











### Health and safety as standard

From 2.2 to 4.3 kW power, for dry materials. This series has been designed to assure safety to production companies, even in explosion risk areas (they are ATEX certified), moreover L-M-H class versions are suitable for the collection of toxic dust. The side channel blower in series on models T22<sup>PLUS</sup> and T40<sup>PLUS</sup> allows to reach a high vacuum, while the side channel blower in parallel on model T40W<sup>PLUS</sup> assures a greater airflow. All T<sup>PLUS</sup> models can be customized.







TECHNICAL DATA Unit T22		T22	T40	T40W T75		T40PLUS	T40WPLUS
Voltage	V	400	400	400	400	400	400
Frequency	Hz	50	50	50	50	50	50
Protection class	IP	55	55	55	55	55	55
Insulation class	Class	I	I	I	F	F	F
Rated power	kW	2.2	4.3	4	7.5	4.3	4
Airflow without hose	L/min	5250	5250	8150	8900	5250	8150
Vacuum max	kPa	30	46	30	35	36	19
Sound pressure level	dB(A)	68	72	72	74	71	71
Container capacity	L	50-100	50-100	50-100	100	50-100	50-100
Main filter area	cm <sup>2</sup>	19500	19500	19500	35000	19500	35000
Inlet	mm	70	70	70	70	70	70
Length x Width x Height	cm	113x60x124-153	113x60x124-153	113x60x124-153	130x60x164	129x60x126-154	129x60x136-164
Weight	kg	111-114	132-135	136-139	188	162	167

## **Threephase Industrial Vacuums**











### **Endless power for endless possibilities**

From 5.5 up to 13 KW, these industrial vacuums are suitable for the recovery of wet & dry materials. They are strong, powerful and reliable, therefore they are ideal for continuous and heavy-duty uses. The wide filter area and the great capacity of the container avoid machinery downtimes. Different models for different needs: greater vacuum pressure, greater air flow or greater power. These vacuums are the most requested by the heavy industry.

3997 - 3997W - 3997WC







22 kW power, these models are suitable for the recovery of wet and dry materials. For continuous, heavy duty use, these industrial vacuums can be connected to a fixed central system thanks to their high power. The electric filter shaker is mounted as standard.





TECHNICAL DATA	Unit	3707	3707/10	3907*	3907/18*	3997*	3997C*	3997W*	3997WC*
Voltage	V	230/400	230/400	230/400	230/400	400	400	400	400
Frequency	Hz	50	50	50	50	50	50	50	50
Protection class	IP	55	55	55	55	55	55	55	55
Insulation class	Class	F	F	F	F	F	F	F	F
Rated power	kW	5.5	7.5	11	13	20	20	20	20
Airflow without hose	L/min	8100	13500	8400	18600	18600	18600	36000	36000
Vacuum max	kPa	35.3	24.5	43.1	29.4	44	44	25	25
Sound pressure level	dB(A)	78	78	78	78	79	79	78	78
Container capacity	L	175	175	175	175	175	175	175	175
Main filter area	cm <sup>2</sup>	35000	35000	35000	35000/66000	66000	110000	98000	110000
Inlet	mm	100	100	100	100	100	100	120	120
Length x Width x Height	cm	160x80x181	160x80x181	160x80x181	160x80x181	200x90x215	200x90x215	200x90x215	200x90x215
Weight	kg	291	305	411	360	650	697	650	697

<sup>\*</sup> Electric filtershaker as standard

## **Battery-Powered Industrial Vacuums**







### **VHB436**

### Lose the cord, enhance the benefits

Battery-powered industrial vacuum, which maintains the top-tier performance and filtration capabilities of the electric models, and couples it with high runtime enabled by the Lithium-ion Battery. It's ideal for use in high-traffic environments where efficiency matters as much as safety, and uncompromising results are key to business success.

Many versions available upon request: stainless steel, different disposal systems (Bagging system, Plastic bag system...), 100 L container.



TECHNICAL DATA		VHB436	VHB436 3B
Battery type		Combat II - Lithium-ion	Combat II - Lithium-ion
Battery quantity		2	3
Output battery voltage	V	36	36
Battery run time	min.	93	147
Battery charge time (100%)	min.	200	270
Battery charge time (90%)	min.	120	180
Voltage (charge mode)	V	110-240	110-240
Frequency (charge mode)	Hz	50/60	50/60
Insulation Class		Ш	III
Rated power	kW	2.4	2.4
Airflow with hose D70 - 3 M	l/min - m³/h	6333 - 380	6333 - 380
Vacuum max.	mBar	130	130
Sound pressure level	dB(A)	71	71
Container capacity	L	50**	50**
Main filter area	cm2	19,500	19,500
HEPA filter area	cm2	35,000	35,000
Inlet	mm	70	70
Length x Width x Height	cm	105x60x125	105x60x125
Weight	kg	125	135
Cable length (charger)	m	3	3

<sup>\*\*100</sup>L is available upon request

## **Compressed Air Industrial Vacuums**







### Compressed air, amplifying saving

Designed to operate whenever electricity is unavailable or forbidden, these models are ideal to recover both solid debris and liquid spills.

Models VHC110 and VHC120 are equipped with a new technology of multistage vacuum generator system, to ensure the minimum air consumption together with good performance. Model VHC200, the largest model in the range, is the right solution for applications where top vacuum and airflow are required in heavy duty applications. The range is available in ATEX version.







TECHNICAL DATA	Unit	VHC110	VHC120	VHC200
Air consumption (at 6 bar of pressure)	Nl/min	630	1260	2650
Required pressure	bar	4/7	4/7	6 max
Sound pressure level 1.5 m (ISO 3744)	dB(A)	71	72	70
Airflow without hose (at 6 bar of pressure)	l/sec	33	56	93
Vacuum max (at 6 bar of pressure)	kpa	32.5	32.5	38
Container capacity	1	37	37	50/100
Main filter type		"L" class Polyester Star filter	"L" class Polyester Star filter	Polyester Star filter
Main filter area	cm <sup>2</sup>	16000	16000	19500
Upstream hepa filter h14	cm <sup>2</sup>	16000	16000	35000
Inlet	mm	50	50	70
Length x width x height	mm	570x560x1010	570x560x1010	910x600x1300/1590
Weight	kg	37	37	67/70

## **Industrial Vacuums for Oil and Chips**





### Collecting liquids has never been so easy!

2.4 kW power, this singlephase industrial vacuum has been designed to collect up to 75 litres of any kind of liquid, also mixed with solid materials, and discharge them very fast by simply activating the valve to change the suction into a blowing flow. It can be equipped with an optional chip basket that can separate solid materials from liquids.

### **ECO-OIL 13 – ECO-OIL 22**



### Vacuum oil to save oil

1.3 kW singlephase and 2.2 kW threephase respectively, models ECO-OIL 13 and ECO-OIL 22 are specifically designed to recover oil, viscose liquids and chips, separate the solids from the liquids by means of "macrofiltration" and allowing the operator to recycle the recovered oil.









TECHNICAL DATA	Unit	VHO200	ECO-OIL 13	ECO-OIL 22
Voltage	V	230	230	400
Frequency	Hz	50	50	50
Protection class	IP	44	43	55
Insulation class	Class	1	В	F
Rated power	kW	2.4	1.3	2.2
Airflow without hose	L/min	4500	2675	5100
Vacuum max	kPa	23	31.3	32.3
Sound pressure level	dB(A)	70	70	71
Shaving capacity	L	22	30	30
Liquid capacity	L	75	180	180
Inlet	mm	50	50	50
Length x Width x Height	cm	58x88x123	67x105x150	67x105x150
Weight	kg	60	120	135

All models are equipped with anti-oil wheels with brakes.
All seals are in rubber anti-oil.

## **Industrial Vacuums for Additive Manufacturing**



The industrial vacuum cleaner is an important tool in the additive manufacturing, mainly during the changeover working cycles and at the end of the process. Nilfisk has designed a specific range of products and solutions for this segment, certified by third notified bodies, in compliance with the strictest regulations.





The range includes singlephase, threephase and compressed air vacuum cleaners, equipped with the immersion separator container, which is the ideal solution when combustible dust classified KSt3 has to be recovered.









TECHNICAL DATA	Unit	VHS110 Z22 EXA IS	T22PLUS L100 LC Z22 EXA IS	T40WPLUS L100 Z22 EXA IS	VHC110 Z1 EXA IS	VHC120 Z1 EXA IS	VHC200 L100 Z1 EXA IS
Voltage	V	230	400	400	-	-	-
Frequency	Hz	50	50	50	-	-	-
Protection class	IP	64	65	65	-	-	-
Insulation class	Class	F	F	F	-	-	-
Rated power	kW	1.1	2.2	4	-	-	-
Air consumption	Nl/min	-	-	-	630	1260	2650
(at 6 bar of pressure)							
Required pressure	bar	-	-	-	4/7	4/7	6 Max
Airflow without hose	L/min	3600	5250	8150	1980	3360	5580
Vacuum max	kPa	22	21	19	32.5	32.5	38
Sound pressure level	dB(A)	73	67	71	71	72	70
Max. dust quantity*	L	4*	6*	6*	4*	4*	6*
Main filter type		Antistatic M-class star filter					
Main filter area	cm <sup>2</sup>	10.000	19.500	35.000	10.000	10.000	19.500
Inlet	mm	50	70	70	50	50	70
Length x width x height	mm	560x570x1240	1290x600x1540	1290x600x1640	270x560x1240	570x560x1240	910x600x1590
Weight	kg	42	138	167	37	37	70

<sup>\*</sup> The maximum collection capacity derives from the presence of the inertization system. Local Standard requirements may impose even stricter limits, in terms of max collectable powder quantity.







### The vacuum for cleanrooms

Small vacuum unit, ideal for clean rooms, where maximum sterilization and full contamination control are standard requirements. It is quiet and can be completely sterilized, the right solution for recovering small  $\left( \frac{1}{2} \right)$ quantities of toxic powder (HEPA/ULPA filtration).

### **VHS110 CR**



**Cleanroom-friendly, wet & dry**Wet&Dry single phase vacuum cleaner for cleanrooms. The GMP design and the stainless steel execution make it extremely easy to clean and sanitize.

The ULPA15 downstream filter avoids contamination of the cleanroom area, as well the optional upstream HEPA14 or ULPA15 filter secure the highest filtration efficiency in case of very fine dust.







TECHNICAL DATA	Unit	IVT1000	IVT1000 H-CLASS	IVT1000 SAFE PACK	VHS110 CR
Voltage	V	220-240	220-240	220-240	230
Frequency	Hz	50-60	50-60	50-60	50
Protection class	IP	40	40	40	54
Insulation class	Class	-	-	-	I
Rated power	kW	1.2	1.2	1.2	1
Airflow without hose	L/min	2283	2100	2100	2967
Vacuum max	kPa	19.8	20	20	20.5
Sound pressure level	dB(A)	61	61	61	76
Container capacity	L	12.5	12.5	-	37
Dust bag capacity	L	6.5	8	6.5	-
Main filter area	cm <sup>2</sup>	2100	2573	2573	10000
Inlet	mm	32	32	32	50
Length x Width x Height	cm	30x30x62.5	30x30x72.5	30x30x70	56x57x124
Weight	kg	9	11.5	9	39



### VHW200 - VHW201 - VHW210 - VHW211



### The most compact vacuum cleaners for automated applications

From 0.45 up to 0.85 kW power, these three-phase fixed industrial vacuums are the smallest of Nilfisk range and are ideal to be integrated in process machines for the extracting and recovering of small quantities of dust or trimmings. Designed in compliance with GMP requirements, they are quiet and provide excellent filtration thanks to the main filter bag and the HEPA H14 upstream absolute filter as standard.

### VHW310 - VHW311



### Best onboard vacuum technology

1.5 kW power. Ideal to be integrated into process machine where only a limited space is available and high performances are required. Model VHW311 can be easily upgraded on the field with absolute filter and wheels, so as to become a mobile industrial vacuum.









TECHNICAL DATA	Unit	VHW200	VHW201	VHW210	VHW211	VHW310	VHW311
Voltage	V	400	400	400	400	400	400
Frequency	Hz	50	50	50	50	50	50
Protection class	IP	55	55	55	55	55	55
Insulation class	Class	I	I	I	I	I	I
Rated power	kW	0.45	0.45	0.85	0.85	1.5	1.5
Airflow without hose	L/min	1192	1192	1933	1933	3500	3500
Vacuum max	kPa	14.8	14.8	21	21	24	24
Sound pressure level	dB(A)	56	56	62	59	61	60
Container capacity	L	1	6.5	6.5	6.5	15	15
Main filter area	cm <sup>2</sup>	1330	1840	1840	1840	4200	4200
Inlet	mm	40	40	40	40	50	50
Length x Width x Height	cm	53x27x41.5	42x43x82	64x33x47.5	42x43x82	42x71x90.5	42x71x90.5
Weight	kg	17	25	23	31	49	61



### VHW320 - VHW321







### **Multifunctional innovation**

1.5 kW power. Ideal to be used both as equipment of process machines and/or for cleaning and maintenance activities, they mount the new PullClean system to clean effectively the cartridge filter while the vacuum is running. VHW321, thanks to its innovative and smooth design, is extremely easy to clean and sanitize (GMP conformity). The H-class certified vac allows the safe replacement of the absolute filter without getting in contact with hazardous material.

### VHW420 - VHW421









### When hygiene meets performances

2.2 kW power. Model VHW420 has been designed to ensure the highest performances in fully automated applications operating 24/7. Model VHW421 is the perfect symbiosis between performances and hygienic design for GMP requirements, it is easy to clean and sanitize but powerful.









TECHNICAL DATA	Unit	VHW320	VHW321	VHW420	VHW421
Voltage	V	400	400	400	400
Frequency	Hz	50	50	50	50
Protection class	IP	55	55	55	55
Insulation class	Class	F	F	F	F
Rated power	kW	1.5	1.5	2.2	2.2
Airflow without hose	L/min	3200	3200	5100	5100
Vacuum max	kPa	18.5	18.5	19	19
Sound pressure level	dB(A)	60	61	63	65
Container capacity	L	25	25	46	46
Main filter area	cm <sup>2</sup>	10000	10000	20000	20000
Inlet	mm	50	50	70	70
Length x Width x Height	cm	44x78x117	44x73.5x117	54x97x139	54x97x139
Weight	kg	73	83	100	113



### VHW440 - VHW441



The highest performances for total hygiene productions
4 kW power, it provides excellent performances in terms of vacuum, airflow and filtration for the total cleaning of production areas. VHW441, thanks to its smooth design, is extremely easy to clean and sanitize (GMP conformity).







TECHNICAL DATA	Unit	VHW440	VHW441
Voltage	V	400	400
Frequency	Hz	50	50
Protection class	IP	55	55
Insulation class	Class	F	F
Rated power	kW	4	4
Airflow without hose	L/min	7000	7000
Vacuum max	kPa	23	23
Sound pressure level	dB(A)	67	67
Container capacity	L	46	46
Main filter area	cm <sup>2</sup>	20000	20000
Inlet	mm	70	70
Length x Width x Height	cm	54x97x139	54x97x139
Weight	kg	113	113

## **Industrial Vacuums for Packaging and Trims**



### R series



The fastest way to collect trims

From 0.85 to 4 kW power, suitable for the recovery of trims and cuttings (paper, plastic, textile) from production lines.

Suction power, construction features and dimensions are therefore tailored according to the production machines they need to serve.









TECHNICAL DATA	Unit	R104	R154	R155	R305	3507W R
Voltage	V	230/400	230/400	230/400	230/400	230/400
Frequency	Hz	50	50	50	50	50
Protection class	IP	55	55	55	55	55
Insulation class	Class	F	F	F	F	F
Rated power	kW	0.9	1.1	1.1	2.2	4
Airflow without hose	L/min	2600	3300	3300	5100	8600
Vacuum max	kPa	23	21	21	31	29
Sound pressure level	dB(A)	68	72	72	75	74
Container capacity	L	114	114	150	150	215
Main filter area	cm <sup>2</sup>	11500	11500	14350	14350	19000
Inlet	mm	50	50	50	50	70
Length x Width x Height	cm	56x120	56x120	66x125	66x125	120x70x140
Weight	kg	38	40	47	61	155

## **Pneumatic Conveyors**



### **PNEUMATIC CONVEYORS**



Nilfisk pneumatic conveyors can be compressed air or electrically driven, and are compliant with EU Regulation 1935/2004 – available in ATEX versions and suitable for collecting combustible powder. The range of conveyors offered includes stand-alone and customized, ready-to-use machines, that require minimal installation effort and offer a wide range of performance options tailored to industry or desired material processing needs. Nilfisk pneumatic conveyor lines include the 3-Series, 9-Series, AX-Series and PCT-421FG-Series respectively.











SECTOR OF APPLICATION	MATERIALS	*KG/H	TECHNOLOGY	PUMP (SIZE) OR MOTOR (KW)	CERTIFICATIONS	ADVISED CONVEYOR
	Fine powders / Grains	550-1100	Venturi ejectors vacuum	2 ejectors	71 <b>FD∕A €</b>	3CP0422-220
	Fine powders / Grains	250-800	Venturi ejectors vacuum	2 ejectors	맛 <b>주소 &amp;</b>	3CP0422-150
	Fine powders / Grains	150-550	Venturi ejectors vacuum	2 ejectors	Ti <b>FD/A €</b>	3VP0322-100
FOOD AND	Fine powders	550-1100	Electric vacuum	0.55 KW	Si <b>FDA €</b>	3CT0322-150 F25
PHARMA	Fine powders	150-650	Electric vacuum	0.55 KW	T' <b>FD/∆</b> €	3CT0422-150
	Fine powders	150-400	Electric vacuum	0.55 KW	T' <b>FD∕A €</b>	3VT0322-100
	Empty capsules	40.000**	Electric blowing	0.40 KW	T' <b>FD∕A €</b>	9GT1645-282A X
	Empty capsules	65.000**	Electric blowing	1.00 KW	71 <b>FD/A</b> 60	9GT1645-282A FC X
	Fragile grains / Tablets	100-600	Electric vacuum	2.20 KW	뎟	PCT421FG
	** capsules per minute					
	Fine powders /Grains	550-1110	Venturi ejectors vacuum	2 ejectors	R'i FDA 😥	3CP0422-220
FOOD AND OTHER	Fine powders	550-1110	Electric vacuum	0.55 KW	T' <b>FD∕A €</b>	3CT0422-220 F25
INDUSTRIES	Grains	100-300	Electric vacuum	1 KW	뎟	A128XRF
	Grains	100-300	Electric vacuum	1 KW		A128XR
					I	
	Powders or grains	2100-3000	Electric	12.5 KW	뎟	
	Powders or grains	1600-2100	Electric	7.5 KW	Si,	
FOOD AND PHARMA	Powders or grains	900-1600	Electric	4 KW	<b>닷</b>	Systems
	Powders or grains	500-900	Electric	2 KW	Si	
	Powders or grains	100-300	Electric	1 KW	兄 <sup>†</sup>	
			1			
	Powders or grains	2100-3000	Electrical	12.5 KW		
	Powders or grains	1600-2100	Electrical	7.5 KW		
OTHER INDUSTRIES	Powders or grains	900-1600	Electrical	4 KW		Systems
	Powders or grains	500-900	Electrical	2 KW		
	Powders or grains	100-300	Electrical	1 KW		

## **Centralized Vacuum Systems**



### **CENTRALIZED VACUUM SYSTEMS**


Centralized vacuum systems are the perfect tool to efficiently clean wide areas, with a lot of floor space, large amounts of waste to collect and even when interconnected to process machines to provide vacuum where needed.

Many the advantages:

- · It allows to collect materials from many inlets simultaneously;
- $\cdot\,$  it can work continuously, allowing an immediate saving on resources;
- · vacuumed materials are collected in one single container, placed either inside or outside the factory, making it easier for the operators to provide for their disposal or recycling.

Centralized vacuum systems consist essentially of a suction unit, a control panel, a filtration system, a discharge system and a series of pipes with inlets in the requested positions.

The new range has been designed in order to be modular, silent, green. Simply smart.

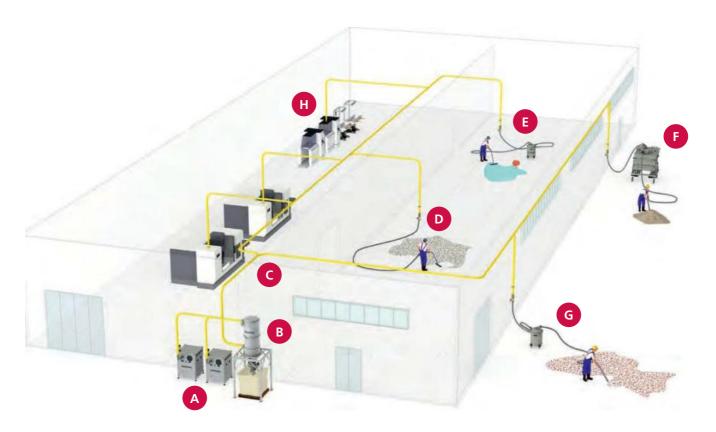

- A Suction Unit
- B Silo/Filter Chamber
- Pipeline

- Inlet for the tools quick connections
- E Liquid pre-separator
- Heavy Duty Pre-Separator
- G Hot material pre-separator
- Process machines interconnection

## **GM 80P – Single-phase Dry**





### Lightweight and heavy-duty performance

- Low noise operation
- Washable filter in Polyester or Cotton material
- PTFE (non-stick) and Nomex (heat resistant) filter optional
- 9 liters container capacity
- Lightweight aluminium construction built for years of heavy duty cleaning
- Unique dual filter solution avalaible with HEPA or ULPA exhaust filters
- Bagless operation possible
- Dust class L-certification

Lightweight and portable, the Nilfisk GM 80P is the symbol of Nilfisk quality and provides durability, high performance and efficient cleaning – required by dust control professionals.

The sturdy aluminium container means that the vacuum cleaner is almost indestructable and therefore especially suitable for rough and heavy duty cleaning.

Mounted on a strong steel trolley with large rubber wheels, the machine is easy to manoeuvre. Ideal for e.g. production lines, chemi/pharma industries, hospitals and offices.



TECHNICAL DATA	GM 80P LC
Rated power (W)	1200
Inlet (mm)	38
Container capacity (I)	12.25
Main filter type	COTTON
Suction power end of tube (W)	270
Main filter area (cm²)	2100
Length x width x height (mm)	390x300x410
Weight (kg)	8
FEATURES	
Detachable cord	•
Robust steel chassis	•
Fleece filter bag	•
Washable filter	•
L-class hazardous dust approval	•
STANDARD EQUIPMENT	
HOSE 38/32MM 2M STEEL BENT END	12097500
EXTENSION TUBE D32	11112401
BRUSH ROUND GREY 100 NATU	11276901
CREVICE NOZZLE KIT	81140900
COMBI NOZZLE ROLLER PC D32	140 8492 510
FILTER COTTON GS/GM 80	61543000
MICRO-STATIC FILTER	11641000
TUBE BENT END D32 STEEL KIT	107402630
ITEM NO.	107418493

## VHS 40 - Single-phase Wet & Dry





### Superior and powerful vacuum cleaner

- InfiniClean™ Automatic filter cleaning system with minimized performance loss
- PTFE long-life filter with non-stick membrane and minimum 99,9% filtration efficiency
- Push&Clean™ Semi-automatic filter cleaning system.
- Dust class L certification
- Unique dual filter solution available with HEPA filtration.
- Robust container with steel castors and bumper.
- MultiFit accessory system for the ultimate in task flexibility
- Flexible rubber straps, tool box storage and optional trolley handle for convenient storage and transport
- Optional motor cooling filter, exhaust air collector and Long-Life filter bag

The VHS 40 vacuum cleaner series sets a new standard for design and feature level of the Nilfisk wet & dry vacuum portfolio. With innovative filtration system, improved performance and robust design, this range represents a superior solution for professional customers looking for a safe and reliable machine. VHS 40 comes with more suction power, sealed dust system, automatic filter cleaning and several other user benefits – designed to meet the tough requirements within manufacturing and building and construction industries.





TECHNICAL DATA	VHS 40 L30 PC 220-240V 50/60HZ EU	VHS 40 L40 LC FM IC 220-240V 50/60HZ EU
Airflow rate (I/min.)	4500	4500
Vacuum (mbar/kPa)	250/25	250/25
Power Pmax (W)	1400	1400
Power Piec (W)	1200	1200
Mains connection (V/~/Hz/A)	230/1/50-60/16	230/1/50-60/16
Working sound level (dB(A))	60	60
Container volume (I-max)	30	42
Main filter type	PTFE	PTFE
El cable (m)	7.5	7.5
Filter cleaning system	Push&Clean	InfiniClean
Length x width x height (mm)	565x385x520	565x385x600
Weight (kg)	14.5	16
FEATURES	14.5	10
Softstart	•	•
Anti-static system	•	•
-	•	•
Push&Clean filter cleaning Hose and cable holder		
InfiniClean	•	•
		•
Disposal bag 1 pcs		•
Fleece filter bag 1 pcs.	•	•
STANDARD EQUIPMENT		
FLAT FILTER PTFE M-CLASS 1 PCS	107413540	107413540
CURVED HAND TUBE Ø36MM SS		46691
EXTENSION TUBE Ø36 2X505MM SS	107408074	107408074
TOOL ADAPTER WITH SUCTION REGULATION D32	107409977	
HOSE Ø36X4000 MM AS RED		107413544
UNIV HOSE WITH HAND TUBE D32X3500 CPL.	107409976	
FLOOR NOZZLE Ø36X300MM	302002331	
FLOOR NOZZLE D36X400MM W/D		302003666
CREVICE NOZZLE D36X200	29541	29541
ITEM NO.	107412160	107412165

## VHS 42 M-H - Singlephase for hazardous dusts





### Powerful and safe dust extractor for hazardous dust

- InfiniClean™ Automatic filter cleaning system with minimized performance loss
- PTFE long-life filter with non-stick membrane and minimum 99,9% filtration efficiency
- Push&Clean™ Semi-automatic filter cleaning system on selected models.
- Dust class M and H certification including Asbestos
- Unique dual filter solution available for H-class/ HEPA – including 3-stage filtration
- Flow sensor with combined acoustic and LED warning
- Robust container with steel castors and bumper.
- MultiFit accessory system for the ultimate in task flexibility
- Flexible rubber straps, tool box storage and optional trolley handle for convenient storage and transport
- Optional motor cooling filter, exhaust air collector and Long-Life filter bag

The VHS 42 M/H dust extractor series sets a new standard for design and feature level of the Nilfisk wet & dry vacuum portfolio. With innovative filtration system, improved performance, robust design and dust class M/H certification, this range represents a superior solution for professional customers looking for a reliable machine to protect workers health and safety. VHS 42 M/H comes with more suction power, sealed dust system, automatic filter cleaning and several other user benefits – designed to meet the tough requirements in building & constructions and other industries when picking up hazardous dust.



TECHNICAL DATA	VHS 42 L30 HC PC 220- 240V 50/60HZ EU	VHS 42 L30 MC PC 220- 240V 50/60HZ EU	VHS 42 L40 HC IC 220- 240V 50/60HZ EU	VHS 42 L40 MC IC 220- 240V 50/60HZ EU
Airflow rate (I/min.)	4500	4500	4500	4500
Vacuum (mbar/kPa)	250/25	250/25	250/25	250/25
Power Pmax (W)	1400	1400	1400	1400
Power Piec (W)	1200	1200	1200	1200
Mains connection (V/~/Hz/A)	230/1/50-60/16	230/1/50-60/16	230/1/50-60/16	230/1/50-60/16
Working sound level (dB(A))	60	60	60	60
Container volume (I-max)	30	30	42	42
Main filter type	PTFE/Cellulose H-class	PTFE	PTFE/Cellulose H-class	PTFE
El cable (m)	7.5	7.5	7.5	7.5
Filter cleaning system	Push&Clean	Push&Clean	InfiniClean	InfiniClean
Length x width x height (mm)	565x385x520	565x385x520	565x385x605	565x385x605
Weight (kg)	14.5	14.5	16	16
FEATURES				
Softstart	•	•	•	•
Dual filter system	•		•	
Anti-static system	•	•	•	•
Push&Clean filter cleaning	•	•		
InfiniClean			•	•
Disposal bag 1 pcs				•
Fleece filter bag 1 pcs.		•		•
STANDARD EQUIPMENT				
FLAT FILTER PTFE M-CLASS 1 PCS	107413540	107413540	107413540	107413540
FILTER ELEMENT Ø140X75 H-CLASS/HEPA	107413555		107413555	
CURVED HAND TUBE Ø36MM SS	46691	46691	46691	46691
EXTENSION TUBE Ø36 2X505MM SS	107408074	107408074	107408074	107408074
TOOL ADAPTER D27 QUICKSYSTEM	302000535	302000535	302000535	302000535
HOSE Ø36X4000 MM AS RED	107413544	107413544	107413544	107413544
FLOOR NOZZLE Ø36X300MM	302002331	302002331		
FLOOR NOZZLE D36X400MM W/D			302003666	302003666
CREVICE NOZZLE D36X200	29541	29541	29541	29541
ITEM NO.	107412162	107412161	107412167	107412166

## IVB 961-0L - Industrial Health & Safety Wet & Dry





# A versatile, high-performance unit for demanding day-in/ day-out vacuumings

- Two motor industrial performance
- Washable PET Fleece, big surface filter for high efficiency and low maintenance costs
- Push & Clean filter cleaning system for high efficiency
- Stainless steel tiltable and removable 70 L container for easy handling and disposal
- Complete package with 38 mm accessories with stainless steel tubes and 400 mm wet&dry floor nozzle
- 10 meter cable for a large working radius
- Applicable for wet & dry pick up by reliable floating system
- Robust fleece filter bag standard

Whether it's a factory floor or warehouse loading dock, when spills happen they need to be cleaned quickly and effectively. Apart from the mess, unattended spills can create a hazard that can prove both dangerous and costly.



TECHNICAL DATA	IVB 961-0L
Rated power (W)	2x1200
Inlet (mm)	50 MultiFit
Dust class	L
Container capacity (l)	70
Main filter type	PET
Suction power end of tube (W)	270
Main filter area (cm²)	7800
Length x width x height (mm)	580x600x970
Weight (kg)	30
FEATURES	
Tilting container	•
Anti-static system	•
Wet & dry performance	•
Low working sound level	•
Stainless steel container	•
Push&Clean filter cleaning	•
Fleece filter bag 1 pcs.	•
STANDARD EQUIPMENT	
FILTER ELEMENT D275X187 PET NANO M-CLASS	107400562
UNI. SUCTION HOSE Ø38X4000MM EVA	302002796
CURVED HAND TUBE D38 MM SS	302002889
EXTENSION TUBES R38 2X500 KIT	107402474
FLOOR NOZZLE D38x400 WET AND DRY	302002798
CREVICE NOZZLE Ø38x300 MM PP	302002890
ITEM NO.	302002914

## IVB 965 SD XC - Industrial Health & Safety Wet & Dry







### For heavy-duty industrial cleaining and hazaradous dust collection

- Two motor industrial performance
- XtremeClean fully automatic filter cleaning system for high efficiency also in H class
- Big surface filter for high efficiency and low maintenance costs
- Stainless steel sit down container for easy handling and disposal
- 10 meter cable for a large working radius
- Disposal bag standard
- Socket for automatic on/off (only -2H/M model)

The tougher the cleaning, the better the vacuum cleaner needs to be. This is why so much thought has gone into the design of the IVB 965-21 SD. With 7200 ltr. per minute of air flow, and 3000 W of maximum power, it is capable of fast, productive cleaning of dirt, metal chips and liquid spills.



TECHNICAL DATA	IVB 965-0L	IVB 965-2H/M	
Rated power (W)	2x1200	2x1200	
Inlet (mm)	50 MultiFit	50 MultiFit	
Dust class	L	H/M	
Container capacity (I)	50	50	
Main filter type	PET Nano	Paper/Glass Fibre	
Suction power end of tube (W)	270	270	
Main filter area (cm²)	7800	7800	
Length x width x height (mm)	615x690x990	615x690x990	
Weight (kg)	45	45	
FEATURES			
Anti-static system	•	•	
Motor speed control	•	•	
Low working sound level	•	•	
Washable PET fleece filter	•		
XtremeClean filter cleaning	•	•	
Disposal bag 1 pcs	•	•	
STANDARD EQUIPMENT			
FILTER ELEMENT D275X187 H-CLASS		107400564	
FILTER ELEMENT D275X187 PET NANO M-CLASS	107400562		
DISPOSAL BAG ATTIX 7 5 PCS	302001480	302001480	
SAFETY FILTER BAG H ATTIX 9. 5 PCS		302003473	
ITEM NO.	302002916	302002917	

## IVB 7X - ATEX TYPE 22 - Industrial Health & Safety Wet & Dry







### Approved for healthy- and explosion prof cleaning

- Safety vacuum cleaner for dustclass M ATEX Zone 22 approved
- single phase vacuum cleaner EC drive motor technology, long life / ATEX applications
- SoftStart: A gentle motor startup keeps the starting current low. For easy starting on limited electrical systems Auto On/Off. In combination with powered tools the machine starts and stops automatically when you start or stop the power tool Tilt or LiftOut container emptying.
- The 70 liter stainless steel container can be easily tilted in the frame or lifted off for emptying.

The IVB 7X M class is equipped with the unique EC drive motor system. This ensures long live time and enables use in ATEX zone 22 areas. The IVB 7X is approved according to ATEX directive 94/9/EC for the use in Zone 22.



TECHNICAL DATA	IVB 7-M ATEX TYPE 22
Rated power (W)	1200
Inlet (mm)	50 type 22
Dust class	M
Container capacity (I)	70
Main filter type	PET
Suction power end of tube (W)	270
Main filter area (cm²)	3000
Length x width x height (mm)	580x605x970
Weight (kg)	27.2
FEATURES	
Filter bag	•
Motor speed control	•
Automatic On/Off-elec. tools	•
ATEX hazardous TYPE 22 approval	•
Extra socket for tool	•
STANDARD EQUIPMENT	
FILTER ELEMENT Ø185X140 PET M-CLASS	302000490
HOSE Ø36X4000MM W COUPLING TYPE 22	44193
ITEM NO.	302001895

## IVB 995 ATEX TYPE 22 – Industrial Health & Safety Wet & Dry







# Health&Safety Wet&Dry vacuum cleaners for ATEX Zone 22 explosive dust

- Industrial specifications, robust construction, and powerful... the definition of IVB 9
- Approved for ATEX Zone 22,M andH Class
- 2 Brushless EC (Electronic Controlled) motors
- Two motor Industrial performance
- XtremeClean fully automatic filter cleaning system for high efficiency in H and M Class
- Big surface H Class filter for high efficiency and low maintenance costs
- Stainless Steel SitDown container for perfect handling and disposal
- 10 meter cable for a large working radius
- Disposal and Safety filter bag standard

The IVB 995-0H/M SD XC TYPE 22 is the most powerful two-motorvacuum cleanerthat is approved to be used for both Mand H-Class dust in Zone 22 environments. Featuring XtremeClean filter cleaning and a Stainless Steel SitDown container. The perfect concept for Industrial use where safety is a must.



TECHNICAL DATA	IVB 995 ATEX TYPE 22
Rated power (W)	2x1100
Inlet (mm)	50 Type 22
Dust class	H/M
Container capacity (I)	50
Main filter type	Paper/Glass Fibre
Suction power end of tube (W)	270
Main filter area (cm²)	10000
Length x width x height (mm)	615x690x990
Weight (kg)	45
FEATURES	
Softstart	•
Anti-static system	•
Low working sound level	•
M-class hazardous dust approval	•
H-class hazardous dust approval	•
ATEX hazardous TYPE 22 approval	•
XtremeClean filter cleaning	•
STANDARD EQUIPMENT	
FILTER ELEMENT D275X187 H-CLASS	107400564
MOTOR COOLING AIR FILTER ATTIX9/IVB9	107400041
ITEM NO.	302002919

## **Overview of accessories**



**Fixed floor nozzle** Type 22, Ø50x600 mm



Pipe cleaning nozzle



filter bag sets, 5 pcs.



Safety filter bag, 5 pcs.



MAC/floor kit (38mm) Multi fit rubber hose (38mm)



**Vacuum cleaner kit**For special health and safety applications



**Oven cleaning set** Ø38mm



**Industrial set** Ø50mm



Chip set Ø50mm

## C 100.7 – Compact





### The light entry-level, high-pressure washer that will power up your basic outdoor cleaning

- The lightest Nilfisk.100 bar max pressure.
- Aluminum pump for high durability. Handles mildly dirty surfaces up to 25 m²/ hour.
- Choice of Tornado or Powerspeed (high impact)
- 5m high-pressure hose.
- Click&Clean connectivity for accessories.
- Compact and easy to use, move around and store.

This light, compact and easy to handle Nilfisk highpressure washer is ideal for basic garden cleaning. It offers a maximum pressure of 100 bar - which is enough to be efficient on mildly dirty surfaces.



TECHNICAL DATA	C 100.7-5 - EU
Pump pressure (bar/MPa)	Max 100 / Max 10
Water flow Qmax/Qiec (I/h)	440 / 320
Max. inlet temperature (°C)	40
Rated power (kW)	1.3
Weight (kg)	5.1
Hose length (m)	5
Cable length (m)	5
Length x width x height (cm)	20 x 30 x 46
Voltage/phase/frequency/current (V/~/HZ/A)	220 - 240 / 1~/50 /6.0
FEATURES	
Aluminium pump	•
Lance and spray gun storage	•
Click&Clean (C&C) nozzle concept	•
Gun with quick connection and swivel	•
Automatic start/stop	•
STANDARD EQUIPMENT	
HOSE 5M	126481137
G1 GUN NILFISK	128500908
FOAMSPRAYER WITH BOTTLE	128500077
G2 C&C SPRAY LANCE	128500073
C&C POWERSPEED	128500298
TORNADO G2 TURQUOISE	126481122
ITEM NO.	128470902

## C 110.7/ C 110.7 X-TRA - Compact





# The compact and highly manoeuvarable high pressure washer for basic outdoor cleaning tasks

- 110 bar max pressure. Aluminum pump for high durability.
- Handles mildly dirty surfaces up to 25 m<sup>2</sup>/ hour.
- Choice of Tornado or Powerspeed (high impact) nozzles.
- 5m high-pressure hose.
- Click&Clean connectivity for accessories.
- Compact and easy to use, move around and store.
- The X-TRA model features a built-in trolley for increased mobility.

This light, compact and easy to handle Nilfisk highpressure washer is ideal for basic garden cleaning. It offers a maximum pressure of 110 bar - which is enough to be efficient on light to modarately dirty surfaces.







TECHNICAL DATA	C 110.7-5 EU	C 110.7-5 PC X-TRA EU	C 110.7-5 X-TRA EU
Pump pressure (bar/MPa)	Max 110/ Max 11	Max 110/ Max 11	Max 110/ Max 11
Water flow Qmax/Qiec (I/h)	440 / 310	440 / 310	440 / 310
Max. inlet temperature (°C)	40	40	40
Rated power (kW)	1.4	1.4	1.4
Weight (kg)	6	6	6
Hose length (m)	5	5	5
Cable length (m)	5	5	5
Length x width x height (cm)	26 x 29.5 x 66	26 x 29.5 x 66	26 x 29.5 x 66
Voltage/phase/frequency/current (V/~/HZ/A)	220 - 240 / 1~/ 6.0	220 - 240 / 1~/ 6.0	220 - 240 / 1~/ 6.0
FEATURES			
Trolley		•	•
Aluminium pump	•	•	•
Lance and spray gun storage	•	•	•
Click&Clean (C&C) nozzle concept	•	•	•
Gun with quick connection and swivel	•	•	•
Automatic start/stop	•	•	•
STANDARD EQUIPMENT			
HOSE 5M	126481137	126481137	126481137
G1 GUN NILFISK	128500908	128500908	128500908
FOAMSPRAYER WITH BOTTLE	128500077	128500077	128500077
G2 C&C SPRAY LANCE	128500073	128500073	128500073
COMPACT PATIO		128500700	
TORNADO G2 TURQUOISE	126481122	126481122	126481122
ITEM NO.	128470920	128471000	128470921





# The compact and highly manoeuvarable high pressure washer. With added power for occasional cleaning

- 120 bar max pressure. Aluminum pump for high durability.
- Handles mildly dirty surfaces up to 30 m<sup>2</sup>/ hour.
- Choice of Tornado PR (pressure regulation) or Powerspeed (high impact) nozzles. 6m highpressure hose.
- Click&Clean connectivity for accessories.
- Compact and easy to use, move around and store.
- The X-TRA model features a built-in trolley for increased mobility.

This light, compact and easy to handle Nilfisk highpressure washer is ideal for basic garden cleaning. It offers a maximum pressure of 120 bar - which is enough to be efficient on light to modarately dirty surfaces



Water flow Qmax/Qiec (I/h)         440 / 310           Max. inlet temperature (°C)         40           Rated power (kW)         1.4           Weight (kg)         6.2           Hose length (m)         6           Cable length (m)         5           Length x width x height (cm)         26 x 29.5 x 71           Voltage/phase/frequency/current (V/~/HZ/A)         220 - 240 / 1~ / 50 / 6.2           FEATURES           Tolley           Aluminium pump         •           Lance and spray gun storage         •           Click&Clean (C&C) nozzle concept         •           Gun with quick connection and swivel         •           Automatic start/stop         •           STANDARD EQUIPMENT         *           HOSE 6M         126481138           G1 GUN NILFISK         128500098           FOAMSPRAYER WITH BOTTLE         128500073           G2 C&C SPRAY LANCE         128500073           COMPACT PATIO         *           DRAIN AND TUBE 8M         *           PR TORNADO DARK BLUE         126481120           FIXED BRUSH SHORT NILFISK SP         *	TECHNICAL DATA	C 120.7-6 EU
Water flow Qmax/Qiec (I/h)         440 / 310           Max. inlet temperature (°C)         40           Rated power (kW)         1.4           Weight (kg)         6.2           Hose length (m)         6           Cable length (m)         5           Length x width x height (cm)         26 x 29.5 x 71           Voltage/phase/frequency/current (V/~/HZ/A)         220 - 240 / 1~ / 50 / 6.2           FEATURES           Torlley           Aluminium pump         •           Lance and spray gun storage         •           Click&Clean (C&C) nozzle concept         •           Gun with quick connection and swivel         •           Automatic start/stop         •           STANDARD EQUIPMENT         •           HOSE 6M         126481138           G1 GUN NILFISK         128500098           FOAMSPRAYER WITH BOTTLE         128500073           G2 C&C SPRAY LANCE         128500073           COMPACT PATIO         DRAIN AND TUBE 8M           PR TORNADO DARK BLUE         126481120           FIXED BRUSH SHORT NILFISK SP         126481120		
Max. inlet temperature (°C)         40           Rated power (kW)         1.4           Weight (kg)         6.2           Hose length (m)         6           Cable length (m)         5           Length x width x height (cm)         26 x 29.5 x 71           Voltage/phase/frequency/current (V/~HZ/A)         220 - 240 / 1 ~ / 50 / 6.2           FEATURES           Trolley         •           Aluminium pump         •           Lance and spray gun storage         •           Click&Clean (C&C) nozzle concept         •           Gun with quick connection and swivel         •           Automatic start/stop         •           STANDARD EQUIPMENT         •           HOSE 6M         126481138           G1 GUN NILFISK         128500098           FOAMSPRAYER WITH BOTTLE         128500073           G2 C&C SPRAY LANCE         128500073           COMPACT PATIO         DRAIN AND TUBE 8M           PR TORNADO DARK BLUE         126481120           FIXED BRUSH SHORT NILFISK SP         126481120	Pump pressure (bar/MPa)	Max 120 / Max 12
Rated power (kW)         1.4           Weight (kg)         6.2           Hose length (m)         6           Cable length (m)         5           Length x width x height (cm)         26 x 29.5 x 71           Voltage/phase/frequency/current (V/~/HZ/A)         20 - 240 / 1~ / 50 / 6.2           FEATURES           Trolley         •           Aluminium pump         •           Lance and spray gun storage         •           Click&Clean (C&C) nozzle concept         •           Gun with quick connection and swivel         •           Automatic start/stop         •           STANDARD EQUIPMENT           HOSE 6M         126481138           G1 GUN NILFISK         128500908           FOAMSPRAYER WITH BOTTLE         128500077           G2 C&C SPRAY LANCE         128500073           COMPACT PATIO         DRAIN AND TUBE 8M           PR TORNADO DARK BLUE         126481120           FIXED BRUSH SHORT NILFISK SP         126481120	Water flow Qmax/Qiec (I/h)	440 / 310
Weight (kg)         6.2           Hose length (m)         6           Cable length (m)         5           Length x width x height (cm)         26 x 29.5 x 71           Voltage/phase/frequency/current (V/~/HZ/A)         220 - 240 / 1~ / 50 / 6.2           FEATURES           Trolley           Aluminium pump         •           Lance and spray gun storage         •           Click&Clean (C&C) nozzle concept         •           Gun with quick connection and swivel         •           Automatic start/stop         •           STANDARD EQUIPMENT         •           HOSE 6M         126481138           G1 GUN NILFISK         128500908           FOAMSPRAYER WITH BOTTLE         128500077           G2 C&C SPRAY LANCE         128500073           COMPACT PATIO         DRAIN AND TUBE 8M           PR TORNADO DARK BLUE         126481120           FIXED BRUSH SHORT NILFISK SP         126481120	Max. inlet temperature (°C)	40
Hose length (m)         6           Cable length (m)         5           Length x width x height (cm)         26 x 29.5 x 71           Voltage/phase/frequency/current (V/~/HZ/A)         220 - 240 / 1~/ 50 / 6.2           FEATURES         Trolley	Rated power (kW)	1.4
Cable length (m)       5         Length x width x height (cm)       26 x 29.5 x 71         Voltage/phase/frequency/current (V/~/HZ/A)       220 - 240 / 1~/ 50 / 6.2         FEATURES         Trolley       •         Aluminium pump       •         Lance and spray gun storage       •         Click&Clean (C&C) nozzle concept       •         Gun with quick connection and swivel       •         Automatic start/stop       •         STANDARD EQUIPMENT       •         HOSE 6M       126481138         G1 GUN NILFISK       128500098         FOAMSPRAYER WITH BOTTLE       128500073         G2 C&C SPRAY LANCE       128500073         COMPACT PATIO       DRAIN AND TUBE 8M         PR TORNADO DARK BLUE       126481120         FIXED BRUSH SHORT NILFISK SP       **	Weight (kg)	6.2
Length x width x height (cm)       26 x 29.5 x 71         Voltage/phase/frequency/current (V/~/HZ/A)       220 - 240 / 1~ / 50 / 6.2         FEATURES         Trolley       •         Aluminium pump       •         Lance and spray gun storage       •         Click&Clean (C&C) nozzle concept       •         Gun with quick connection and swivel       •         Automatic start/stop       •         STANDARD EQUIPMENT       •         HOSE 6M       126481138         G1 GUN NILFISK       128500998         FOAMSPRAYER WITH BOTTLE       128500077         G2 C&C SPRAY LANCE       128500073         COMPACT PATIO       DRAIN AND TUBE 8M         PR TORNADO DARK BLUE       126481120         FIXED BRUSH SHORT NILFISK SP       126481120	Hose length (m)	6
Voltage/phase/frequency/current (V/~/HZ/A)         220 - 240 / 1~ / 50 / 6.2           FEATURES         Trolley           Aluminium pump         •           Lance and spray gun storage         •           Click&Clean (C&C) nozzle concept         •           Gun with quick connection and swivel         •           Automatic start/stop         •           STANDARD EQUIPMENT         USE 6M           HOSE 6M         126481138           G1 GUN NILFISK         128500908           FOAMSPRAYER WITH BOTTLE         128500077           G2 C&C SPRAY LANCE         128500073           COMPACT PATIO         DRAIN AND TUBE 8M           PR TORNADO DARK BLUE         126481120           FIXED BRUSH SHORT NILFISK SP         126481120	Cable length (m)	5
FEATURES Trolley •	Length x width x height (cm)	26 x 29.5 x 71
Trolley • Aluminium pump • Lance and spray gun storage • Click&Clean (C&C) nozzle concept • Gun with quick connection and swivel • Automatic start/stop • STANDARD EQUIPMENT USE 6M 126481138 128500908 FOAMSPRAYER WITH BOTTLE 128500077 G2 C&C SPRAY LANCE 128500073 COMPACT PATIO DRAIN AND TUBE 8M PR TORNADO DARK BLUE FIXED BRUSH SHORT NILFISK SP	Voltage/phase/frequency/current (V/~/HZ/A)	220 - 240 / 1~ / 50 / 6.2
Aluminium pump  Lance and spray gun storage  Click&Clean (C&C) nozzle concept  Gun with quick connection and swivel  Automatic start/stop  STANDARD EQUIPMENT  HOSE 6M  G1 GUN NILFISK  126481138  G1 GUN NILFISK  128500908  FOAMSPRAYER WITH BOTTLE  128500077  G2 C&C SPRAY LANCE  COMPACT PATIO  DRAIN AND TUBE 8M  PR TORNADO DARK BLUE  FIXED BRUSH SHORT NILFISK SP	FEATURES	
Lance and spray gun storage Click&Clean (C&C) nozzle concept Gun with quick connection and swivel Automatic start/stop  STANDARD EQUIPMENT HOSE 6M GI GUN NILFISK 128500908 FOAMSPRAYER WITH BOTTLE G2 C&C SPRAY LANCE COMPACT PATIO DRAIN AND TUBE 8M PR TORNADO DARK BLUE FIXED BRUSH SHORT NILFISK SP	Trolley	•
Click&Clean (C&C) nozzle concept Gun with quick connection and swivel Automatic start/stop  STANDARD EQUIPMENT HOSE 6M GI GUN NILFISK 128500908 FOAMSPRAYER WITH BOTTLE 128500077 G2 C&C SPRAY LANCE COMPACT PATIO DRAIN AND TUBE 8M PR TORNADO DARK BLUE FIXED BRUSH SHORT NILFISK SP	Aluminium pump	•
Gun with quick connection and swivel Automatic start/stop  STANDARD EQUIPMENT  HOSE 6M 126481138 G1 GUN NILFISK 128500908 FOAMSPRAYER WITH BOTTLE 128500077 G2 C&C SPRAY LANCE 128500073  COMPACT PATIO DRAIN AND TUBE 8M PR TORNADO DARK BLUE FIXED BRUSH SHORT NILFISK SP	Lance and spray gun storage	•
Automatic start/stop         •           STANDARD EQUIPMENT         126481138           HOSE 6M         126481138           G1 GUN NILFISK         128500908           FOAMSPRAYER WITH BOTTLE         128500077           G2 C&C SPRAY LANCE         128500073           COMPACT PATIO         DRAIN AND TUBE 8M           PR TORNADO DARK BLUE         126481120           FIXED BRUSH SHORT NILFISK SP	Click&Clean (C&C) nozzle concept	•
STANDARD EQUIPMENT         126481138           HOSE 6M         126481138           G1 GUN NILFISK         128500908           FOAMSPRAYER WITH BOTTLE         128500077           G2 C&C SPRAY LANCE         128500073           COMPACT PATIO         DRAIN AND TUBE 8M           PR TORNADO DARK BLUE         126481120           FIXED BRUSH SHORT NILFISK SP         126481120	Gun with quick connection and swivel	•
HOSE 6M 126481138 G1 GUN NILFISK 128500908 FOAMSPRAYER WITH BOTTLE 128500077 G2 C&C SPRAY LANCE 128500073 COMPACT PATIO DRAIN AND TUBE 8M PR TORNADO DARK BLUE 126481120 FIXED BRUSH SHORT NILFISK SP	Automatic start/stop	•
G1 GUN NILFISK 128500908  FOAMSPRAYER WITH BOTTLE 128500077  G2 C&C SPRAY LANCE 128500073  COMPACT PATIO  DRAIN AND TUBE 8M  PR TORNADO DARK BLUE 126481120  FIXED BRUSH SHORT NILFISK SP	STANDARD EQUIPMENT	
FOAMSPRAYER WITH BOTTLE  128500077  G2 C&C SPRAY LANCE  128500073  COMPACT PATIO  DRAIN AND TUBE 8M  PR TORNADO DARK BLUE  FIXED BRUSH SHORT NILFISK SP	HOSE 6M	126481138
G2 C&C SPRAY LANCE 128500073  COMPACT PATIO  DRAIN AND TUBE 8M  PR TORNADO DARK BLUE 126481120  FIXED BRUSH SHORT NILFISK SP	G1 GUN NILFISK	128500908
COMPACT PATIO  DRAIN AND TUBE 8M  PR TORNADO DARK BLUE  FIXED BRUSH SHORT NILFISK SP  126481120	FOAMSPRAYER WITH BOTTLE	128500077
DRAIN AND TUBE 8M  PR TORNADO DARK BLUE  FIXED BRUSH SHORT NILFISK SP  126481120	G2 C&C SPRAY LANCE	128500073
PR TORNADO DARK BLUE 126481120  FIXED BRUSH SHORT NILFISK SP	COMPACT PATIO	
FIXED BRUSH SHORT NILFISK SP	DRAIN AND TUBE 8M	
	PR TORNADO DARK BLUE	126481120
ITEM NO. 128470930	FIXED BRUSH SHORT NILFISK SP	
	ITEM NO.	128470930





#### The handy high pressure washer with plenty of power. The best for basic outdoor cleaning task

- 125 bar max pressure
- Aluminum pump for high durability
- Handles moderate to tough dirt on surfaces up to 30 m2/ hour
- Choice of Tornado PR (pressure regulation) or Powerspeed (high impact) nozzles
- 6m high-pressure hose
- Click&Clean connectivity for accessories
- Compact and easy to use, move around and store
- The X-TRA model features a built-in trolley for increased mobility

The best perfoming model of the compact high pressure washers. It offers a maximum pressure of 125 bar and increased waterflow - ideal for cleaning modarate to tough dirt from surfaces.



Water flow Qmax/Qiec (l/h)         460 / 320           Max. inlet temperature (°C)         40           Rated power (kW)         1.5           Weight (kg)         6.6           Hose length (m)         6           Lable length (m)         5           Length x width x height (cm)         27 x 30 x 82           Voltage/phase/frequency/current (V/~/HZ/A)         220 - 240 / 1 ~ / 50 / 6.4           FEATURES         Froiley           Hose reel         •           Aluminium pump         •           Lick& Clean (C&C) nozzle concept         •           Sun with quick connection and swivel         •           Automatic start/stop         •           STANDARD EQUIPMENT         •           HOSE 6M         126481138           51 GUN NILFISK         128500098           COMASPRAYER WITH BOTTLE         128500073           52 C&C SPRAY LANCE         128500073           COMPACT PATIO         CORPACT PATIO           DRAIN AND TUBE 8M         2.           C&C POWERSPEED         128500298           PR TORNADO DARK BLUE         126481120           EXEX DRIVER SHORT NILFISK SP         126481120	TECHNICAL DATA	C 125.7-6 X-TRA EU
Water flow Qmax/Qiec (l/h)         460 / 320           Max. inlet temperature (°C)         40           Rated power (kW)         1.5           Weight (kg)         6.6           Hose length (m)         6           Lable length (m)         5           Length x width x height (cm)         27 x 30 x 82           Voltage/phase/frequency/current (V/~/HZ/A)         220 - 240 / 1 ~ / 50 / 6.4           FEATURES         Froiley           Hose reel         •           Aluminium pump         •           Lick& Clean (C&C) nozzle concept         •           Sun with quick connection and swivel         •           Automatic start/stop         •           STANDARD EQUIPMENT         •           HOSE 6M         126481138           51 GUN NILFISK         128500098           COMASPRAYER WITH BOTTLE         128500073           52 C&C SPRAY LANCE         128500073           COMPACT PATIO         CORPACT PATIO           DRAIN AND TUBE 8M         2.           C&C POWERSPEED         128500298           PR TORNADO DARK BLUE         126481120           EXEX DRIVER SHORT NILFISK SP         126481120		
Max. inlet temperature (°C) Rated power (kW) 1.5 Role power (kW) 1	Pump pressure (bar/MPa)	Max 125 / Max 12,5
Rated power (kW)   1.5     Meight (kg)   6.6     Gose length (m)   6     Cable length (m)   5     Length x width x height (cm)   27 x 30 x 82     Moltage/phase/frequency/current (V/~/HZ/A)   220 - 240 / 1~ / 50 / 6.4     FEATURES	Water flow Qmax/Qiec (I/h)	460 / 320
Aveight (kg)   6.6	Max. inlet temperature (°C)	40
Cable length (m)   6	Rated power (kW)	1.5
Cable length (m)       5         Length x width x height (cm)       27 x 30 x 82         Voltage/phase/frequency/current (V/~/HZ/A)       220 - 240 / 1~/ 50 / 6.4         FEATURES         Frolley       •         Hose reel       •         Autominium pump       •         Lance and spray gun storage       •         Click&Clean (C&C) nozzle concept       •         Sun with quick connection and swivel       •         Automatic start/stop       •         STSANDARD EQUIPMENT       •         HOSE 6M       126481138         GI GUN NILFISK       128500908         FOAMSPRAYER WITH BOTTLE       128500077         32 C&C SPRAY LANCE       128500073         COMPACT PATIO       ORAIN AND TUBE 8M         CREAD FOWERSPEED       128500298         PAT TORNADO DARK BLUE       126481120         FIXED BRUSH SHORT NILFISK SP       126481120	Weight (kg)	6.6
27 x 30 x 82	Hose length (m)	6
### April	Cable length (m)	5
FEATURES  Frolley	Length x width x height (cm)	27 x 30 x 82
Part	Voltage/phase/frequency/current (V/~/HZ/A)	220 - 240 / 1~ / 50 / 6.4
Aluminium pump Lance and spray gun storage Click&Clean (C&C) nozzle concept Gun with quick connection and swivel Automatic start/stop FTANDARD EQUIPMENT HOSE 6M 126481138 G1 GUN NILFISK 128500908 FOAMSPRAYER WITH BOTTLE 128500077 G2 C&C SPRAY LANCE 128500073 COMPACT PATIO DRAIN AND TUBE 8M C&C POWERSPEED PR TORNADO DARK BLUE EIKED BRUSH SHORT NILFISK SP	FEATURES	
Aluminium pump  ance and spray gun storage  Click&Clean (C&C) nozzle concept  Gun with quick connection and swivel  Automatic start/stop  ESTANDARD EQUIPMENT  HOSE 6M  126481138  GI GUN NILFISK  128500908  COAMSPRAYER WITH BOTTLE  128500077  GZ C&C SPRAY LANCE  128500073  COMPACT PATIO  DRAIN AND TUBE 8M  C&C POWERSPEED  128500298  PR TORNADO DARK BLUE  EIKED BRUSH SHORT NILFISK SP	Trolley	•
Lance and spray gun storage  Click&Clean (C&C) nozzle concept  Gun with quick connection and swivel  Automatic start/stop  ESTANDARD EQUIPMENT  HOSE 6M  126481138  G1 GUN NILFISK  128500908  FOAMSPRAYER WITH BOTTLE  128500077  G2 C&C SPRAY LANCE  COMPACT PATIO  DRAIN AND TUBE 8M  C&C POWERSPEED  128500298  PR TORNADO DARK BLUE  EIXED BRUSH SHORT NILFISK SP	Hose reel	•
Click&Clean (C&C) nozzle concept Gun with quick connection and swivel Automatic start/stop  STANDARD EQUIPMENT HOSE 6M GI 126481138 GI GUN NILFISK FOAMSPRAYER WITH BOTTLE GI 2&500077 GI 2&C &C SPRAY LANCE COMPACT PATIO DRAIN AND TUBE 8M C&C POWERSPEED FOR TORNADO DARK BLUE FIXED BRUSH SHORT NILFISK SP	Aluminium pump	•
## Automatic start/stop ## Aut	Lance and spray gun storage	•
Automatic start/stop  STANDARD EQUIPMENT  HOSE 6M  126481138  G1 GUN NILFISK  128500908  FOAMSPRAYER WITH BOTTLE  128500077  G2 C&C SPRAY LANCE  128500073  COMPACT PATIO  DRAIN AND TUBE 8M  C&C POWERSPEED  PR TORNADO DARK BLUE  EIXED BRUSH SHORT NILFISK SP	Click&Clean (C&C) nozzle concept	•
### TORNADO DARK BLUE  ###################################	Gun with quick connection and swivel	•
126481138 G1 GUN NILFISK G1 GUN NILFISK G2 C&C SPRAY LANCE G2 C&C SPRAY LANCE G2 C&C SPRAY LANCE G2 C&C SPRAY LANCE G3 C&C SPRAY LANCE G4 COMPACT PATIO G5 CALL PATIO G5 C	Automatic start/stop	•
128500908 FOAMSPRAYER WITH BOTTLE 128500077 52 C&C SPRAY LANCE 128500073 COMPACT PATIO DRAIN AND TUBE 8M C&C POWERSPEED PR TORNADO DARK BLUE 126481120 EXECUTE OF THE PARTIC OF THE PART	STANDARD EQUIPMENT	
## TORNADO DARK BLUE ### 126481120 ### 12850077 ### 12850077 ### 12850077 ### 12850077 ### 12850073 ### 12850073 ### 12850073 ### 128500298 ### 128500298 ### 128500298 ### 128500298 ### 128500298 ### 128500298 ### 128500298 ### 128500298 ### 128500298 ### 128500298 ### 128500298 ### 128500298 ### 128500298 ### 128500298 ### 128500298 ### 128500298 ### 128500298 #### 128500298 ### 128500298 #### 128500298 #### 128500298 #### 128500298 #### 128500298 #### 128500298 #### 128500298 #### 128500298 #### 128500298 #### 128500298 ##### 128500298 ##### 128500298 ##### 128500298 ##### 128500298 ####################################	HOSE 6M	126481138
G2 C&C SPRAY LANCE 128500073  COMPACT PATIO  DRAIN AND TUBE 8M  C&C POWERSPEED 128500298  PR TORNADO DARK BLUE 126481120  FIXED BRUSH SHORT NILFISK SP	G1 GUN NILFISK	128500908
COMPACT PATIO  DRAIN AND TUBE 8M  C&C POWERSPEED  PR TORNADO DARK BLUE  EIXED BRUSH SHORT NILFISK SP  128500298  126481120	FOAMSPRAYER WITH BOTTLE	128500077
DRAIN AND TUBE 8M  C&C POWERSPEED  128500298  PR TORNADO DARK BLUE  126481120  FIXED BRUSH SHORT NILFISK SP	G2 C&C SPRAY LANCE	128500073
C&C POWERSPEED 128500298 PR TORNADO DARK BLUE 126481120 FIXED BRUSH SHORT NILFISK SP	COMPACT PATIO	
PR TORNADO DARK BLUE 126481120  FIXED BRUSH SHORT NILFISK SP	DRAIN AND TUBE 8M	
FIXED BRUSH SHORT NILFISK SP	C&C POWERSPEED	128500298
	PR TORNADO DARK BLUE	126481120
TEM NO. 128470951	FIXED BRUSH SHORT NILFISK SP	
	ITEM NO.	128470951







- 125 max pressure Long life metal pump Cleaning speed index: 35
- Automatic start/stop system
- Gentle & Rough nozzles system with user guidance
- Trolley for high mobility
- Click&Clean connectivity for quick and easy change of accessories
- Hose Pocket
- Quick Connect
- 5m Ultraflex hose
- Nozzle user guide

This elegant Nilfisk high pressure washer easily handles your cleaning tasks.





TECHNICAL DATA	Core 125-5 Car wash EU	Core 125-5 Home EU	Core 125-5 PCA EU	Core 125-5 PC EU	Core 125-5 EU
Pump pressure (bar/MPa)	Max 125				
Water flow Qmax/Qiec (I/h)	438/312	438/312	438/312	438/312	438/312
Max. inlet temperature (°C)	40	40	40	40	40
Rated power (kW)	1.4	1.4	1.4	1.4	1.4
Weight (kg)	6.4	6.4	6.4	6.4	6.4
Hose length (m)	5	5	5	5	5
Cable length (m)	5	5	5	5	5
Length x width x height (cm)	71.7 x 29 x 30				
Voltage/phase/frequency/current (V/~/HZ/A)	220 - 240 / 1~/ 50-60 / 5.8				
FEATURES					
Trolley	•	•	•	•	•
Hose reel	•	•	•	•	•
Storage of accessories	•	•	•	•	•
Cable storage	•	•	•	•	•
Gun with quick connection and swivel	•	•	•	•	•
Hose and cable holder	•	•	•	•	•
Pressure regulation in nozzle	•	•	•	•	•
STANDARD EQUIPMENT					
G1 GUN NILFISK	128500908	128500908	128500908	128500908	128500908
POWER SPEED NOZZLE	128501153	128501153	128501153	128501153	128501153
C&C TORNADO PR EXCELLENT	128500303	128500303	128500303	128500303	128500303
FOAMSPRAYER WITH BOTTLE	128500077	128500077	128500077	128500077	128500077
COMPACT PATIO		128500700	128500700	128500700	
ITEM NO.	128471253	128471252	128471251	128471250	128471289







# The powerful and handy high-pressure washer for basic use with powercontrol

- 130 max pressure
- Long life metal pump
- Cleaning speed index: 35
- Automatic start/stop system
- Gentle & Rough nozzles system with user guidance
- Trolley for high mobility
- Click&Clean connectivity for quick and easy change of accessories
- Hose Pocket
- Quick Connect
- 6m Ultraflex hose
- Nozzle user guide
- Power Control

This elegant Nilfisk high pressure washer with power control for adjustable water pressure easily handles your cleaning tasks.



TECHNICAL DATA	Core 130-6 PC - Garden & Carwash		Core 130-6 PC - Car wash EU		Core 130-6 PC - PCA EU	Core 130-6 PC - PC EU	Core 130-6 PC EU
Pump pressure (bar/MPa)	Max 130/max 13	Max 130/max 13	Max 130/max 13	Max 130/max 13	Max 130/max 13	Max 130/max 13	Max 130/max 13
Water flow Qmax/Qiec (I/h)	462 / 324	462 / 324	462 / 324	462 / 324	462 / 324	462 / 324	462 / 324
Max. inlet temperature (°C)	40	40	40	40	40	40	40
Rated power (kW)	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Weight (kg)	6.6	6.6	6.6	6.6	6.6	6.6	6.6
Hose length (m)	6	6	6	6	6	6	6
Cable length (m)	5	5	5	5	5	5	5
Length x width x height (cm)	71.7 x 29 x 30	71.7 x 29 x 30	71.7 x 29 x 30	71.7 x 29 x 30	71.7 x 29 x 30	71.7 x 29 x 30	71.7 x 29 x 30
Voltage/phase/frequency/current (V/~/HZ/A)	220 - 240 / 1~/ 50-60 / 6.5	220 - 240 / 1~/ 50-60 / 6.5	220 - 240 / 1~/ 50-60 / 6.5	220 - 240 / 1~/ 50-60 / 6.5	220 - 240 / 1~/ 50-60 / 6.5	220 - 240 / 1~/ 50-60 / 6.5	220 - 240 / 1~/ 50-60 / 6.5
FEATURES							
Trolley	•	•	•	•	•	•	•
Hose reel	•	•	•	•	•	•	•
Storage of accessories	•	•	•	•	•	•	•
Cable storage	•	•	•	•	•	•	•
Gun with quick connection and swivel	•	•	•	•	•	•	•
Hose and cable holder	•	•	•	•	•	•	•
Pressure regulation in nozzle	•	•	•	•	•	•	•
STANDARD EQUIPMENT							
G1 GUN NILFISK	128500908	128500908	128500908	128500908	128500908	128500908	128500908
POWER SPEED NOZZLE	128501153	128501153	128501153	128501153	128501153	128501153	128501153
C&C TORNADO	128500076	128500076	128500076	128500076	128500076	128500076	128500076
FOAMSPRAYER WITH BOTTLE	128500077	128500077	128500077	128500077	128500077	128500077	128500077
G2 C&C SPRAY LANCE	128500073	128500073	128500073	128500073	128500073	128500073	128500073
ITEM NO.	128471262	128471261	128471260	128471259	128471258	128471257	128471256

### Core 140 - In Hand Powercontrol







# The powerful high-pressure washer with in-hand powercontrol for allround use

- 140 max pressure
- Long life metal pump
- Cleaning speed index: 40
- Automatic start/stop system
- Gentle & Rough nozzles system with user guidance
- Trolley for high mobility
- Click&Clean connectivity for quick and easy change of accessories
- Internal Hose reel
- 8m Ultraflex hose
- Nozzle user guide
- In Hand Power Control

This powerfull Nilfisk high pressure washer with in hand power control for adjustable water pressure while cleaning easily handles your cleaning tasks.



TECHNICAL DATA	Core 140-8 PowerControl IH - Premium car	Core 140-8 PowerControl IH - Car wash EU	Core 140-8 PowerControl IH - PDB EU	Core 140-8 PowerControl IH - PAD EU	Core 140-8 PowerControl IH - Home EU	Core 140-8 PowerControl IH - PCA EU	Core 140-8 PowerControl IH EU		
Pump pressure (bar/MPa)	Max 140/max 14	Max 140/max 14	Max 140/max 14	Max 140/max 14	Max 140/max 14	Max 140 / max 14	Max 140/max 14		
Water flow Qmax/Qiec (I/h)	474/348	474/348	474/348	474/348	474/348	474/348	474/348		
Max. inlet temperature (°C)	40	40	40	40	40	40	40		
Rated power (kW)	1.8	1.8	1.8	1.8	1.8	1.8	1.8		
Weight (kg)	9.2	9.2	9.2	9.2	9.2	9.2	9.2		
Hose length (m)	8	8	8	8	8	8	8		
Cable length (m)	5	5	5	5	5	5	5		
Length x width x height (cm)	88.2 x 37.1 x 30	88.2 x 37.1 x 30	88.2 x 37.1 x 30	88.2 x 37.1 x 30	88.2 x 37.1 x 30	88.2 x 37.1 x 30	88.2 x 37.1 x 30		
Voltage/phase/frequency/current (V/~/HZ/A)	230 - 240 / 1~/ 50-60 / 7	230 - 240 / 1~/ 50-60 / 7	230 - 240 / 1~/ 50-60 / 7	230 - 240 / 1~/ 50-60 / 7	230 - 240 / 1~/ 50-60 / 7	230 - 240 / 1~/ 50-60 / 7	230 - 240 / 1~/ 50-60 / 7		
FEATURES									
Trolley	•	•	•	•	•	•	•		
Hose reel	•	•	•	•	•	•	•		
Storage of accessories	•	•	•	•	•	•	•		
Cable storage	•	•	•	•	•	•	•		
Gun with quick connection and swivel	•	•	•	•	•	•	•		
Hose and cable holder	•	•	•	•	•	•	•		
Pressure regulation in nozzle	•	•	•	•	•	•	•		
STANDARD EQUIPMENT									
POWER SPEED NOZZLE	128501153	128501153	128501153	128501153	128501153	128501153	128501153		
C&C TORNADO	128500076	128500076	128500076	128500076	128500076	128500076	128500076		
FOAMSPRAYER WITH BOTTLE	128500077	128500077	128500077	128500077	128500077	128500077	128500077		
CLEANING TOOL BLACK	6520844	6520844	6520844	6520844	6520844	6520844	6520844		
G3 GUN WITH INTERMEDIATE TUBE	126481132	126481132	126481132	126481132	126481132	126481132	126481132		
G3 LANCE	126481134	126481134	126481134	126481134	126481134	126481134	126481134		
ITEM NO.	128471278	128471277	128471276	128471275	128471274	128471273	128471271		

## Core 140 – power control





# The powerful and easy to handle high-pressure washer for allround use

- 140 max pressure
- Long life metal pump
- Cleaning speed index: 40
- Automatic start/stop system
- Gentle & Rough nozzles system with user guidance
- Trolley for high mobility
- Click&Clean connectivity for quick and easy change of accessories
- Internal Hose reel
- 6m Ultraflex hose
- Nozzle user guide
- Power Control

This powerfull Nilfisk high pressure washer with power control for adjustable water pressure easily handles your cleaning tasks.





TECHNICAL DATA	Core 140-6 Power- Control - Premium car wash	Core 140-6 Powercontrol - Premium carwash	Core 140-6 PowerCon- trol - Car wash EU	Core 140-6 PowerCon- trol - PDB EU	Core 140-6 PowerCon- trol - PAD EU	Core 140-6 PowerCon- trol - Home EU	Core 140-6 PowerCon- trol - PCA EU	Core 140-6 PowerCon- trol EU	
Pump pressure (bar/MPa)	Max 140 / max 14	Max 140 / max 14	Max 140 / max 14	Max 140 / max 14	Max 140 / max 14	Max 140 / max 14	Max 140 / max 14	Max 140 / max 14	
Water flow Qmax/Qiec (I/h)	474 / 348	474 / 348	474 / 348	474 / 348	474 / 348	474 / 348	474 / 348	474 / 348	
Max. inlet temperature (°C)	40	40	40	40	40	40	40	40	
Rated power (kW)	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	
Weight (kg)	8,7	8,7	8,7	8,7	8,7	8,7	8,7	8,7	
Hose length (m)	6	6	6	6	6	6	6	6	
Cable length (m)	5	5	5	5	5	5	5	5	
Length x width x height (cm)	88.2 x 37.1 x 30	88.2 x 37.1 x 30	88.2 x 37.1 x 30	88.2 x 37.1 x 30	88.2 x 37.1 x 30	88.2 x 37.1 x 30	88.2 x 37.1 x 30	88.2 x 37.1 x 30	
Voltage/phase/frequency/current (V/~/HZ/A)	220 - 240 / 1~/ 50-60 / 7	220 - 240 / 1~/ 50-60 / 7	220 - 240 / 1~/ 50-60 / 7	220 - 240 / 1~/ 50-60 / 7	220 - 240 / 1~/ 50-60 / 7	220 - 240 / 1~/ 50-60 / 7	220 - 240 / 1~/ 50-60 / 7	220 - 240 / 1~/ 50-60 / 7	
FEATURES									
Trolley	•	•	•	•	•	•	•	•	
Hose reel	•	•	•	•	•	•	•	•	
Storage of accessories	•	•	•	•	•	•	•	•	
Cable storage	•	•	•	•	•	•	•	•	
Gun with quick connection and swivel	•	•	•	•	•	•	•	•	
Hose and cable holder	•	•	•	•	•	•	•	•	
Pressure regulation in nozzle	•	•	•	•	•	•	•	•	
STANDARD EQUIPMENT									
POWER SPEED NOZZLE	128501153	128501153	128501153	128501153	128501153	128501153	128501153	128501153	
C&C TORNADO	128500076	128500076	128500076	128500076	128500076	128500076	128500076	128500076	
FOAMSPRAYER WITH BOTTLE	128500077	128500077	128500077	128500077	128500077	128500077	128500077	128500077	
CLEANING TOOL BLACK	6520844	6520844	6520844	6520844	6520844	6520844	6520844	6520844	
G3 GUN WITH INTERMEDIATE TUBE	126481132	126481132	126481132	126481132	126481132	126481132	126481132	126481132	
G3 LANCE	126481134	126481134	126481134	126481134	126481134	126481134	126481134	126481134	
ITEM NO.	128471270	128471280	128471269	128471268	128471267	128471266	128471265	128471263	

### Core 150 – power control






# The powerful high-pressure washer with powercontrol for allround use

- 150 bar max pressure
- · Long-life metal pump
- Cleaning speed index: 40
- Automatic start/stop system
- Gentle & Rough nozzle system with user guidance
- Trolley for high mobility
- · Click&Clean connectivity
- 10m ultraflex hose with internal hose reel
- Power control: Adjust pressure with a touch
- Foldable handle and double lance holder for easy storage
- Ultra Torque engine
- Lifting handle

Combining versatility with 150 bar maximum pressure and a host of practical features, including a 10-metre ultraflex hose and long-life metal pump, the Core 150 is a great all-rounder designed to take the stress out of daily cleaning.

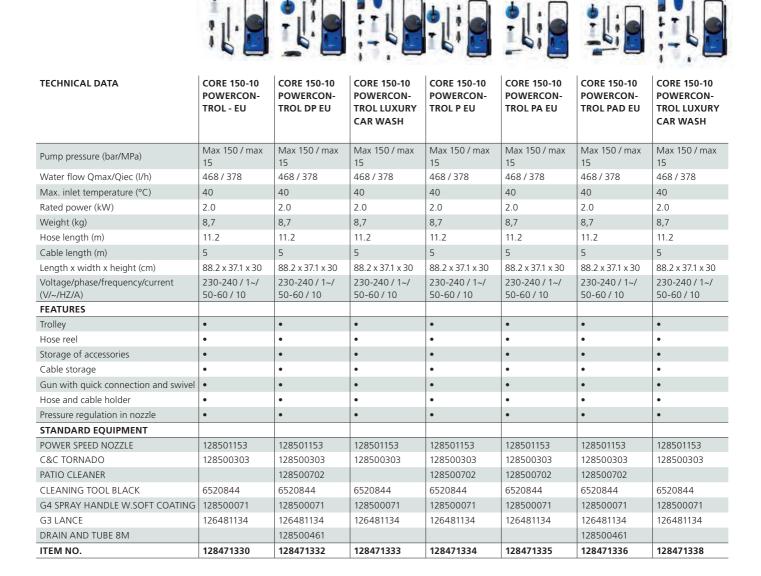





# The powerful, long-life, low-noise high-pressure washer. Ideal for frequent or larger cleaning tasks

- 145 bar, max pressure
- Sturdy built with aluminum pump and long-life induction motor.
- Automatic start/ stop system
- 9m soft hose or 10 steelarmed hose
- One-hand operated hose reel
- Telescopic handle with sturdy and robust aluminum tubes
- Rubber suspension ensures a lower noise when working
- Easy storage of gun, lance, nozzles and foam sprayer onboard
- Click&Clean nozzle system ensures quick and easy change of nozzle.
- The X-TRA model features a built-in trolley for increased mobility.
- Can be used as stationary machine with optional wall hook

This powerful Nilfisk with long-life induction motor easily handles larger and frequent cleaning tasks.









TECHNICAL DATA	E 145.4-9 PA X-TRA EU	E 145.4-9 POWER X-TRA EU	E 145.4-9 P X-TRA EU	E 145.4-9 X-TRA EU
Pump pressure (bar/MPa)	Max 145/ max 14.5	Max 145/ max 14.5	Max 145/ max 14.5	Max 145/ max 14.5
Water flow Qmax/Qiec (I/h)	500/ 420	500/ 420	500/ 420	500/ 420
Max. inlet temperature (°C)	40	40	40	40
Rated power (kW)	2.1	2.1	2.1	2.1
Weight (kg)	18.6	18.6	18.6	18.6
Hose length (m)	9	9	9	9
Cable length (m)	5	5	5	5
Length x width x height (cm)	39.5 x 34.5 x 90	39.5 x 34.5 x 90	39.5 x 34.5 x 90	39.5 x 34.5 x 90
Voltage/phase/frequency/current (V/~/HZ/A)	230 - 240 / 1~ / 50 / 9.5	230 - 240 / 1~ / 50 / 9.5	230 - 240 / 1~ / 50 / 9.5	230 - 240 / 1~ / 50 / 9.5
STANDARD EQUIPMENT				
HOSE TEXTILE SOFT 9M FOR MODEL	128500654	128500654	128500654	128500654
FOAMSPRAYER WITH BOTTLE	128500077	128500077	128500077	128500077
G4 SPRAY HANDLE W.SOFT COATING	128500071	128500071	128500071	128500071
PATIO CLEANER	128500702		128500702	
NILFISK POWER PATIO		128500955		
G4 NOZZLE TUBE SHORT	128500676	128500676	128500676	128500676
TORNADO CC 4 DOTS DARK BLUE	128500854	128500854	128500854	128500854
POWER SPEED NOZZLE	128501153	128501153	128501153	128501153
ROTARY BRUSH	126411395			
ITEM NO.	128471189	128471193	128471187	128471185







# The powerful, long-life, high-pressure washer. With long hose range for larger cleaning tasks

- 150 bar, max pressure.
- Sturdy built with alluminum pump and long-life induction motor.
- Automatic start/ stop system.
- 10m reinforced steelarmed hose for wider coverage and long life or 9m soft hose
- One-hand operated hose reel
- Telescopic handle with sturdy and robust aluminum tubes.
- Rubber suspension ensures a lower noise when working
- Easy storage of gun, lance, nozzles and foam sprayer onboard.
- Convenient storage of electric cable.
- Click&Clean nozzle system ensures quick and easy change of nozzle.
- The X-TRA model features a built-in trolley for increased mobility.
- Can be used as a stationary machine with optional wall hook.

This powerful Nilfisk easily handles larger and frequent cleaning tasks.



TECHNICAL DATA	E 150.2-10 PH X-TRA EU
Pump pressure (bar/MPa)	Max 150/ max 15
Water flow Qmax/Qiec (I/h)	500/400
Max. inlet temperature (°C)	40
Rated power (kW)	2.1
Weight (kg)	19.8
Hose length (m)	10
Cable length (m)	5
Length x width x height (cm)	39.5 x 34.5 x 87.5
Voltage/phase/frequency/current (V/~/HZ/A)	230 - 240 / 1~ / 50 / 10
STANDARD EQUIPMENT	
HOSE STEEL ARMED 10M FOR MODEL	128500656
FOAMSPRAYER WITH BOTTLE	128500077
CLEANING TOOL BLACK	6520844
G4 SPRAY HANDLE W.SOFT COATING	128500071
PATIO CLEANER	128500702
G4 NOZZLE TUBE SHORT	128500676
PR TORNADO RED2 LINES CLICK	128500657
POWER SPEED NOZZLE	128501153
ITEM NO.	128471202







# The very powerful, long-life, low-noise high-pressure washer. With long hose range for larger cleaning tasks

- 160 bar, max pressure
- Sturdy build with aluminum pump and long-life induction motor
- Automatic start/ stop system
- 10m reinforced steelarmed hose and one-hand operated hose reel
- Telescopic handle with sturdy handle and aluminum tubes
- Rubber suspension ensures a lower noise when working
- Easy storage of gun, lance, nozzles and foam sprayer onboard
- Convenient storage of electric cable
- Click&Clean nozzle system ensures quick and easy change of nozzle.
- The X-TRA model features a built-in trolley for increased mobility.
- Can be used as stationary machine with optional wall book

This very powerful Nilfisk easily handles larger and frequent cleaning tasks.



### TECHNICAL DATA EU

Pump pressure (bar/MPa)	Max 160/ max 16
Water flow Qmax/Qiec (l/h)	500 / 410
Max. inlet temperature (°C)	40
Rated power (kW)	2.3
Weight (kg)	20.6
Hose length (m)	10
Cable length (m)	5
Length x width x height (cm)	39.5 x 34.5 x 90
Voltage/phase/frequency/current (V/~/HZ/A)	230 240 / 1~ /50 / 10.5
STANDARD EQUIPMENT	
G4 NOZZLE TUBE	128500669
HOSE STEEL ARMED 10M FOR MODEL	128500656
FOAMSPRAYER WITH BOTTLE	128500077
CLEANING TOOL BLACK	6520844
G5 SPRAY HANDLE	128500072
PATIO CLEANER	128500702
DRAIN AND TUBE 8M	128500461
PR TORNADO RED2 LINES CLICK	128500657
POWER SPEED NOZZLE	128501153
ROTARY BRUSH	126411395
ITEM NO.	128471198





# The semi-professional pressure washer for powerful outdoor cleaning

- 180 max pressure
- Metal pump with induction motor and alloy cylinder head for high durability.
- Handles all tasks on surfaces up to 60 m2/ hour.
- Excellent mobility on all types of surfaces with builtin trolley and large wheels.
- 10m superflex high-pressure hose.
- Covenient accessory storage in the machine.
- Easy storage of electric cable.
- Built-in detergent dosage-function and regulation.
- Long lance and telescopic handle supports good working positions.
- X-TRA model includes trolley and hose reel.

This sturdy and robust pressure washer satisfies all frequent and large cleaning tasks.

It is built for durability with a long lasting induction motor and brass cylinder heads.

It offers good ergonomics and a large range of operation with its 10m steel armed hose.



TECHNICAL DATA	PREMIUM 180-10 EU
Pump pressure (bar/MPa)	Max 180 / Max 18
Water flow Qmax/Qiec (I/h)	610 / 540
Max. inlet temperature (°C)	60
Rated power (kW)	2.9
Weight (kg)	26.8
Hose length (m)	10
Cable length (m)	5
Length x width x height (cm)	39 x 38 x 95.5
Voltage/phase/frequency/current (V/~/Hz/A)	230 / 1~ / 50 / 12.6
FEATURES	
Trolley	•
Detergent tank	•
Hose reel	•
Cable storage	•
Pressure regulation	•
Superflex (steel armed) hose	•
Telescopic handle	•
STANDARD EQUIPMENT	
10M SUPERFLEX HOSE	128500082
G5 SPRAY LANCE	128500075
CLEANING TOOL BLACK	6520844
G5 SPRAY HANDLE	128500072
ITEM NO.	128471147





# The top-of-range high pressure washer for powerful outdoor cleaning

- 190 max pressure
- Metal pump with induction motor and brass cylinder head for high durability
- Handles all tasks on surfaces up to 60 m2/ hour
- Fully flexible pressure regulation
- Excellent mobility on all types of surfaces with builtin trolley and large wheels
- Covenient accessory storage and hose reel
- Easy storage of electric cable
- Built-in detergent dosage-function and regulation
- Long lance and telescopic handle supports good working positions
- 12 m steel armed high pressure hose enhances flexibility.

This top-of-line premium quality high-pressure washer satisfies all frequent and large cleaning tasks.







TECHNICAL DATA	PREMIUM 190-12 EU	PREMIUM 190-12 POWER EU	PREMIUM PLUS 190-15 EU
Pump pressure (bar/MPa)	Max 190 / Max 19	Max 190 / Max 19	Max 190 / Max 19
Water flow Qmax/Qiec (I/h)	650 / 570	650 / 570	650 / 570
Max. inlet temperature (°C)	60	60	60
Rated power (kW)	3.3	3.3	3.3
Weight (kg)	30,2	30,2	29,9
Hose length (m)	12	12	15
Cable length (m)	5	5	5
Length x width x height (cm)	39 x 38 x 95.5	39 x 38 x 95.5	39 x 38 x 95.5
Voltage/phase/frequency/current (V/~/Hz/A)	230 / 1~ / 50 / 12.6	230 / 1~ / 50 / 12.6	230 / 1~ / 50 / 12.6
FEATURES			
Trolley	•	•	•
Detergent tank	•	•	•
Hose reel	•	•	•
Cable storage	•	•	•
Pressure regulation	•	•	•
Superflex (steel armed) hose	•	•	•
Telescopic handle	•	•	•
STANDARD EQUIPMENT			
G5 SPRAY LANCE	128500075	128500075	128500075
CLEANING TOOL BLACK	6520844	6520844	6520844
G5 SPRAY HANDLE	128500072	128500072	128500072
NILFISK POWER PATIO		128500955	
HOSE SUPERFLEX 15M			128500084
ITEM NO.	128471153	128471149	128471150





#### The top-of-range high pressure washer for powerful outdoor cleaning

- 200 bar max pressure
- Metal pump with induction motor and aluminium cylinder head for high durability
- Cleans surfaces up to 70 m2/ hour
- Fully flexible pressure regulation
- Excellent mobility on all types of surfaces with in-built trolley and large wheels
- Convenient accessory and hose reel storage plus easy storage of electric cable
- In-built detergent dosage function and regulation
- Long lance and telescopic handle
- 12m steel-armed high pressure hose enhances flexibility
- Large foam sprayer

Breeze through larger, tougher cleans with the Premium 200, the largest in the range and the most powerful. With an incredibly forceful 200 bar maximum pressure and 12m steel-armed hose, you're guaranteed professional-style results every time.








TECHNICAL DATA	PREMIUM 200-15 EU	PREMIUM 200-15 EU - GARDEN	PREMIUM 200-15 EU - CAR WASH
Pump pressure (bar/MPa)	Max 200 / Max 20	Max 200 / Max 20	Max 200 / Max 20
Water flow Qmax/Qiec (l/h)	650 / 570	650 / 570	650 / 570
Max. inlet temperature (°C)	60	60	60
Rated power (kW)	3.3	3.3	3.3
Weight (kg)	30,2	30,2	30,2
Hose length (m)	15	15	15
Cable length (m)	5	5	5
Length x width x height (cm)	39 x 38 x 95.5	39 x 38 x 95.5	39 x 38 x 95.5
Voltage/phase/frequency/current (V/~/Hz/A)	230 / 1~ / 50 / 14.5	230 / 1~ / 50 / 14.5	230 / 1~ / 50 / 14.5
FEATURES			
Trolley	•	•	•
Detergent tank	•	•	•
Hose reel	•	•	•
Cable storage	•	•	•
Pressure regulation	•	•	•
Superflex (steel armed) hose	•	•	•
Telescopic handle	•	•	•
STANDARD EQUIPMENT			
BIKE & AUTO NOZZLE WITH BAYONET			128501468
AUTO BRUSH WITH BAYONET			128501466
CLEANING TOOL BLACK	6520844	6520844	6520844
G5 SPRAY HANDLE	128500072	128500072	128500072
G5 SPRAY LANCE	128500075	128500075	128500075
PREMIUM ROUGH NOZZLE	128501202	128501202	128501202
PREMIUM GENTLE NOZZLE	128501203	128501203	128501203
HOSE SUPERFLEX 15M	128500084	128500084	128500084
NILFISK POWER PATIO		128500955	
SUPER FOAM SPRAYER W BAYONET	128501465	128501465	128501465
UNDER CARRIAGE NOZZLE WITH BAYONET			128501467
ITEM NO.	128471362	128471368	128471369

	C 100 7-5 - 611	C 110 7-5 EU	C 110.7-5 PC X-TRA EU	C 110.7-5 X-TRA EU	C 120.7-6 EU	C 120.7-6 PCAD EU	C 125.7-6 PCAD X-TRA EU	C 125.7-6 PC X-TRA EU	C 125.7-6 X-TRA EU	C135.1-8 EU	C 135.1-8 HOME EU	C 135.1-8 PC EU	G-PG 135.1-8 PAD X-TRA EU	G-PG 135.1-8 P X-TRA EU	G-PG 135.1-8 X-TRA EU	C 135.1-6i PAD X-TRA EU	C 135.1-81 Y-TRA EU	D-PG 140.4-9 X-TRA EU	D 140.4-9 DP X-TRA EU	D 140.4-9 X-TRA EU	E 150.2-10 PH X-TRA EU	E 145.4-9 PA X-TRA EU	E 145.4-9 POWER X-TRA EU	E 145.4-9 P X-TRA EU	E 145.4-9 X-TRA EU	E 160.1-10 PADH X-TRA EU	P 150.2-10 X-TRA EU	P160.2-12 X-TRA EU	Item no.
Hose and Connection 8M STANDARD HOSE										• (	• •	•					•				•		•						12850
														•		<u>.</u>					•		•						
10M SUPERFLEX HOSE											·····												•				•		12850
•						•															•	•	•						
EXT. HOSE 7 M - QUICK COUPLING	c	0	0	0	0	0	0	0	0	0 (	0 0	0	0	0	0	0	o c	0	0	0	•		•		•		•		1064
																							•		-				
Extension Hose	C	0	0	0	0	0	0	0	0													<b>.</b>			•		•		64
EXTENSION HOSE STEEL ARMED 7 M		. ^		0				0	٥.														•				0		64
EATENSION HOSE STEEL ARRIVED / IVI		, .																							-		-		04
HOSE 5M			•	•						·····•													•						1264
														•							•				•		•		
HOSE 6M					•	•	•	•	•							•											-		1264
						•				·····•	<u>+</u>			•		<b>.</b>			···•		•	<b>-</b>	•				<b></b>	<b>.</b>	
NILFISK BA VALVE COMP. GARDENA		0	0	0	0	0	0	0	0	0 (	0 0	0	0	0	0	0	o c	0	0	0	0	0	0	0	0		0	0	106
								<u>-</u>		<u>.</u>		<u>.</u>	<u>.</u>						<u>-</u>										
HOSE TEXTILE SOFT 9M FOR MODEL																		•	•	•		•	•	•	•		-		1285
																					•		•						
G1 GUN NILFISK	•		•	•	•	•	•	•	•	<u>-</u>		_	<u>.</u>	-		<u>-</u>			···•										1285
LOSS COST DNC OMMITTE TUDGAD																							•						4200
HOSE SOFT DN6 8M WITH THREAD																													1285
G4 NOZZLE TUBE													<u>.</u>													•			1285
										······•											•		•		-				
HOSE STEEL ARMED 10M FOR MODEL						•						•		•		·····					•		•		•	•	•		1285
												_							_		_		-		-		-		
Accessory	••••	•••	• • • •	•••	••••	• • • •	••••	• • • •	• • •	• • • •	••••	•••	•••	•••	••••	• • • •	•••	• • • •	• • •	•••	• • •	• • •	• • •	• • •	• • •	•••	•••	• • • • •	•••••
G4 POWERGRIP SPRAY HANDLE						•				·····•		•••	•	•	•	• · · · · · · • · ·		•	···•		•		•		•		•		1285
G5 SPRAY LANCE																					-	-	-		-		-	•	1285
																											-		.203
FOAMSPRAYER WITH BOTTLE		•	•	•	•	•	•	•	•	• •	• •	•	•	•	•	•	• •	•	•	•	•	•	•	•	•	•			1285
																					•		•				•		
CLEANING TOOL BLACK			0	0		0		0	0	• '	• •	•	•	•	•			•	•	•	•					•	•	•	65
DRAIN AND TUBE CLEANER ALTO		) (	0	C	C	C	C	0	0	0 4	0 0	0	C	0	C	0	2 (	) (	0	C	C	0	C	C	0	0	0	0	64
										-																		-	

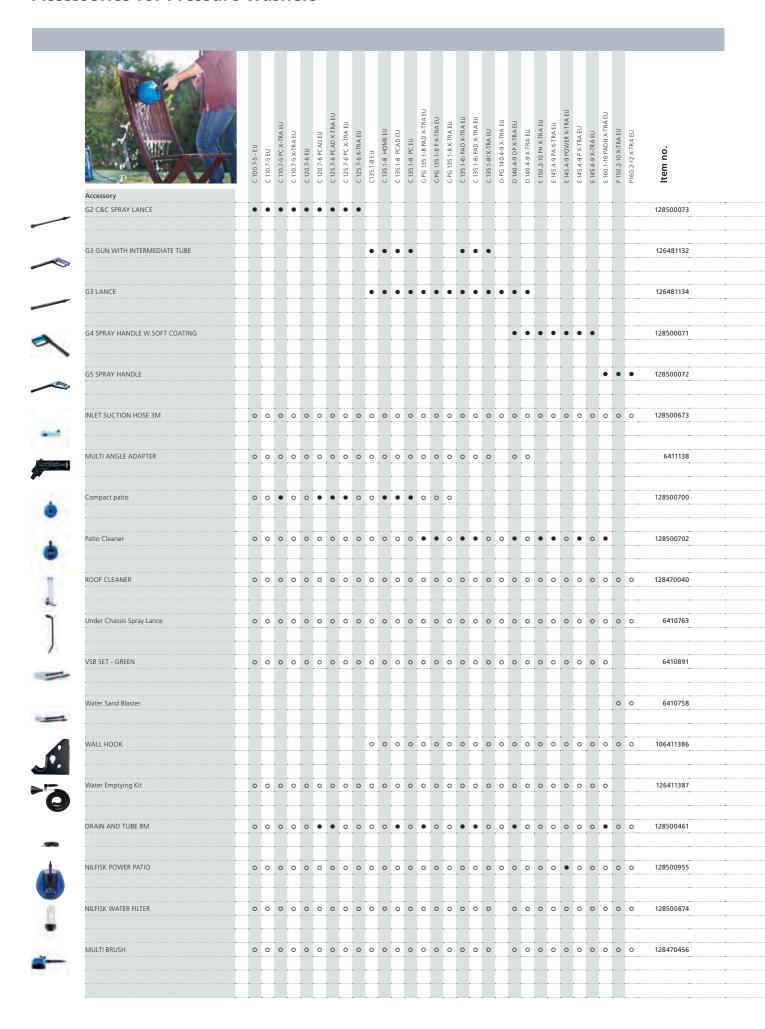

Standard accessories
 Supplementary accessories
 Supplementary and mountable accessories

	Accessory		C 100.7-5 - EU	C 110.7-5 EU	C 110.7-5 PC X-TRA EU	C 110.7-5 X-TRA EU	C 120.7-6 EU	C 120.7-6 PCAD EU	C 125.7-6 PCAD X-TRA EU	C 125.7-6 PC X-TRA EU	C 125.7-6 X-TRA EU	C135.1-8 EU	C 135.1-8 HOME EU C 135.1-8 PCAD EU	C 135.1-8 PC EU	C-PG 135.1-8 PAD X-TRA EU	G-PG 135.1-8 P X-TRA EU	C-PG 135.1-8 X-TRA EU	C 135.1-6i PAD X-TRA EU	C 135.1-8i PAD X-TRA EU	C 135.1-8I X-TRA EU	D-PG 140.4-9 X-TRA EU	D 140.4-9 DP X-TRA EU	D 140.4-9 X-TRA EU	E 150.2-10 PH X-TRA EU	E 145.4-9 PA X-TRA EU	E 145.4-9 POWER X-TRA EU	E 145.4-9 P X-TRA EU	E 145.4-9 X-TRA EU	E 160.1-10 PADH X-TRA EU	P 150.2-10 X-TRA EU	P160.2-12 X-TRA EU	Item no.
<b>.</b>	NILFISK C&C SUPER FOAM SPRAYER		0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			128500938
					• • • • • • • • • • • • • • • • • • • •															····		····								•		
	G4 NOZZLE TUBE SHORT											<b>-</b>								·····				•	•	•	•	•				128500676
	Nazzla High Program Wishan				• • •											• • • •		• • • •												• • • •		
1	Nozzle - High Pressure Washer Wide Angled Auto & Cycle Nozzle		0	0	0	0	0	0	0	0	0	0 (	0 0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			6411136
l.												<b>.</b>				···•				<b>.</b>											<b>.</b>	
llen.	NOZZLE C&C TORNADO G2 YELLOW				********										•	•	•	•			······•									•		126481114
	•									······•		·····•											·······•		·······•					•		
	POWER SPEED																													•	•	128500079
					**********																		······									
	PR TORNADO YELLOW			•	•					·····•		• (	• •	•											······					•		126481116
					•													•		-	······································			-								
	PR TORNADO DARK BLUE	•		<b></b>	•		•	•	•	•	•	<b>-</b>								<u>-</u>	<b>.</b>	•	•							•		126481120
	PR TORNADO RED2 LINES CLICK																				<b>.</b>			•					•	•		128500657
																																.20300037
_	PR TORNADO TURQUOISE			<b></b>	•							·····•				···•		•	•	•	<b>.</b>		·····		·····					•	•	126481118
																																_
,	TORNADO G2 TURQUOISE		•	•	•	•							-							-												126481122
	-			•				<u>-</u>		<b>.</b>		<b>-</b>	····•			···•			<u>-</u>		<b>.</b>		<u>.</u>		<u>.</u>							
	TORNADO PR				•					······•		·····•		···•		···•		•					······		······					•	•	128500078
9					•					·····-		<b>-</b>	····•	···•		•••					<u>-</u>	····										
	Under Chassis Nozzle		0	0	0	0	0	0	0	0	0	0 (	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			6411135
	TORNADO CC 4 DOTS DARK BLUE				•					·····•		<b>-</b>		•		•					•		·····		•	•	•	•				128500854
																																420504452
	POWER SPEED NOZZLE				•							• (	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			128501153
	Brush		· · · •		• • •		· · · ·		· · · •		<b>.</b>	<b>.</b> .		• • •		• • •		• • • •		٠	<b>.</b>	<b>.</b>		٠		٠				• • •		· · · · · · · · · · · · · · · · · · ·
	Auto brush		0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			6411131
	-				•					·····•		·····•				•••		•				····	······		······					•		
	Car brush head		0	0	0	0	0	0	0	0	0	0 (	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	128500463
	•																															_
	Garden brush head		0	0	0	0	0	0	٥.	0	٥.	0 (	0 0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	128470457
																																_
	RIM BRUSH HEAD		0	0	0	0	0	0	0	0	0	0 0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		0	0	128470458
																					······		······		· · · · · · · · · · · ·				·			

	Brush	113 3 2001 0	C 110,7-5 EU	C 110.7-5 PC X-TRA EU	C 110.7-5 X-TRA EU	C 120.7-6 EU	C 120.7-6 PCAD EU	C 125.7-6 PC AU X-1KA EU	C 125.7-6 X-TRA EU	C135.1-8 EU	C 135.1-8 HOME EU	C 135.1-8 PCAD EU	C 135.1-8 PC EU	C-PG 135.1-8 PAD X-TRA EU	G-PG 135.1-8 P-X-TRA EU G-PG 135.1-8 X-TRA EU	C 135.1-6i PAD X-TRA EU	C 135.1-8! PAD X-TRA EU	C 135.1-81 X-TRA EU	D-PG 140.4-9 X-TRA EU	D 140.4-9 DP X-TRA EU	D 140.4-9 X-TRA EU	E 150.2-10 PH X-TRA EU	E 145.4-9 PA X-TRA EU	E 145,4-9 POWER X-TRA EU	E 145.4-9 P X-TRA EU	E 145.4-9 X-TRA EU	E 160.1-10 PADH X-TRA EU	P 150.2-10 X-TRA EU	P160.2-12 X-TRA EU	Item no.	
-	ROTARY BRUSH		0	0	0	0 (	0 (	0	0	0	0	0	0 (	0 1	0 0	0	0	0	0	0	0 1	0	0	0	0	0	0	0	0	6410762	
	ROTARY BRUSH	(	0	0	0	0 (	0 (	o o	0	0	0	0	0 (	0 1	0 0	0	0	0	0	0	0 1	0	•	0	0	0	•	0	0	126411395	
	WASHING BRUSH																											0	0	6410765	
	FIXED BRUSH SHORT NILFISK SP	(	0	0	0	0 (	• •	• 0	0	0	•	•	0 (	• •	0 0	•	•	0	0	0	0 1	0	0	0	0	0	0			128500685	
	Accessory Kit			• • •	• • • •	· · · ·		• • •		••••	• • • •	• • •		• • •		• · ·	• • • •	•	• • •	• • •		• • •	• • •	• • •		• • •			• • • •	••••••••	 •••••
	MULTI BRUSH KIT	(	0	0	0	0 (	0 (	0	0	0	0	0	0 (	0	0 0	0	0	0	0	0	0 1	0	0	0	0	0	0	0	0	128470459	
	O-RING KIT CONSUMER HPW	(	0	0	0	0 (	0 (	o 0	0	0	0	0	0 (	0 1	0 0	. 0	0	0	0	0	0 1	0	0	0	0	0	0	0	0	128500292	
-																															

## Nilfisk Buddy II 12 – Wet & dry vacuum cleaners







#### - a good choice for Vacuum cleaner no 2

- 1200 watt motor will pick up any debris you want to get rid of.
- The Blow function provides you with another option for cleaning.
- Two big wheels at the back and two rotation wheels in front make the machine very stable and easy to move around.
- The standard wet filter protects the turbine and ensures a long lifetime.
- The built-in accessory holder provides storage for your accessories so that they are always at hand.
- Ergonomic grip ensures that the machines is in balance when you carry it around. The grip is shaped so that you can place the tube on top when having a break.

The Nilfisk Buddy II 12 is a small, lightweight, yet powerful helper for picking up Wet & Dry debris... for your home, car, workshop, hobbies and even for outside cleaning.



TECHNICAL DATA	NILFISK BUDDY II 12 EU
Cable length (m)	4
Weight (kg)	4.4
Vacuum tube diameter (mm)	36
Hose length (m)	1.9
Length x width x height (cm)	36 x 33 x 44
Vacuum (mbar/kPa)	200/20
Power Pmax (W)	1200
Power Piec (W)	1000
Mains connection (V/~/Hz/A)	220-240/ 1~/ 50/60
Container volume (I-max)	12
Max. suction power (W)	250
Plug for electric tools (W)	No
Sound level lpa/lwa (dB(A))	87/74
FEATURES	
Compact design	•
Wet & dry performance	•
Suction control on hand tube	•
Storage of accessories	•
Blow function	•
STANDARD EQUIPMENT	
CREVICE NOZZLE D36X200	29541
FILTER KIT FOR BUDDY II	81943047
TUBE WITH PARKING CLIPS	31000862
WET & DRY NOZZLE KIT	81943049
ITEM NO.	18451119

## Nilfisk Buddy II 18 – Wet & dry vacuum cleaners








#### 18 liter wet and dry vacuum cleaner for private households

- The light weight makes it handy to work with.
- 18 liter version with robust Polypropylene container.
- 1200 watt motor will pick up any debris you want to get rid of.
- The Blow function provides you with another option for cleaning.
- Two big wheels at the back and two rotation wheels in front make the machine very stable and easy to move around.
- The standard wet filter protects your turbine for a long lifetime.
- The built in accessory holder provides storage for your accessories so they are always at hand.
- Ergonomic grip so you will have a balanced machine when you carry it around. The grip is shaped so you can place the tube on top when having a break.





TECHNICAL DATA	NILFISK BUDDY II 18 EU
Cable length (m)	4
Weight (kg)	4.9
Vacuum tube diameter (mm)	36
Hose length (m)	1.9
Length x width x height (cm)	36 x 33 x 53
Vacuum (mbar/kPa)	200/20
Power Pmax (W)	1200
Power Piec (W)	1000
Mains connection (V/~/Hz/A)	220-240/ 1~/ 50/60
Container volume (I-max)	18
Max. suction power (W)	250
Plug for electric tools (W)	No
Sound level lpa/lwa (dB(A))	87/74
FEATURES	
Compact design	•
Wet & dry performance	•
Suction control on hand tube	•
Storage of accessories	•
Blow function	•
STANDARD EQUIPMENT	
CREVICE NOZZLE D36X200	29541
FILTER KIT FOR BUDDY II	81943047
TUBE WITH PARKING CLIPS	31000862
WET & DRY NOZZLE KIT	81943049
ITEM NO.	18451124

## Nilfisk Buddy II 18 Inox – Wet & dry vacuum cleaners







TECHNICAL DATA

#### Perfect helper for picking up wet & dry debris

- The Nilfisk Buddy II 18 Inox is a robust machine build for rough cleaning.
- 1200 watt motor will pick up any debris you want to get rid of.
- The Blow function provides you with another option for cleaning.
- Two big wheels at the back and two rotation wheels in front make the machine very stable and easy to move around.
- The standard wet filter protects your turbine for a long lifetime.
- The built in accessory holder provides storage for your accessories so they are always at hand.
- Ergonomic grip so you will have a balanced machine when you carry it around. The grip is shaped so you can place the tube on top when having a break.

The Nilfisk Buddy II Inox is a small, lightweight, yet powerful wet and dry vacuum cleaner... for your home, car, workshop and hobbies.

This second generation of Nilfisk Buddy comes with a 18 liters stainless steel container making the machine very robust



NULFICK BURDY II 40 INOV FU

Max. suction power (W)         250           Plug for electric tools (W)         No           Sound level lpa/lwa (dB(A))         87/74           FEATURES         -           Compact design         •           Wet & dry performance         •           Suction control on hand tube         •           Storage of accessories         •           Blow function         •           Steel container         •           STANDARD EQUIPMENT         -           CREVICE NOZZLE D36X200         29541           FILTER KIT FOR BUDDY II         81943047           TUBE WITH PARKING CLIPS         31000862           WET & DRY NOZZLE KIT         81943049	TECHNICAL DATA	NILFISK BUDDY II 18 INOX EU
Weight (kg)         5.6           Vacuur tube diameter (mm)         36           Hose length (m)         1.9           Length x width x height (cm)         40 x 35 x 55           Dimensions (k x W x H) (mm)         400x350x550           Vacuum (mbar/kPa)         200/20           Power Pmax (W)         1200           Power Piec (W)         1000           Mains connection (VI~Hz/A)         220-240/ 1-/ 50/60           Container volume (I-max)         18           Max. suction power (W)         250           Plug for electric tools (W)         No           Sound level Ipa/lwa (dB/A))         87/74           FEATURES         ***           Compact design         •           Wet & dry performance         •           Suction control on hand tube         •           Storage of accessories         •           Blow function         •           Steel container         •           TADARD EQUIPMENT         **           CREVICE NOZZLE D36X200         29541           FILTER KIT FOR BUDDY II         81943047           TUBE WITH PARKING CLIPS         31000862           WET & DRY NOZZLE KIT         81943049	Cable length (m)	4
Vacuum tube diameter (mm)         36           Hose length (m)         1.9           Length x width x height (cm)         40 x 35 x 55           Dimensions (Lx W x H) (mm)         400x350x550           Vacuum (mbar/kPa)         200/20           Power Pmax (W)         1200           Power Piec (W)         1000           Mains connection (V/~/Hz/A)         220-240/ 1-/ 50/60           Container volume (I-max)         18           Max. suction power (W)         250           Plug for electric tools (W)         No           Sound level lpa/lwa (dB(A))         87/74           FEATURES         Compact design           Wet & dry performance         •           Suction control on hand tube         •           Storage of accessories         •           Blow function         •           Steel container         •           STANDARD EQUIPMENT         CREVICE NOZZLE D36X200           EILTER KIT FOR BUDDY II         81943047           TUBE WITH PARKING CLIPS         31000862           WET & DRY NOZZLE KIT         81943049	9	
Hose length (m)   1.9     Length x width x height (cm)   40 x 35 x 55     Dimensions (L x W x H) (mm)   400x350x550     Vacuum (mbar/kPa)   200/20     Power Pmax (W)   1200     Power Piec (W)   1000     Mains connection (V/-/Hz/A)   220-240/ 1-/ 50/60     Container volume (I-max)   18     Max. suction power (W)   250     Plug for electric tools (W)   No     Sound level  pa/lwa (dB(A))   87/74     FEATURES	<u> </u>	
Length x width x height (cm)         40 x 35 x 55           Dimensions (L x W x H) (mm)         400x350x550           Vacuum (mbar/kPa)         200/20           Power Pmax (W)         1200           Power Piec (W)         1000           Mains connection (V/~/Hz/A)         220-240/1~/ 50/60           Container volume (I-max)         18           Max. suction power (W)         250           Plug for electric tools (W)         No           Sound level [pa/lwa (dB(A))         87/74           FEATURES         Compact design           Wet & dry performance         •           Suction control on hand tube         •           Storage of accessories         •           Blow function         •           Steel container         •           STANDARD EQUIPMENT         CREVICE NOZZLE D36X200           FILTER KIT FOR BUDDY II         81943047           TUBE WITH PARKING CLIPS         31000862           WET & DRY NOZZLE KIT         81943049	, ,	
Dimensions (L x W x H) (mm)         400x350x550           Vacuum (mbar/kPa)         200/20           Power Pmax (W)         1200           Power Piec (W)         1000           Mains connection (V/~/Hz/A)         220-240/ 1~/ 50/60           Container volume (I-max)         18           Max. suction power (W)         250           Plug for electric tools (W)         No           Sound level Ipa/lwa (dB(A))         87/74           FEATURES         -           Compact design         •           Wet & dry performance         •           Suction control on hand tube         •           Storage of accessories         •           Blow function         •           Steel container         •           STANDARD EQUIPMENT         CREVICE NOZZLE D36X200           FILTER KIT FOR BUDDY II         81943047           TUBE WITH PARKING CLIPS         31000862           WET & DRY NOZZLE KIT         81943049		
Vacuum (mbar/kPa)         200/20           Power Pmax (W)         1200           Power Piec (W)         1000           Mains connection (V/~/Hz/A)         220-240/ 1~/ 50/60           Container volume (I-max)         18           Max. suction power (W)         250           Plug for electric tools (W)         No           Sound level Ipa/lwa (dB(A))         87/74           FEATURES         -           Compact design         •           Wet & dry performance         •           Suction control on hand tube         •           Storage of accessories         •           Blow function         •           Steel container         •           STANDARD EQUIPMENT         CREVICE NOZZLE D36X200           FILTER KIT FOR BUDDY II         81943047           TUBE WITH PARKING CLIPS         31000862           WET & DRY NOZZLE KIT         81943049	-	
Power Pmax (W)         1200           Power Piec (W)         1000           Mains connection (V/~/Hz/A)         220-240/ 1~/ 50/60           Container volume (I-max)         18           Max. suction power (W)         250           Plug for electric tools (W)         No           Sound level Ipa/Iwa (dB(A))         87/74           FEATURES	, , , ,	
Power Piec (W)         1000           Mains connection (W-/Hz/A)         220-240/ 1-/ 50/60           Container volume (I-max)         18           Max. suction power (W)         250           Plug for electric tools (W)         No           Sound level Ipa/Iwa (dB(A))         87/74           FEATURES         Compact design           Wet & dry performance         •           Suction control on hand tube         •           Storage of accessories         •           Blow function         •           Steel container         •           Steel container         •           STANDARD EQUIPMENT         CREVICE NOZZLE D36X200           FILTER KIT FOR BUDDY II         81943047           TUBE WITH PARKING CLIPS         31000862           WET & DRY NOZZLE KIT         81943049		
Mains connection (V/-/Hz/A)       220-240/ 1-/ 50/60         Container volume (I-max)       18         Max. suction power (W)       250         Plug for electric tools (W)       No         Sound level Ipa/Iwa (dB(A))       87/74         FEATURES         Compact design       •         Wet & dry performance       •         Suction control on hand tube       •         Storage of accessories       •         Blow function       •         Steel container       •         STANDARD EQUIPMENT       •         CREVICE NOZZLE D36X200       29541         FILTER KIT FOR BUDDY II       81943047         TUBE WITH PARKING CLIPS       31000862         WET & DRY NOZZLE KIT       81943049	,	
Max. suction power (W)         250           Plug for electric tools (W)         No           Sound level lpa/lwa (dB(A))         87/74           FEATURES         -           Compact design         •           Wet & dry performance         •           Suction control on hand tube         •           Storage of accessories         •           Blow function         •           Steel container         •           STANDARD EQUIPMENT         -           CREVICE NOZZLE D36X200         29541           FILTER KIT FOR BUDDY II         81943047           TUBE WITH PARKING CLIPS         31000862           WET & DRY NOZZLE KIT         81943049	Mains connection (V/~/Hz/A)	220-240/ 1~/ 50/60
Plug for electric tools (W)         No           Sound level lpa/lwa (dB(A))         87/74           FEATURES         Compact design           Wet & dry performance         •           Suction control on hand tube         •           Storage of accessories         •           Blow function         •           Steel container         •           STANDARD EQUIPMENT         CREVICE NOZZLE D36X200           FILTER KIT FOR BUDDY II         81943047           TUBE WITH PARKING CLIPS         31000862           WET & DRY NOZZLE KIT         81943049	Container volume (I-max)	18
Sound level lpa/lwa (dB(A))         87/74           FEATURES	Max. suction power (W)	250
FEATURES  Compact design  Wet & dry performance Suction control on hand tube Storage of accessories Blow function Steel container  STANDARD EQUIPMENT  CREVICE NOZZLE D36X200 FILTER KIT FOR BUDDY II TUBE WITH PARKING CLIPS WET & DRY NOZZLE KIT  81943049	Plug for electric tools (W)	No
Compact design  Wet & dry performance  Suction control on hand tube  Storage of accessories  Blow function  Steel container  STANDARD EQUIPMENT  CREVICE NOZZLE D36X200  FILTER KIT FOR BUDDY II  TUBE WITH PARKING CLIPS  WET & DRY NOZZLE KIT  81943049	Sound level lpa/lwa (dB(A))	87/74
Wet & dry performance Suction control on hand tube Storage of accessories Blow function Steel container  STANDARD EQUIPMENT  CREVICE NOZZLE D36X200 FILTER KIT FOR BUDDY II TUBE WITH PARKING CLIPS WET & DRY NOZZLE KIT SIGNAGE SIGNA	FEATURES	
Suction control on hand tube  Storage of accessories  Blow function  Steel container  STANDARD EQUIPMENT  CREVICE NOZZLE D36X200  FILTER KIT FOR BUDDY II  TUBE WITH PARKING CLIPS  WET & DRY NOZZLE KIT  81943049	Compact design	•
Storage of accessories         •           Blow function         •           Steel container         •           STANDARD EQUIPMENT           CREVICE NOZZLE D36X200         29541           FILTER KIT FOR BUDDY II         81943047           TUBE WITH PARKING CLIPS         31000862           WET & DRY NOZZLE KIT         81943049	Wet & dry performance	•
Blow function         •           Steel container         •           STANDARD EQUIPMENT         •           CREVICE NOZZLE D36X200         29541           FILTER KIT FOR BUDDY II         81943047           TUBE WITH PARKING CLIPS         31000862           WET & DRY NOZZLE KIT         81943049	Suction control on hand tube	•
Steel container         •           STANDARD EQUIPMENT         CREVICE NOZZLE D36X200           FILTER KIT FOR BUDDY II         81943047           TUBE WITH PARKING CLIPS         31000862           WET & DRY NOZZLE KIT         81943049	Storage of accessories	•
STANDARD EQUIPMENT         CREVICE NOZZLE D36X200           CREVICE NOZZLE D36X200         29541           FILTER KIT FOR BUDDY II         81943047           TUBE WITH PARKING CLIPS         31000862           WET & DRY NOZZLE KIT         81943049	Blow function	•
CREVICE NOZZLE D36X200         29541           FILTER KIT FOR BUDDY II         81943047           TUBE WITH PARKING CLIPS         31000862           WET & DRY NOZZLE KIT         81943049	Steel container	•
FILTER KIT FOR BUDDY II         81943047           TUBE WITH PARKING CLIPS         31000862           WET & DRY NOZZLE KIT         81943049	STANDARD EQUIPMENT	
TUBE WITH PARKING CLIPS 31000862 WET & DRY NOZZLE KIT 81943049	CREVICE NOZZLE D36X200	29541
WET & DRY NOZZLE KIT 81943049	FILTER KIT FOR BUDDY II	81943047
	TUBE WITH PARKING CLIPS	31000862
ITEM NO. 18451129	WET & DRY NOZZLE KIT	81943049
	ITEM NO.	18451129

### Nilfisk Buddy II 18 T – Wet & dry vacuum cleaners





# Lightweight and compact wet and dry vacuum cleaner with electrical outlet for power tool

- The Nilfisk Buddy II 18 T makes it handy working with power tools and removing dust and dirt in the same process.
- Attach your power cord to the machine and connect the suction hose to your power tool with the included power tool adapter.
- 1200 watt motor will pick up any debris you want to get rid of.
- The Blow function provides you with another option for cleaning - perfect for e.g. an inflatable boat
- Two big wheels at the back and two rotation wheels in front make the machine very stable and easy to move around.
- The standard wet filter protects your turbine for a long lifetime.
- The built in accessory holder provides storage for your accessories so they are always at hand.
- Ergonomic grip so you will have a balanced machine when you carry it around. The grip is shaped so you can place the tube on top when having a break.

The Nilfisk Buddy II is a powerful helper for picking up Wet & Dry debris... for your home, car, workshop and hobbies.

This second generation of household wet and dry vacuum cleaners come with an 18 liters container and is equipped with an electrical power outlet to connect your power tool.



TECHNICAL DATA	NILFISK BUDDY II 18 T EU
Cable length (m)	6
Weight (kg)	5.5
Vacuum tube diameter (mm)	36
Hose length (m)	4
Length x width x height (cm)	36 x 33 x 53
Dimensions (L x W x H) (mm)	360x330x530
Vacuum (mbar/kPa)	200/20
Power Pmax (W)	1200
Power Piec (W)	1000
Mains connection (V/~/Hz/A)	220-240/ 1~/ 50/60
Container volume (I-max)	18
Max. suction power (W)	250
Plug for electric tools (W)	Yes - 1100
Sound level lpa/lwa (dB(A))	87/74
FEATURES	
Compact design	•
Wet & dry performance	•
MultiFit accessory system	•
Suction control on hand tube	•
Storage of accessories	•
Blow function	•
STANDARD EQUIPMENT	
CREVICE NOZZLE D36X200	29541
FILTER KIT FOR BUDDY II	81943047
TUBE WITH PARKING CLIPS	31000862
WET & DRY NOZZLE KIT	81943049
ITEM NO.	18451134

## Multi II 22 – Wet & dry vacuum cleaners





#### - a versatile wet & dry vacuum cleaner in a compact design

- Filter clean indicator for continued high performance
- Sturdy build with a robust 1200 W engine for long life
- High suction power for efficient cleaning
- Blow function provides another option for cleaning
- 22 I container with good net filling capacity
- Polypropylene container for easy cleaning

The Multi II is a good companion to the "Do it yourself" person in any house.

It is also a good second vacuum cleaner dedicated to dirt and debris inside as well as outside the house.





TECHNICAL DATA	NILFISK MULTI II 22 EU	NILFISK MULTI II 22 INOX EU
Vacuum (kPa)	200/20	200/20
Cable length (m)	5	5
Weight (kg)	7.85	9.20
Vacuum tube diameter (mm)	36	36
Hose length (m)	2.2	2.2
Length x width x height (cm)	40 x 36.5 x 56.4	42.6 x 37.4 x 59.9
Power Pmax (W)	1200	1200
Power Piec (W)	1130	1130
Mains connection (V/~/Hz/A)	220-240/ 1~/ 50/60	220-240/ 1~/ 50/60
Container volume (I-max)	22	22
Max. suction power (W)	270	270
Plug for electric tools (W)	No	No
Sound level lpa/lwa (dB(A))	85/72	85/72
FEATURES		
Wet & dry performance	•	•
Push&Clean filter cleaning		•
Automatic On/Off-elec. tools		
Variable speed control		
Blow function	•	•
Steel container		•
Filter Clean Indicator	•	•
STANDARD EQUIPMENT		
CREVICE NOZZLE D36X200	29541	29541
FILTER KIT 1 PCS	107417194	107417194
TUBE WITH PARKING CLIPS	31000862	
SUCTION HOSE 2.5M 1 PCS	107417192	107417192
FLOOR NOZZLE D36 W/D 1 PCS	107417197	107417197
ITEM NO.	18451550	18451551

## Multi II 30 T – Wet & dry vacuum cleaners





#### - a powerful and versatile wet & dry vacuum cleaner

- Filter clean indicator for continued performance
- Push&Clean, a semi-automatic filter cleaning function
- Sturdy build with a robust 1400 W engine for long life
- High suction power for efficient cleaning
- Blow function for optional cleaning
- 30 I container with good net filling capacity
- Polypropylene container for easy cleaning
- Variable Suction control and Inox container offered as a variant
- Soft start by attached powertool

The Multi II is a good companion to the Do it yourself person in any house. It is also a good second vacuum cleaner dedicated to dirt and debris inside as well as outside the house, car or the like.





TECHNICAL DATA	MULTI II 30 T INOX VSC EU	NILFISK MULTI II 30 T EU
Vacuum (kPa)	210/21	210/21
Cable length (m)	5	5
Weight (kg)	10.50	9.60
Vacuum tube diameter (mm)	36	36
Hose length (m)	4	4
Length x width x height (cm)	42.6 x 37.4 x 68.4	42.6 x 37.4 x 68.4
Power Pmax (W)	1400	1400
Power Piec (W)	1260	1260
Mains connection (V/~/Hz/A)	220-240/ 1~/ 50/60	220-240/ 1~/ 50/60
Container volume (I-max)	30	30
Max. suction power (W)	292	292
Plug for electric tools (W)	Yes, 1100	Yes, 1100
Sound level lpa/lwa (dB(A))	87/74	87/74
FEATURES		
Softstart	•	•
Push&Clean filter cleaning	•	•
Automatic On/Off-elec. tools	•	•
Variable speed control	•	
Blow function	•	•
Steel container	•	
Filter Clean Indicator	•	•
STANDARD EQUIPMENT		
CREVICE NOZZLE D36X200	29541	29541
FILTER KIT 1 PCS	107417194	107417194
SUCTION HOSE 4M 1 PCS	107417193	107417193
FLOOR NOZZLE D36 W/D 1 PCS	107417197	107417197
ITEM NO.	18451553	18451552

## **Accessories for Vacuum cleaners**

	System 36 Brush/Haburral Maryla	NILFEK BUDDY II 12 EU	NILFEK BUDDY II 18 EU	NILFEK BUDDY II 18 INOX EU	NILFEK BUDDY II 18 T EU	NILFEK MULTI II 22 EU	NILFEK MULTI II 22 INOX EU	MULTI II 30 T INOX VS.C. EU	NILFEK MULTI I 30 T EU <b>Item no.</b>
1	System 36 Brush/Universal Nozzle SUCTION BRUSH D36 BLACK	0	0	0	0	0	0	0	O 302002509
1	UNIVERSAL NOZZLE D36X115	0	0	0	0	0	0	0	o 14295
7	System 36 Vac Floor Nozzie COMBI NOZZLE Ø36X260MM	0	0	0	0	0	0	0	O 302002365
٦	FLOOR NOZZLE D36x300MM W/D KIT	0	0	0	0	0	0	0	o 107402706
4	SUCTION NOZZLE WATER Ø36 300MM	0	0	0	0	0	0	0	O 63992
	System 36 Crevice/Cone Nozzle CREVICE NOZZLE D36X200			•			•		• 29541
	System 36 Tube EXTENSION TUBE D36 2X500MM ALU	0	0		0	0	0	0	o 107400032
-	EXTENSION TUBE D36 2X515MM PLASTIC	0	0	0	0	0	0	0	O 40696
	TELESCOPIC TUBE Ø36X550-970 SS	0	0	0	0	0	0	0	O 47109
	Dust Bag and Filter DUST BAG 4 PCS FOR BUDDY II	0	0	0	0				81943048
	FILTER KIT FOR BUDDY II	•	•	•	•				81943047
ub66	DUST BAG FLEECE 22L/30L 4 PCS					0	0	0	0 107417195
0	FILTER KIT 1 PCS					•	•	•	• 107417194
16	Accessory TUBE WITH PARKING CLIPS	•	•	•	•		0	0	O 31000862
<b>(4)</b>	Accessory Kit BLOW NOZZLE KIT	0	0		0	0	0		o 107402483
47	WALL DRILL KIT	0	0	0	0	0	0	0	O 107402478
-									
	WET & DRY NOZZLE KIT	•	•	•	•				81943049

<sup>●</sup> Standard accessories
O Supplementary accessories
□ Supplementary and mountable accessories

## **Accessories for Vacuum cleaners**

		NILFSK BUDDY II 12 EU	NILFISK BUDDY II 18 EU	NILFISK BUDDY II 18 INOX EU	NILFISK BUDDY II 18 T EU	NILFISK MULTI II 22 EU	NILFISK MULTI II 22 INOX EU	MULTI II 30 T INOX VS.C.EU	NILFISK MULTI II 30 T EU	ltem no.
	Accessory Kit CONVENIENCE KIT-TOPBOX	0		. 0		. 0	. 0	. 0	0	107417191
* *			-				-	•		
22	PREMIUM CAR KIT-TOPBOX	0	0	0	0	0	0	0	0	107417190
1				•		•		•		***************************************
	Hose and Connection	• • • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • • •	• · · · · · · · · · · ·		• • • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • • •	•••••
	SUCTION HOSE 2.5M 1 PCS	0	0	0	0	•	•	0	0	107417192
7										•
	SUCTION HOSE 4M 1 PCS	0	0	0	0	. 0	0	•	•	107417193
9				•				•		
<b>.</b>	Nozzle - Vacuum	•••••		• • • • • • • • • • • • • • • • • • • •		• • • • • • • • • • • • • • • • • • • •		• • • • • • • • • • • • • • • • • • • •		• • • • • • • • • • • • • • • • • • • •

<sup>●</sup> Standard accessories
O Supplementary accessories
U Supplementary and mountable accessories

### Nilfisk Supreme All-in-1 150/250/LCD - Central vacuum cleaners







# All-in-1 Central Vacuum Cleaners – clear air, low noise, high suction power

- Can be used with or without a bag
- Dust container with cyclone system
- Low working sound
- The build in sack filter is self-cleaning through the movement when the central units starts / stops
- The central unit is equipped with start stop function
- Build in soft start system
- Soft grib on bend end for user convenience
- Manual hose kit (depending on model): The central unit starts with the hose is connected to wall inlet and stops when removed
- Wireless+ hose kit (depending on model) Wireless operation of central unit: Start/stop at handle, regulation through 5-speed / suction power levels, LED display returns with information on a) Empty dust bag, b) Blocked airflow c) Other issues that needs service
- Deluxe wireless hose kit (depending on model) wireless operation of central unit: Start/stop at handle, regulation through 5-speed / suction power levels, LCD info display with information on a a) Empty dust bag, b) Blocked airflow c) Issues that needs service d) Overheat indicator symbols if the power has become overheated. E) Signal indicator. Flashes if the bend end is out of reach from the central unit f) Battery level of bend end.

Vacuum cleaning the easy way a central vacuum cleaner does just that. It is extremely quiet, odour free, lightweight and handy, turning a repetitive domestic chore into an agreeable easy-to-do job. With the central power unit (combined motor and dust container) stowed away on the loft, in the basement, or in some remote location where it bothers no one, it is out of the way, and the only thing you need to carry around when vacuuming is the hose itself. A clever precaution against asthma, eczema and other allergies as all dust pick up is directed out of the rooms through the sealed tubes.

The 'All-in-1' boxes from Nilfisk contain everything you need for installation of a central vacuum cleaner in old houses as in new-build.



TECHNICAL DATA	NILFISK ALL-IN-1 SUPREME 150 DELUXE EU	NILFISK ALL-IN-1 SUPREME 150 MAN EU	NILFISK ALL-IN-1 SUPREME 150 WIRELESS+EU	NILFISK ALL-IN-1 SUPREME 150 WIRELESS+EU	NILFISK ALL-IN-1 SUPREME 250 DELUXE EU	NILFISK ALL-IN SUPREME 250 MAN EU
Rated power (W)	1350	1350	1350	1350	1700	1700
Vacuum (kPa)	30	30	30	30	32	32
Weight (kg)	6,5	6,5	6,5	6,5	6,5	6,5
Container capacity (I)	25	25	25	25	25	25
Dust bag capacity (I)	20	20	20	20	20	20
Suction power motor (W)	650	650	650	650	712	712
Height (cm)	80	80	80	80	80	80
Sound level	66	66	66	66	66	66
Width with handle (cm)	37	37	37	37	37	37
Airflow (l/sec.) measured at central unit	57	57	57	57	58	58
(,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	40	40	40	40	40	40
Depth w./ bracket (cm)						
Fuse circuit (A)	10	10	10	10	10	10
Maximum house size (m²)	150	150	150	150	250	250
Longest pipe line (m)	30	30	30	30	50	50
FEATURES						
Bag-full indicator	•		•	•	•	
Airflow sensor	•				•	
Filter Clean Indicator	•				•	
Speed indicator	•		•	•	•	
Handle w. wireless infocenter	•				•	
Wireless on/off on handle	•		•	•	•	
Wireless remote control	•		•	•	•	
STANDARD EQUIPMENT						
BAG FILTER	140 8514 500	140 8514 500	140 8514 500	140 8514 500	140 8514 500	140 8514 500
DUST BAGS SMALL CV	107401158	107401158	107401158	107401158	107401158	107401158
NILFISK CV HOSEKIT DELUXE 9M EU 433MHZ	107405106				107405106	
NILFISK CV HOSEKIT MANUAL 9M		107405104				107405104
NILFISK CV HOSEKIT WIRELESS 9M EU 433MHZ			107405105			
NILFISK CV HOSEKIT WIRELESS 12M EU433MHZ				107405108		
NILFISK NEW TELESCOPIC TUBE	107408043	107408043	107408043	107408043	107408043	107408043
NILFISK NEW BRUSH NOZZLE	107408040	107408040	107408040	107408040	107408040	107408040
NILFISK NEW COMBI NOZZLE	107408042	107408042	107408042	107408042	107408042	107408042
CREVICE NOZZLE	107408039	107408039	107408039	107408039	107408039	107408039
NILFISK NEW UPHOLSTERY NOZZLE	107408041	107408041	107408041	107408041	107408041	107408041
3 INLET FITTINGS AND PIPES KIT	42000202	42000202	42000202	42000202	42000202	42000202
ITEM NO.	42000502	42000500	42000501	42000514	42000505	42000503

### Nilfisk Supreme All-in-1 150/250/LCD - Central vacuum cleaners







## All-in-1 Central Vacuum Cleaners – clear air, low noise, high suction power

- Can be used with or without a bag
- Dust container with cyclone system
- Low working sound
- The build in sack filter is self-cleaning through the movement when the central units starts / stops
- The central unit is equipped with start stop function
- Build in soft start system
- Soft grib on bend end for user convenience
- Manual hose kit (depending on model): The central unit starts with the hose is connected to wall inlet and stops when removed
- Wireless+ hose kit (depending on model) Wireless operation of central unit: Start/stop at handle, regulation through 5-speed / suction power levels, LED display returns with information on a) Empty dust bag, b) Blocked airflow c) Other issues that needs service
- Deluxe wireless hose kit (depending on model) wireless operation of central unit: Start/stop at handle, regulation through 5-speed / suction power levels, LCD info display with information on a a) Empty dust bag, b) Blocked airflow c) Issues that needs service d) Overheat indicator symbols if the power has become overheated. E) Signal indicator. Flashes if the bend end is out of reach from the central unit f) Battery level of bend end.

Vacuum cleaning the easy way a central vacuum cleaner does just that. It is extremely quiet, odour free, lightweight and handy, turning a repetitive domestic chore into an agreeable easy-to-do job. With the central power unit (combined motor and dust container) stowed away on the loft, in the basement, or in some remote location where it bothers no one, it is out of the way, and the only thing you need to carry around when vacuuming is the hose itself. A clever precaution against asthma, eczema and other allergies as all dust pick up is directed out of the rooms through the sealed tubes.

The 'All-in-1' boxes from Nilfisk contain everything you need for installation of a central vacuum cleaner in old houses as in new-build.



TECHNICAL DATA	NILFISK ALL-IN-1 SUPREME 250 WIRELESS+EU	NILFISK ALL-IN-1 SUPREME 250 WIRELESS+EU	NILFISK ALL-IN-1 SUPREME LCD DE- LUXE EU	NILFISK ALL-IN-1 SUPREME LCD DE- LUXE EU	NILFISK ALL-IN-1 SUPREME LCD WIRELESS+EU
Rated power (W)	1700	1700	1700	1700	1700
Vacuum (kPa)	32	32	33	33	33
Weight (kg)	6,5	6,5	6,5	6,5	6,5
Container capacity (I)	25	25	25	25	25
Dust bag capacity (I)	20	20	20	20	20
Suction power motor (W)	712	712	727	727	727
Height (cm)	80	80	80	80	80
Sound level	66	66	66	66	66
Width with handle (cm)	37	37	37	37	37
Airflow (l/sec.) measured at central unit	58	58	60	60	60
Depth w./ bracket (cm)	40	40	40	40	40
1 ,					
Fuse circuit (A)	10	10	10	10	10
Maximum house size (m²)	250	250	500	500	500
Longest pipe line (m)	50	50	70	70	70
FEATURES					
Bag-full indicator	•	•	•	•	•
Airflow sensor			•	•	
Filter Clean Indicator			•	•	
Speed indicator	•	•	•	•	•
Handle w. wireless infocenter			•	•	
Wireless on/off on handle	•	•	•	•	•
Wireless remote control	•	•	•	•	•
STANDARD EQUIPMENT					
BAG FILTER	140 8514 500	140 8514 500	140 8514 500	140 8514 500	140 8514 500
DUST BAGS SMALL CV	107401158	107401158	107401158	107401158	107401158
NILFISK CV HOSEKIT DELUXE 9M EU 433MHZ			107405106		
NILFISK CV HOSEKIT DELUXE 12M EU 433MHZ				107405109	
NILFISK CV HOSEKIT WIRELESS 9M EU 433MHZ	107405105	107405105			107405105
NILFISK NEW TELESCOPIC TUBE	107408043	107408043	107408043	107408043	107408043
NILFISK NEW BRUSH NOZZLE	107408040	107408040	107408040	107408040	107408040
NILFISK NEW COMBI NOZZLE	107408042	107408042	107408042	107408042	107408042
CREVICE NOZZLE	107408039	107408039	107408039	107408039	107408039
NILFISK NEW UPHOLSTERY NOZZLE	107408041	107408041	107408041	107408041	107408041
3 INLET FITTINGS AND PIPES KIT	42000202	42000202	42000202	42000202	42000202
ITEM NO.	42000504	42000515	42000507	42000516	42000506

### Nilfisk Supreme 100 - Central vacuum cleaners





#### For apartments and small houses up to 100 sqm

- Can be used with or without a bag
- Dust container with cyclone system
- Low working sound
- The central unit is equipped with start/stop function
- Build in soft start system
- The build in sack filter is self-cleaning through the movement when the central units starts / stops

Vacuum cleaning the easy way.

A central vacuum cleaner does just that. It is extremely quiet, odour free, lightweight and handy, turning a repetitive domestic chore into an agreeable easy-to-do job. With the central power unit (combined motor and dust container) stowed away on the loft, in the basement, or in some remote location where it bothers no one, it is out of the way, and the only thing you need to carry around when vacuuming is the hose itself. A clever precaution against asthma, eczema and other allergies as all dust pick up is directed out of the rooms through the sealed tubes. If you need a machine that takes up little space, this is the one to choose. It offers you the performance needed in houses up to 100 sqm, or a pipe line of maximum 30 meters.



TECHNICAL DATA	NILFISK SUPREME 100 EU 50-60HZ 220-230V
D	4250
Rated power (W)	1350
Vacuum (kPa)	30
Weight (kg)	5,5
Container capacity (I)	-
Dust bag capacity (I)	10
Suction power motor (W)	650
Height (cm)	42,7
Sound level	66
Width with handle (cm)	36
Airflow (I/sec.) measured at central unit	57
Depth w./ bracket (cm)	40
Fuse circuit (A)	10
Maximum house size (m²)	100
Longest pipe line (m)	30
FEATURES	
Softstart	•
Low working sound level	•
On/off on machine	•
STANDARD EQUIPMENT	
BAG FILTER	140 8514 500
ITEM NO.	107404969

### Nilfisk Supreme LCD – Central vacuum cleaners





#### Nilfisk Central Vacs. For houses up to 500 sqm.

- LCD info center on the machine, where information on: Indicator for dust bag / filter change, suction level, indicator for service needed, indicator for overheated product, indicator for reduced airflow, indicator for handle is out of reach
- Can be used with or without a bag
- Dust container with cyclone system
- Low working sound
- The central unit is equipped with start stop function
- Build in soft start system
- The build in sack filter is self-cleaning through the movement, when the central units starts / stops



A central vacuum cleaner does just that. It is extremely quiet, odour free, lightweight and handy, turning a repetitive domestic chore into an agreeable easy-to-do job. With the central power unit (combined motor and dust container) stowed away on the loft, in the basement, or in some remote location where it bothers no one, it is out of the way, and the only thing you need to carry around when vacuuming is the hose itself. A clever precaution against asthma, eczema and other allergies as all dust pick up is directed out of the rooms through the sealed tubes.

High performance in houses up to 500 sqm Nilfisk Supreme LCD is a central power unit with a LCD info center display, where information on status of the machine performance is displayed.



TECHNICAL DATA	NILFISK SUPREME LCD EU 50-60HZ 220-230V
Rated power (W)	1700
Vacuum (kPa)	30
Weight (kg)	6,5
Container capacity (I)	25
Dust bag capacity (I)	20
Suction power motor (W)	727
Height (cm)	80
Sound level	66
Width with handle (cm)	37
Airflow (I/sec.) measured at central unit	60
Depth w./ bracket (cm)	40
Fuse circuit (A)	10
Maximum house size (m²)	500
Longest pipe line (m)	70
FEATURES	
Softstart	•
Low working sound level	•
Display on machine	•
On/off on machine	•
STANDARD EQUIPMENT	
BAG FILTER	140 8514 500
ITEM NO.	107404972

### Nilfisk Supreme 250 - Central vacuum cleaners







#### Central Vacuum Cleaner for houses up to 250 sqm

- Can be used with or without a bag
- Dust container with cyclone system
- Low working sound
- The central unit is equipped with start/stop function
- Build in soft start system
- The build in sack filter is self-cleaning through the movement, when the central units starts / stops

Vacuum cleaning the easy way.

A central vacuum cleaner does just that. It is extremely quiet, odour free, lightweight and handy, turning a repetitive domestic chore into an agreeable easy-to-do job. With the central power unit (combined motor and dust container) stowed away on the loft, in the basement, or in some remote location where it bothers no one, it is out of the way, and the only thing you need to carry around, when vacuuming is the hose itself. A clever precaution against asthma, eczema and other allergies as all dust pick up is directed out of the rooms through the sealed tubes.

The Supreme 250 central power unit gives you performance you need in a house up to 250 sqm or a pipe line of maximum 50 meters.



TECHNICAL DATA	NILFISK SUPREME 250 EU 50-60HZ 220-230V									
Rated power (W)	1700									
Vacuum (kPa)	30									
Weight (kg)	6,5									
Container capacity (I)	25									
Dust bag capacity (I)	20									
Suction power motor (W)	712									
Height (cm)	80									
Sound level	66									
Width with handle (cm)	37									
Airflow (I/sec.) measured at central unit	58									
Depth w./ bracket (cm)	40									
Fuse circuit (A)	10									
Maximum house size (m²)	250									
Longest pipe line (m)	50									
FEATURES										
Softstart	•									
Low working sound level	•									
On/off on machine	•									
STANDARD EQUIPMENT										
BAG FILTER	140 8514 500									
ITEM NO.	107404971									

### Nilfisk Supreme 150 – Central vacuum cleaners







#### Central Vacuum Cleaner for houses up to 150 sqm

- Can be used with or without a bag
- Dust container with cyclone system
- Low working sound
- The central unit is equipped with start/stop function
- Build in soft start system
- The build in sack filter is self-cleaning through the movement, when the central units starts / stops

Vacuum cleaning the easy way.

A central vacuum cleaner does just that. It is extremely quiet, odour free, lightweight and handy, turning a repetitive domestic chore into an agreeable easy-to-do job. With the central power unit (combined motor and dust container) stowed away on the loft, in the basement, or in some remote location where it bothers no one, it is out of the way, and the only thing you need to carry around, when vacuuming is the hose itself. A clever precaution against asthma, eczema and other allergies as all dust pick up is directed out of the rooms through the sealed tubes. The Supreme 150 central power unit gives you performance you need in a house up to 150 sqm or a pipe line of maximum 30 meters.



TECHNICAL DATA	NILFISK SUPREME 150 EU 50-60HZ 220-230V
Rated power (W)	1350
Vacuum (kPa)	30
Weight (kg)	6,5
Container capacity (I)	25
Dust bag capacity (I)	20
Suction power motor (W)	641
Height (cm)	80
Sound level	66
Width with handle (cm)	37
Airflow (I/sec.) measured at central unit	57
Depth w./ bracket (cm)	40
Fuse circuit (A)	10
Maximum house size (m²)	150
Longest pipe line (m)	30
FEATURES	
Cyclone system	•
Softstart	•
Low working sound level	•
Self-cleaning filter	•
Use with or without bag	•
On/off on machine	•
STANDARD EQUIPMENT	
BAG FILTER	140 8514 500
ITEM NO.	107404970


## **Accessories for Vacuum cleaners**

	Dust Bag and Filter	NILFISK ALL-IN-1 SUPREME 150 DELUXE EU	NILFISK ALL-IN-1 SUPREME 150 MAN EU	NILFISK ALL-IN-1 SUPREME 150 WIRELESS+EU	NILFISK ALL-IN-1 SUPREME 150 WIRELESS+EU	NILFISK ALL-IN-1 SUPREME 250 DELUXE EU	NILFISK ALL-IN-1 SUPREME 250 MAN EU	NILFISK ALL-IN-1 SUPREME 250 WIRELESS+EU	NILFISK ALL-IN-1 SUPREME 250 WIRELESS+EU	NILFISK ALL-IN-1 SUPREME LCD DELUXE EU	NILFISK ALL-IN-1 SUPREME LCD DELUXE EU	NILFISK ALL-IN-1 SUPREME LCD WIRELESS+EU	NILFISK SUPREME 100 EU 50-60HZ 220-230V	NILFISK SUPREME LCD EU 50-60HZ 220-230V	NILFISK SUPREME 250 EU 50-60HZ 220-230V	NILFISK SUPREME 150 EU 50-60HZ 220-230V	tem no.
	BAG FILTER	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	140 8514 500
	DUST BAGS SMALL CV	•	•	•	•	•	•	•	•	•	•	•	0	0	0	0	107401158
	Hose and Connection  NILFISK CV HOSEKIT DELUXE 9M EU 433MHZ	•	0	0	0	•	0	0	0	•	0	0	0	0	0	0	107405106
	NILFISK CV HOSEKIT DELUXE 12M EU 433MHZ	0	0	0	0	0	0	0	0	0	•	0	0	0	0	0	107405109
	NILFISK CV HOSEKIT MANUAL 9M	0	•	0	0	0	•	0	0	0	0	0	0	0	0	. 0	107405104
	NILFISK CV HOSEKIT MANUAL 12M	0	0	. 0	0	0	0	0	0	0	. 0	. 0	. 0	. 0	0	. 0	107405107
	NILFISK CV HOSEKIT WIRELESS 9M EU 433MHZ	0	0	•	0	0	0	•	•	0	0	•	0	. 0	0	0	107405105
	NILFISK CV HOSEKIT WIRELESS 12M EU433MHZ	0	0	0	•	0	0	0	0	0	0	0	0	0	0	0	107405108
	NILFISK NEW TELESCOPIC TUBE	•	•	•	•	•	•	•	•	•	•	•	0	0	0	0	107408043
	Nozzle - Vacuum NILFISK NEW BRUSH NOZZLE	•	•	•	•	•	•	•	•	•	•	•	0	0	0	0	107408040
ba	NILFISK NEW COMBI NOZZLE	•	•	•	•	•	•	•	•	•	•	•	0	0	-	0	107408042
	CREVICE NOZZLE	•	•	•	•	•	•	•	•	•	•	•	. 0	. 0	0	. 0	107408039
1	NILFISK NEW UPHOLSTERY NOZZLE	•	•		•	•	•	•	•	•	. •	•	. 0	. 0	. 0	. 0	107408041
	Accessory ADAPTER FLOOR INLET	0				0	0		0	0	0	0	0		0	0	42000244
	FLOOR INLET CHROME	0	0	. 0	0	0	0	0	0	0	. 0	. 0	. 0	. 0	. 0	. 0	42000243
	Hose and Connection HOSE FLEXIBLE 1 TO 6 M	0		0		0	0	0	0	0	0	0		••••	0	0	42000122
19	Accessory	••••		• • • • • •			0		0								42000237

<sup>●</sup> Standard accessories
O Supplementary accessories
□ Supplementary and mountable accessories

## **Accessories for Vacuum cleaners**

	AE 150 DELUXE EU	AE 150 MAN EU	AE 150 WIRELESS+EU	AE 150 WIRELESS+EU	AE 250 DELUXE EU	AE 250 MAN EU	AE 250 WIRELESS+EU	AE 250 WIRELESS+EU	AE LCD DELUXE EU	AE LCD DELUXE EU	AE LCD WIRELESS+EU	J 50-60HZ 220-230V	J 50-60HZ 220-230V	J 50-60HZ 220-230V	J 50-60HZ 220-230V	
	NILFSK ALL-IN-1 SUPREME 150 DELUXE EU	NILFISK ALL-IN-1 SUPREME 150 MAN EU	NILFISK ALL-IN-1 SUPREME 150 WIRELESS+EU	NILFISK ALL-IN-1 SUPREME 150 WIRELESS+EU	NILFISK ALL-IN-1 SUPREME 250 DELUXE EU	NILFISK ALL-IN-1 SUPREME 250 MAN EU	NILFISK ALL-IN-1 SUPREME 250 WIRELESS+EU	NILFISK ALL-IN-1 SUPREME 250 WIRELESS+EU	NILFISK ALL-IN-1 SUPREME LCD DELUXE EU	NILFISK ALL-IN-1 SUPREME LCD DELUXE EU	NILFISK ALL-IN-1 SUPREME LCD WIRELESS+EU	NILFISK SUPREME 100 EU 50-60HZ 220-230V	NILFISK SUPREME LCD EU 50-60HZ 220-230V	NILFISK SUPREME 250 EU 50-60HZ 220-230V	NILFISK SUPREME 150 EU 50-60HZ 220-230V	Item no.
Accessory							•				•		•		•	
VACPAN ALU WITH BEND AND TEE IN BAG	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	42000238
			•			•	•	•		•	•	•	•		•	-
VACPAN BLACK					0		. 0	. 0	. 0							42000235
VACFAIN BLACK	0		. 0	0	O				. 0		. 0	. 0	. 0		. 0	42000233
***************************************			•			•	•	•			•	•	•		•	•
VACPAN WHITE	0	0	0	0	0	0	0	0	. 0	0	0	0	0	0	0	42000233
•			•			•	•	•		•		•	•	•	•	•
			•				•			•	•				•	
VACPAN WHITE WITH BEND AND TEE IN BAG	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	42000234
			•			•	•	•		•	•	•	•		•	
VACSOC HOSECOVER	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	42000303
										•			•			
 •	<b>.</b>								•		• • • • • •		• • • • • •		• • • • • •	• • • • • • • • • • • • • • • • • • • •
Accessory Kit									-							-
3 INLET FITTINGS AND PIPES KIT	•	•	. •	•	•	. •	•	•	•	•	. •	0	. 0	. 0	. 0	42000202
								<b>-</b>								
- A NA FEE FEET NECK AND DIRECTOR																
1 INLET FITTINGS AND PIPES KIT	. 0	. 0	0	. 0	0	. 0	0	. 0	. 0	0	0	0	. 0	. 0	. 0	42000200
							•			•	•				•	
3 INLET FITTINGS KIT	. 0	. 0	. 0	. 0	0	. 0	. 0	. 0	. 0	. 0	. 0	. 0	. 0	. 0	. 0	42000205
			•			•	• · · · · · · · · · · · · · · · · · · ·			•	•	•	•		•	•
INSTALLATION KIT FOR VACPAN	0	0	. 0	0	0	0	0	0	. 0	0	0	0	0	0	0	42000484
•			•	•			•			•	•		•		•	•

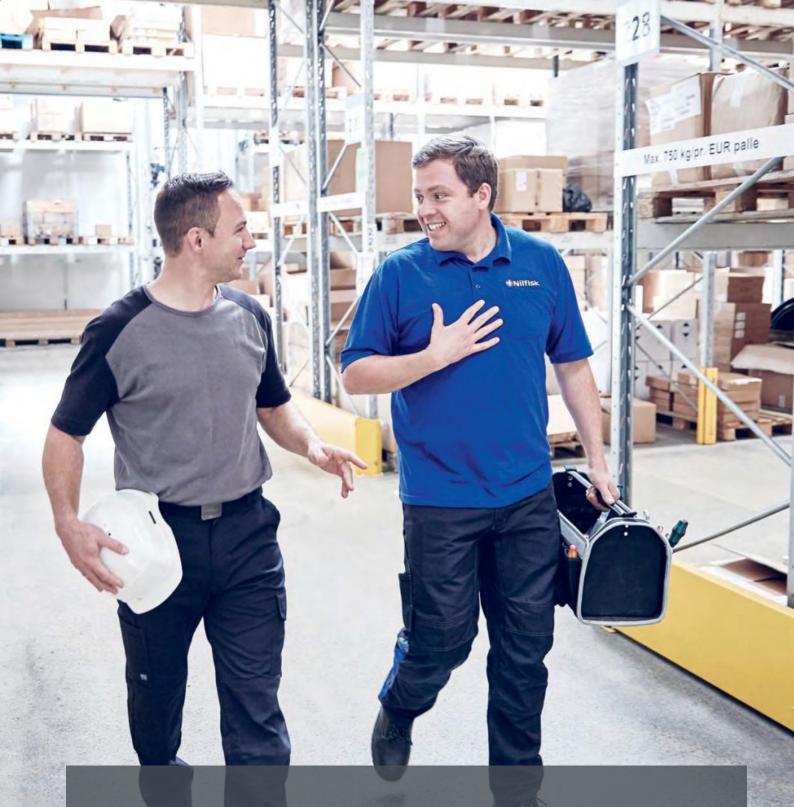


### **Benefits with real value**

Equipment is an investment, and Nilfisk Service protects that investment by maintaining the durability and performance of your Nilfisk machine.

With Nilfisk Service, you can:

- Maximize uptime with proactive maintenance and timely repairs and restoration
- Protect equipment value with documented service and Nilfisk-certified spare parts
- Keep maintenance costs low and predictable

With the goal of sustaining efficient performance and productivity over an entire equipment lifecycle, Nilfisk Service helps ensure the viability of your cleaning operation.

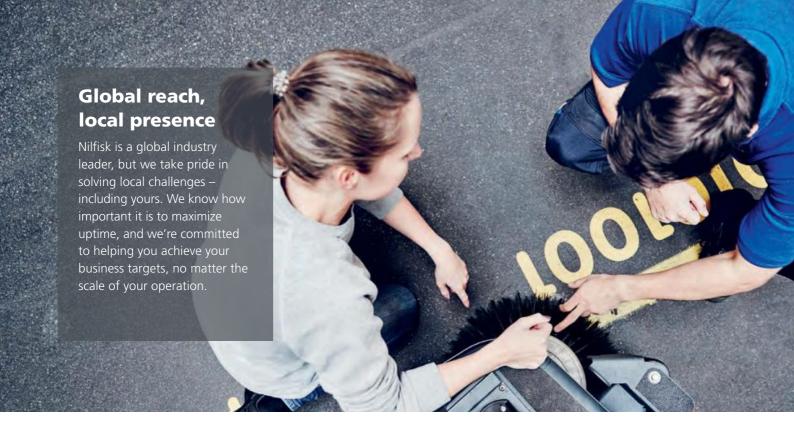

Nilfisk offers four Service Solutions, each with a unique offering.

		PRO	PLUS	PREMIUM	PREMIUM POWER
		Professional maintenance	Optimized productiv- ity	Maximized uptime	Maximized coverage
NCE	Annual maintenance visits	1-6	1-6	2-6	2-6
MAINTENANCE	Travel	•	•	•	•
MAII	Labor – planned maintenance	•	•	•	•
S	Response time	48H	48H	24H	24H
REPAIRS	Travel		•	•	•
~	Labor – inspection & repair		•	•	•
	Spare parts		•	•	•
PARTS	Consumables			•	•
	Batteries & chargers				•
VAL FS	Extended warranty	+1Y	+1Y	+1Y	+1Y
ADDITIONAI BENEFITS	Service reports	•	•	•	•
AD	Dedicated technician	•	•	•	•

The conditions and specifics of each element included in Nilfisk Service Solutions may be subject to local availability.



